



B5F Type

Dimensions 外形寸法

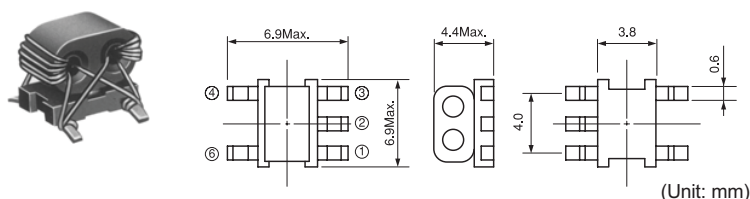

(Unit: mm)

Recommended patterns 推奨パターン



(Unit: mm)

● RoHS compliant


● RoHS 指令対応

Transformers for Frequency Mixer ミキサ用トランス


TOKO Part No.	Winding Turns 1-6=2-4=2-6=3-4	μ iac
#458DB-1614	2 1/2 T	300
#458DB-1615	3 1/2 T	300
#458DB-1616	4 1/2 T	300

Typical Characteristics 代表特性例


1) #458DB-1614 (Impedance Ratio=50 Ω :200 Ω)

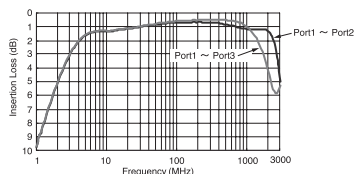

3) #458DB-1616 (Impedance Ratio=50 Ω :200 Ω)



Test Circuit 測定回路




2) #458DB-1615 (Impedance Ratio=50 Ω :200 Ω)

Transformers for Frequency Mixer ミキサ用トランス


TOKO Part No.	Winding Turns 1-2=2-3=4-6	μ iac
#458PT-1619	2 T	300
#458PT-1586	3 T	230
#458PT-1587	4 T	230
#458PT-1565	5 T	230

Typical Characteristics 代表特性例


1) #458PT-1619 (Impedance Ratio=50 Ω :200 Ω)




3) #458PT-1587 (Impedance Ratio=50 Ω :200 Ω)




Test Circuit 測定回路



2) #458PT-1586 (Impedance Ratio=50 Ω :200 Ω)

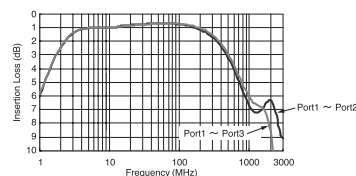

4) #458PT-1565 (Impedance Ratio=50 Ω :200 Ω)




B5F Type

Splitters/Directional Couplers 分岐器/方向性結合器


TOKO Part No.	Winding Turns 1-6=3-4	2-4=2-6	BR I.L.(dB) at 100MHz	μ iac
#458PS-1623	1/2 T	3 1/2 T	12.5	300
#458PS-1624	1/2 T	4 1/2 T	14.0	300
#458PS-1625	1/2 T	5 1/2 T	16.0	300

Test Circuit 測定回路

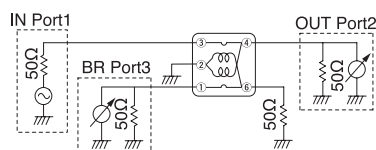


Typical Characteristics 代表特性例

1) #458PS-1623 50Ω系

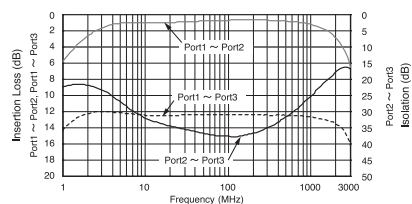

2) #458PS-1624 50Ω系

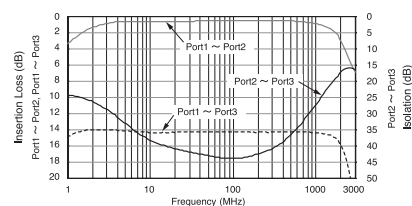

3) #458PS-1625 50Ω系

