


SKKE 120F

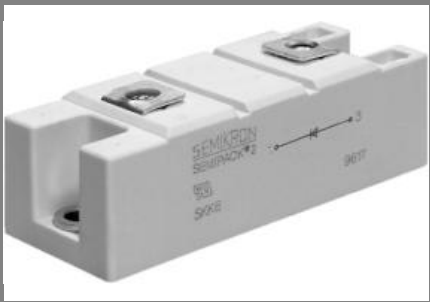

SEMIPACK® 2

Fast Diode Modules

SKKE 120F

Features

- CAL (controlled axial lifetime) chip technology, patent No. DE 43 10 44
- Heat transfer through ceramic isolated metal baseplate
- Very short recovery times
- Soft recovery
- Low switching losses
- UL recognized, file no. E 63 532

Typical Applications






- Self-commutated inverters
- DC choppers
- AC motor speed control
- inductive heating
- Uninterruptible power supplies
- Electronic welders
- General power switching applications
- snubber and free wheeling circuits

V_{RSM} V	V_{RRM} V	$I_{FRMS} = 220\text{ A}$ (maximum value for continuous operation) $I_{FAV} = 120\text{ A}$ (sin. 180; 50 Hz; $T_c = 82\text{ °C}$)	
1700	1700	SKKE 120F17	



Symbol	Conditions	Values	Units
I_{FAV}	sin. 180; $T_c = 85\text{ (100) °C}$	116 (87)	A
I_{FSM}	$T_{vj} = 25\text{ °C}; 10\text{ ms}$	2000	A
	$T_{vj} = 150\text{ °C}; 10\text{ ms}$	1800	A
i^2t	$T_{vj} = 25\text{ °C}; 8,3 \dots 10\text{ ms}$	20000	A²s
	$T_{vj} = 150\text{ °C}; 8,3 \dots 10\text{ ms}$	16200	A²s
V_F	$T_{vj} = 25\text{ °C}; I_F = 200\text{ A}$	max. 2,7	V
$V_{(TO)}$	$T_{vj} = 150\text{ °C}$	max. 1,5	V
r_T	$T_{vj} = 150\text{ °C}$	max. 4,5	mΩ
I_{RD}	$T_{vj} = 25\text{ °C}; V_{RD} = V_{RRM}$	max. 0,4	mA
I_{RD}	$T_{vj} = 125\text{ °C}; V_{RD} = V_{RRM}$	max. 50	mA
Q_{rr}	$T_{vj} = 125\text{ °C}; I_F = 120\text{ A},$ $-di/dt = 1000\text{ A/μs}, V_R = 1200\text{ V}$	41	μC
I_{RM}		110	A
t_{rr}		1020	ns
E_{rr}		10	mJ
$R_{th(j-c)}$		0,2	K/W
$R_{th(c-s)}$		0,05	K/W
T_{vj}		- 40 ... + 150	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	4800 / 4000	V~
M_s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	5 ± 15 %	Nm
a		5 * 9,81	m/s²
m	approx.	160	g
Case		A 54	



SKKE

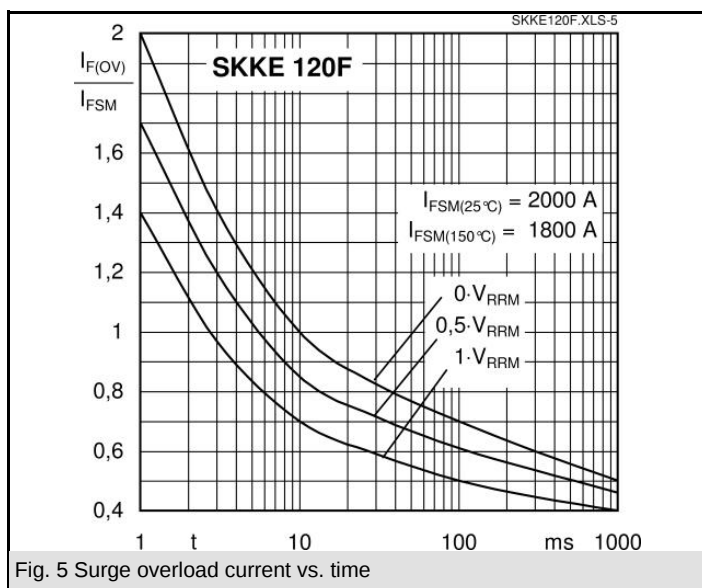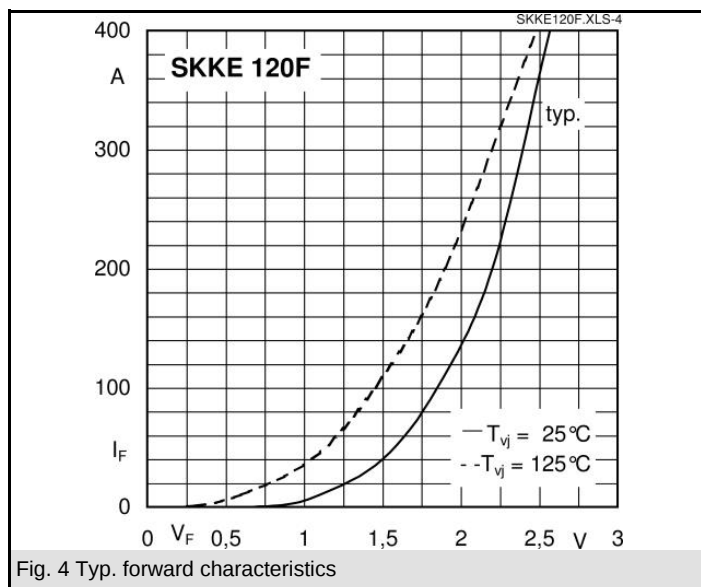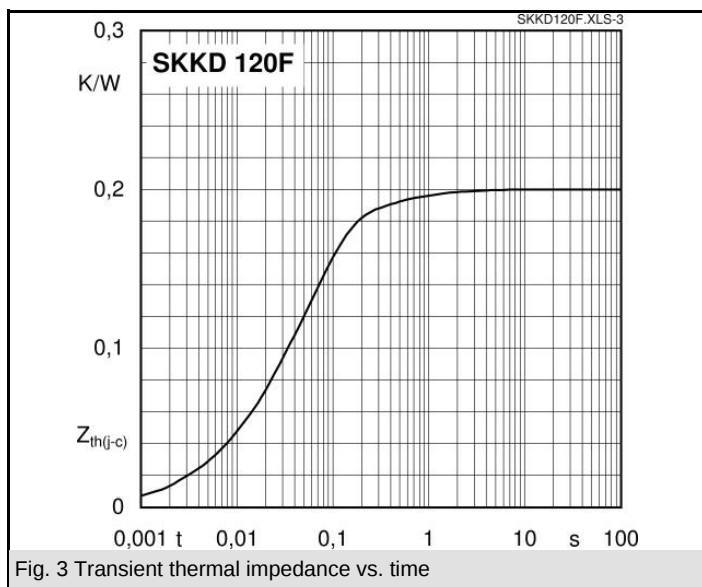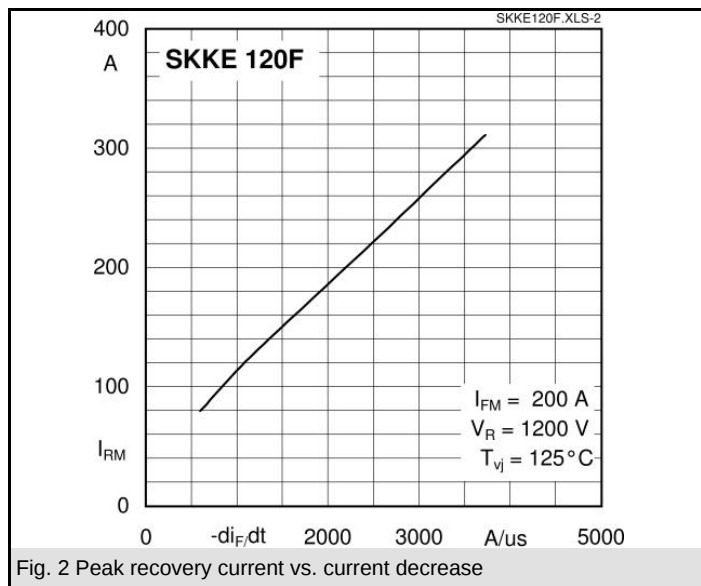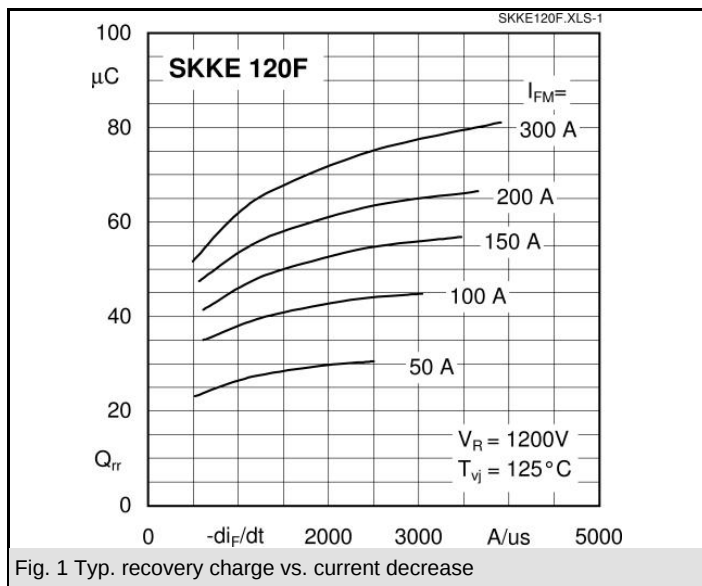

SKKE 120F THYRISTOR BRIDGE SCR BRIDGE

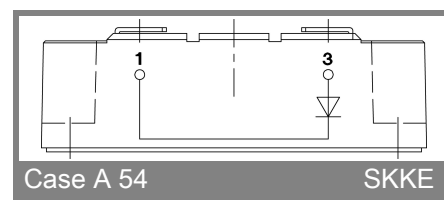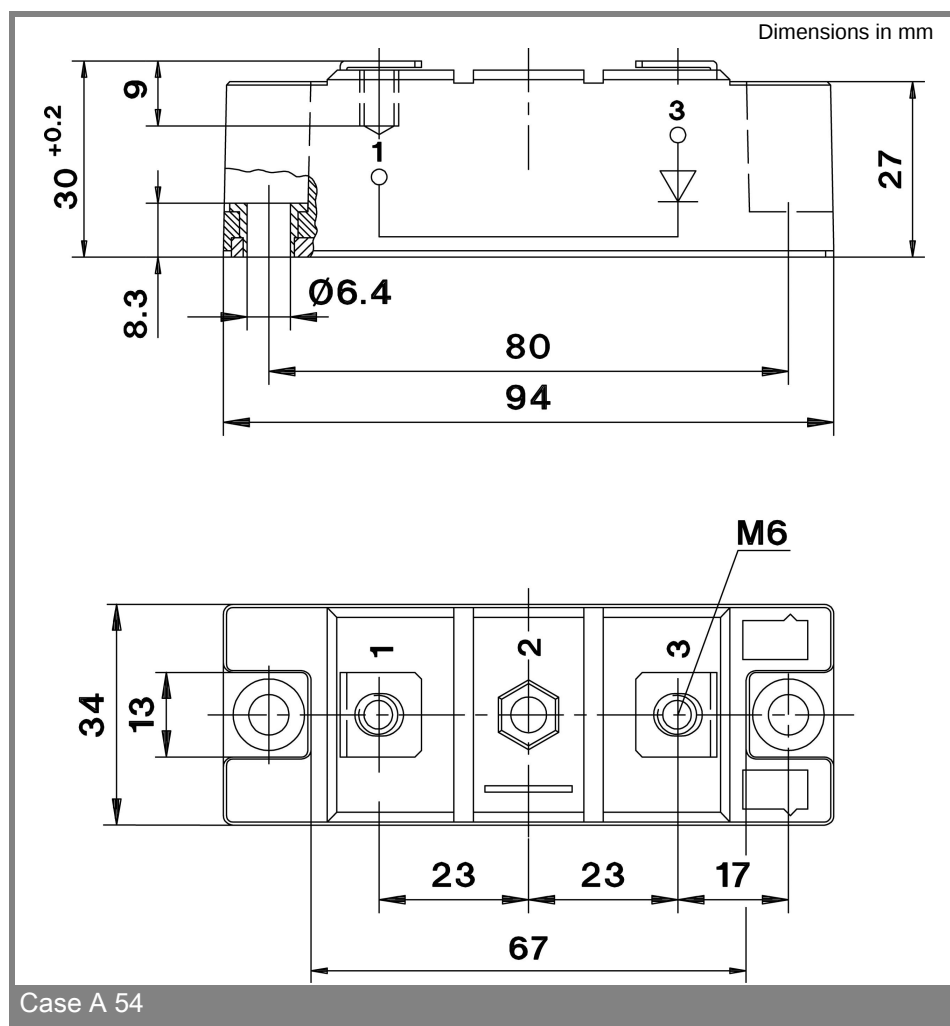

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.