



# WBA80180AC

## 8.0- 18.0 GHz LOW NOISE WIDE BAND AMPLIFIER

REV A  
November 2009

### Key Features



- 8.0 ~ 18.0 GHz
- 2.0 dB noise figure
- TTL Enable Control
- 22.0 dB Gain
- +/-1.0 dB Gain Flatness
- 13.0 dBm P<sub>1dB</sub>
- 1.6:1 VSWR
- Single power supply
- >68 years MTBF
- Unconditional Stable
- RoHS compliant

### Product Description

WBA80180AC integrates WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single +5.0V DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-11C gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202.

### Applications

- Mobile Infrastructures
- X-Band
- Ku-Band
- VSAT
- Fixed Wireless

### Specifications

Summary of the electrical specifications WBA80180AC at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S <sub>21</sub>	8.0 – 18.0 GHz	12	22	16	dB
2	Gain Variation	ΔG	8.0 – 18.0 GHz		+/- 1.0		dB
3	Input VSWR	SWR <sub>1</sub>	8.0 – 18.0 GHz		1.6:1	2:4	Ratio
4	Output VSWR	SWR <sub>2</sub>	8.0 – 18.0 GHz		1.6:1	2:1	Ratio
5	Reverse Isolation	S <sub>12</sub>	8.0 – 18.0 GHz		40		dB
6	Noise figure	NF	8.0 – 18.0 GHz		2.0	2.5	dB
7	Output Power 1dB compression Point	P <sub>1dB</sub>	8.0 – 18.0 GHz	10	13		dBm
8	Current Consumption	I <sub>dd</sub>	V <sub>dd</sub> = +5 V		60		mA
9	Power Supply Voltage	V <sub>dd</sub>		+4.7	+5.0	+5.5	V
10	Thermal Resistance	R <sub>thc</sub>	Junction to case			100	°C/W
11	TTL ON/OFF Control	V <sub>en</sub>	Amplifier ON	0.7		5.0	V
12	Operating Temperature	T <sub>o</sub>		-40		+85	°C
13	Maximum Average RF Input Power	P <sub>IN, MAX</sub>	8.0 – 18.0 GHz			10	dBm

### Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	6
Drain Current	mA	70
Total Power Dissipation	mW	400
RF Input Power	dBm	10
Channel Temperature	°C	150
Storage Temperature	°C	-55 ~ 125
Operating Temperature	°C	-40 ~ 85
Thermal Resistance	°C/W	100

Operation of this device above any one of these parameters may cause permanent damage.

### Functional Block Diagram

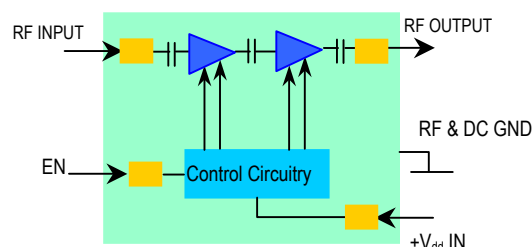

### Ordering Information

Model Number	WBA80180AC-1	WBA80180AC-2
Input Connector	SMA Female	SMA Male

# Preliminary


Specifications and information are subject to change without notice.

WanTcom, Inc \* Phone 01 952 746 6088 \* FAX: 01 952 746 8818 \* e-mail: sales@wantcominc.com \* Web site: [www.wantcominc.com](http://www.wantcominc.com)

**WBA80180AC****8.0- 18.0 GHz LOW NOISE WIDE BAND AMPLIFIER****REV A****November 2009**

## Typical Data

UNITS: INCH  
[mm]  
BODY: Brass  
Finish: Gold Plating  
Input Connector: SMA F/M Gold  
Output Connector: SMA F Gold  
V<sub>dd</sub> PWR: Feed through

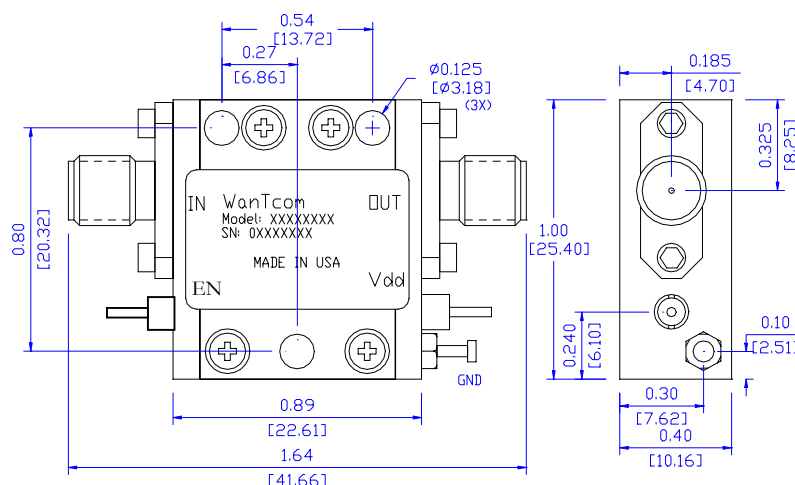

## Outline, WP-11C Housing

UNITS: INCH [mm]  
Base Material: Brass.  
Finish: Gold Plating.  
SMA F, 2 X

## Application Notes:

### A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

### B. DC Power Line Connection

Strip the insulation layer at the end of DC power supply wire. The stripped distance should be in the range of 0.100" to 0.200". The 24 ~ 26 American Wire Gauge wire is suitable. Wound the stripped terminal wire about 1 to 2 turns on the DC feed thru center pin. Solder the wounded wire and the center pin together. Clean the soldering area by Q-tip with alcohol to remove the flux and residue.

Repeat the process to solder the DC return wire on the ground turret.

### C. Mounting the Amplifier

Use three pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

\*\*\*\*\*

Specifications and information are subject to change without notice.

WanTcom, Inc \* Phone 01 952 746 6088 \* FAX: 01 952 746 8818 \* e-mail: [sales@wantcominc.com](mailto:sales@wantcominc.com) \* Web site: [www.wantcominc.com](http://www.wantcominc.com)