flow PFC 0 — 600 V/ 2 x 99mOhm / 200 kHz

Features
- Vincotech clip-in housing
- Compact and low inductance design
- Suitable for Interleaved topology
- Suitable for curent sensing in drain
- CP series CoolMOS™ and SiC boost FRED

flow 0 housing

Target Applications
- PFC for welding
- PFC for SMPS
- PFC for motor drives
- PFC for UPS
- PFC for battery charger

Types
- FZ062TA099FH; without SCR, current sense in drain
- FZ062TA099FH01; with SCR, current sense in drain

Schematic
FZ062TA099FH *FZ062TA099FH01*



Maximum Ratings

T_j=25°C, unless otherwise specified

Parameter	Symbol	Condition		Value	Unit
Input Rectifier Diode					
Repetitive peak reverse voltage	V_{RRM}			1600	V
DC forward current	I_F	T_j=$T_j$max	T_h=80°C T_c=80°C	35	A
Surge forward current	I_{FSM}	t_p=10ms	T_j=25°C	250	A
I2t-value	I^2t			310	A^2s
Power dissipation per Diode	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	40	W
Maximum Junction Temperature	$T_j$max			150	°C
Input Rectifier Thyristor					
Repetitive peak reverse voltage	V_{RRM}			800	V
DC forward current	I_F	T_j=$T_j$max	T_h=80°C T_c=80°C	34	A
Surge forward current	I_{FSM}	t_p=10ms	T_j=25°C	250	A
I2t-value	I^2t			310	A^2s
Power dissipation per Thyristor	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	44	W
Maximum Junction Temperature	$T_j$max			150	°C
PFC MOSFET					
Drain to source voltage	V_{DS}			600	V
DC drain current	I_D	T_j=$T_j$max	T_h=80°C T_c=80°C	16	A
Pulsed drain current	I_{Dpulse}	t_p limited by $T_j$max		93	A
Avalanche energy, single pulse	E_{AS}	I_D=11 A V_{DD}=50 V		800	mJ
Avalanche energy, repetitive	E_{AR}	I_D=11A V_{DD}=50V	t_{AR} limited by Tjmax	1.2	mJ
Avalanche current, repetitive	I_{AR}	t_p limited by Tjmax		11	A

CoolMOS is a trademark of Infineon Technologies AG

Copyright by Vincotech

Maximum Ratings

T_j=25°C, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
dv/dt ruggedness	dv/dt	V_{DS}=0...480V	50	V/ns
Reverse diode dv/dt	dv/dt		15	V/ns
Power dissipation	P_{tot}	T_j=$T_j$max; T_h=80°C, T_c=80°C	62	W
Gate-source peak voltage	V_{GS}		+/- 20	V
Maximum Junction Temperature	$T_j$max		150	°C
C.T. Inverse diode				
Peak Repetitive Reverse Voltage	V_{RRM}	T_j=25°C	600	V
DC forward current	I_F	T_j=$T_j$max; T_h=80°C, T_c=80°C	8	A
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j$max	16	A
Power dissipation per Diode	P_{tot}	T_j=$T_j$max; T_h=80°C, T_c=80°C	14	W
Maximum Junction Temperature	$T_j$max		175	°C
PFC Diode				
Peak Repetitive Reverse Voltage	V_{RRM}	T_j=25°C	600	V
DC forward current	I_F	T_j=$T_j$max; T_h=80°C, T_c=80°C	19	A
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j$max	64	A
Power dissipation	P_{tot}	T_j=$T_j$max; T_h=80°C, T_c=80°C	37	W
Maximum Junction Temperature	$T_j$max		175	°C
PFC Shunt				
DC forward current	I_F	T_c=25°C	31.6	A
Power dissipation per Shunt	P_{tot}	T_c=25°C	10	W
DC link Capacitor				
Max.DC voltage	V_{MAX}	T_c=25°C	500	V
Thermal Properties				
Storage temperature	T_{stg}		-40…+125	°C
Operation temperature under switching condition	T_{op}		-40…+(Tjmax - 25)	°C
Insulation Properties				
Insulation voltage	V_{is}	t=2s DC voltage	4000	V
Creepage distance			min 12,7	mm
Clearance			min 12,7	mm

Copyright by Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max	
Input Rectifier Diode										
Forward voltage	V_F				30	Tj=25°C Tj=125°C		1.16 1.11	1.4	V
Threshold voltage (for power loss calc. only)	V_{to}				30	Tj=25°C Tj=125°C		0.9 0.77		V
Slope resistance (for power loss calc. only)	r_t				30	Tj=25°C Tj=125°C		9 12		mΩ
Reverse current	I_r			1500		Tj=25°C Tj=150°C			0.02 2	mA
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ =1 W/mK						1.72		K/W
Input Rectifier Thyristor										
Forward voltage	V_F				30	Tj=25°C Tj=125°C		1.25 1.22	1.6	V
Threshold voltage (for power loss calc. only)	V_{to}				30	Tj=25°C Tj=125°C		0.93 0.82		V
Slope resistance (for power loss calc. only)	r_t				30	Tj=25°C Tj=125°C		0.011 0.014		mΩ
Reverse current	I_r			800		Tj=25°C Tj=125°C			0.05 2	mA
Gate controlled delay time	t_{GD}	Ig=0,5A dig/dt=0,5A/us		VD=1/2Vdrm		Tj=25°C			2	µs
Gate controlled rise time	t_{GR}	Ig=0,2A dig/dt=0,2A/us				Tj=25°C		<1		µs
Critical rate of rise of off-state voltage	(dv/dt)cr			VD=2/3Vdrm		Tj=125°C			500	V/µs
Critical rate of rise of on-state current	(di/dt)cr	Ig=0,2A f=50Hz		VD=2/3Vdrm	40	Tj=125°C			150	A/µs
Circuit commutated turn-off time	t_q	VD=2/3Vdrm tp=200us		100	26	Tj=125°C		150		µs
Holding current	I_H	VD=6V				Tj=25°C			50	mA
Latching current	I_L	tp=10us Ig=0,2A				Tj=25°C			90	mA
Gate trigger voltage	V_{GT}	VD=6V				Tj=25°C Tj=-40°C			1.3 1.6	V
Gate trigger current	I_{GT}	VD=6V				Tj=25°C Tj=-40°C	11		28 50	mA
Gate non-trigger voltage	V_{GD}			VD=1/2Vdrm		Tj=125°C			0.2	V
Gate non-trigger current	I_{GD}			VD=1/2Vdrm		Tj=125°C			1	mA
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						1.57		K/W
PFC MOSFET										
Avalanche breakdown voltage	$V_{(BR)DS}$		0		0.0003	Tj=25°C	600			V
Static drain to source ON resistance	$R_{DS(on)}$		10		18	Tj=25°C Tj=125°C		111 223		mΩ
Gate threshold voltage	$V_{(GS)th}$		Vds		0.0012	Tj=25°C Tj=125°C	2.5	3.0	3.9	V
Gate to Source Leakage Current	I_{GSS}		20	0		Tj=25°C Tj=125°C			200	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	600		Tj=25°C Tj=125°C			10	uA
Turn On Delay Time	$t_{d(ON)}$	Rgoff=4 Ω Rgon=4 Ω	10	400	15	Tj=25°C Tj=125°C		21 21		ns
Rise Time	t_r					Tj=25°C Tj=125°C		4 4		
Turn off delay time	$t_{d(OFF)}$					Tj=25°C Tj=125°C		71 73		
Fall time	t_f					Tj=25°C Tj=125°C		3 3		
Turn-on energy loss per pulse	E_{on}					Tj=25°C Tj=125°C		0.055 0.059		mWs
Turn-off energy loss per pulse	E_{off}					Tj=25°C Tj=125°C		0.008 0.013		
Total gate charge	Q_{GE}		0	400	18	Tj=25°C Tj=125°C		60		nC
Gate to source charge	Q_{GS}					Tj=25°C Tj=125°C		14		
Gate to drain charge	Q_{GD}					Tj=25°C Tj=125°C		20		
Input capacitance	C_{iss}	f=1MHz	0	100		Tj=25°C		2800		pF
Output capacitance	C_{oss}							130		
Reverse transfer capacitance	C_{rss}							2.5		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						1.13		K/W

Copyright by Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max	
C.T. Inverse diode										
Diode forward voltage	V_F				6	Tj=25°C Tj=125°C		1.66 1.61	2	V
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						5.12		K/W
PFC Diode										
Forward voltage	V_F				16	Tj=25°C Tj=150°C		1.53 1.68	1.8	V
Reverse leakage current	I_{rm}			600		Tj=25°C Tj=150°C			400	µA
Peak recovery current	I_{RRM}	Rgon=4 Ω	10	400	15	Tj=25°C Tj=150°C		24.4 21.9		A
Reverse recovery time	t_{rr}					Tj=25°C Tj=150°C		8 8		ns
Reverse recovery charge	Q_{rr}					Tj=25°C Tj=150°C		0.11 0.09		µC
Reverse recovered energy	E_{rec}					Tj=25°C Tj=150°C		0.02 0.02		mWs
Peak rate of fall of recovery current	di(rec)max /dt					Tj=25°C Tj=150°C		9935 7532		A/µs
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						2.56		K/W
PFC Shunt										
R1 value	R						9.4	10	10.6	mΩ
Temperature coeficient	t_c	20°C to 60°C						< 50		ppm/K
Internal heat resistance	R_{thi}							< 6.5		K/W
Inductance	L							< 3		nH
DC link Capacitor										
C value	C						480	540	600	nF
Thermistor										
Rated resistance	R					Tj=25°C		22		kΩ
Deviation of R100	ΔR/R	R25=22 KΩ				Tj=100°C	-5		5	%
Power dissipation	P					Tj=25°C			210	mW
Power dissipation constant						Tj=25°C		3.5		mW/K
B-value	$B_{(25/50)}$	Tol. ±3%				Tj=25°C		3940		K
B-value	$B_{(25/100)}$	Tol. ±3%				Tj=25°C		4000		K

Copyright by Vincotech

PFC Switch & C.T. Inverse Diode

Figure 1 Inverse diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

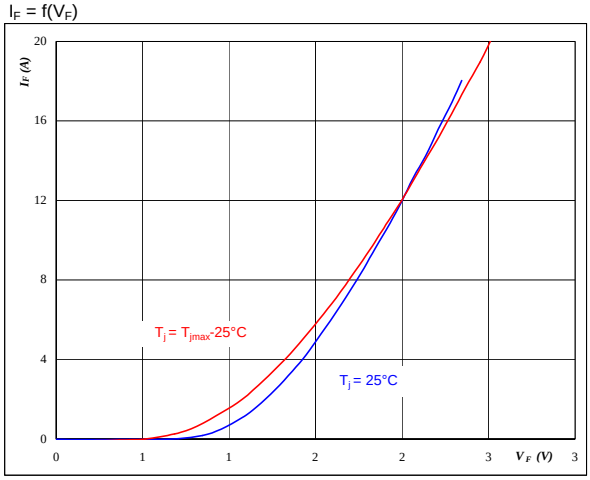

t_p = 250 µs

Figure 2 Inverse diode

Diode transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

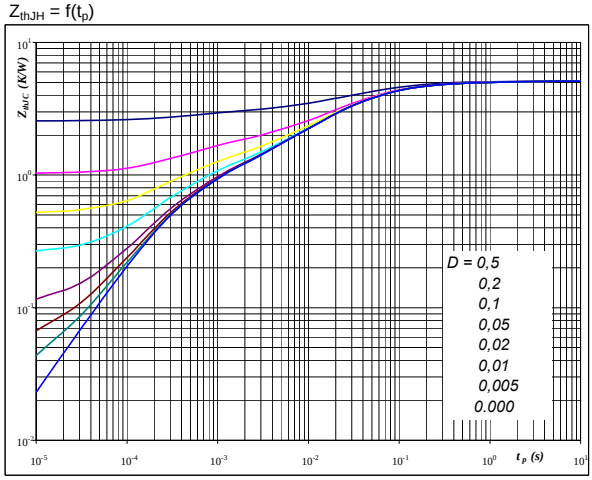

D = tp / T

R_{thJH} = 5.12 K/W

Figure 3 Inverse diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

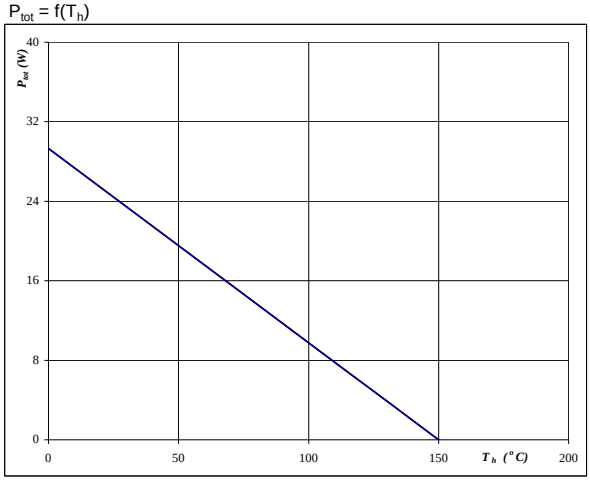

T_j = 150 ºC

Figure 4 Inverse diode

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

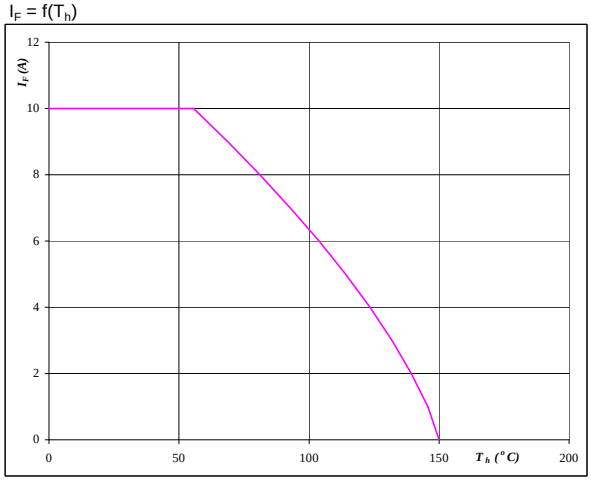

T_j = 150 ºC

Copyright by Vincotech

PFC

Figure 1 PFC MOSFET

Typical output characteristics

$I_D = f(V_{DS})$

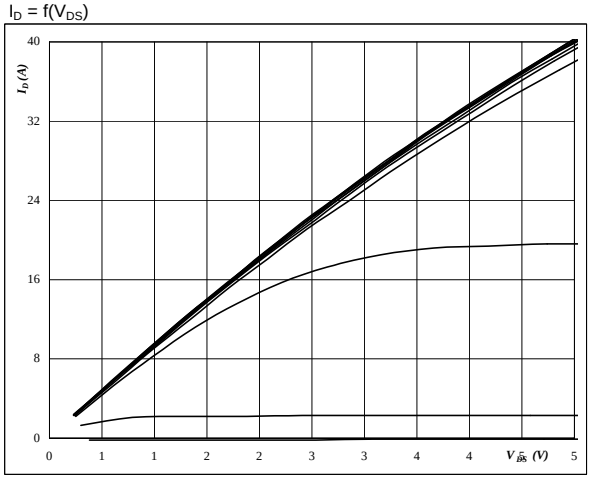

t_p = 250 µs
T_j = 25 °C
V_{GS} from 3 V to 13 V in steps of 1 V

Figure 2 PFC MOSFET

Typical output characteristics

$I_D = f(V_{DS})$

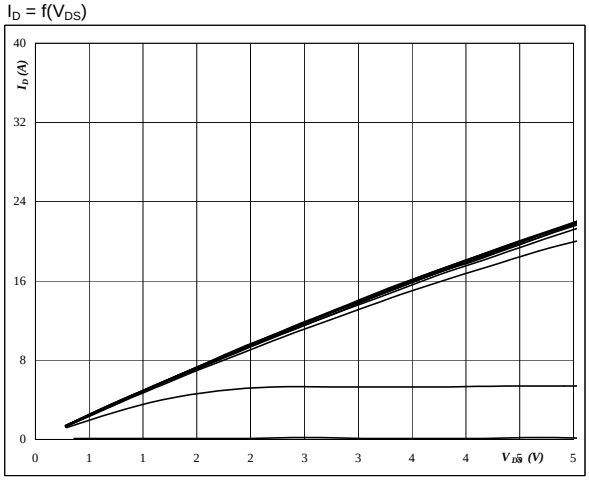

t_p = 250 µs
T_j = 125 °C
V_{GS} from 3 V to 13 V in steps of 1 V

Figure 3 PFC MOSFET

Typical transfer characteristics

$I_D = f(V_{DS})$

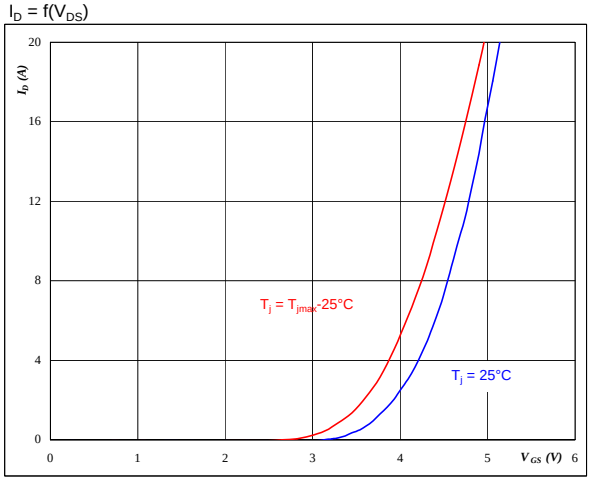

t_p = 250 µs
V_{DS} = 10 V

Figure 4 PFC MOSFET

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

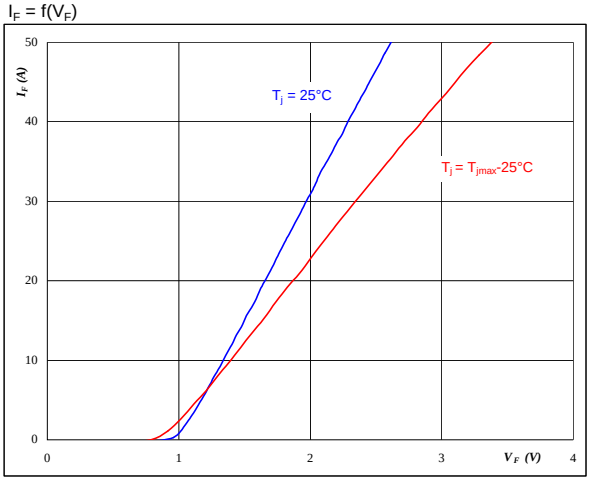

t_p = 250 µs

PFC

Figure 5 PFC MOSFET

Typical switching energy losses
as a function of collector current
$E = f(I_D)$

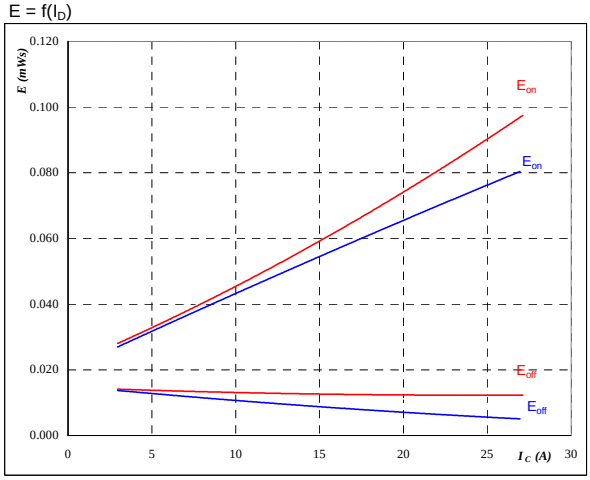

inductive load

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 6 PFC MOSFET

Typical switching energy losses
as a function of gate resistor
$E = f(R_G)$

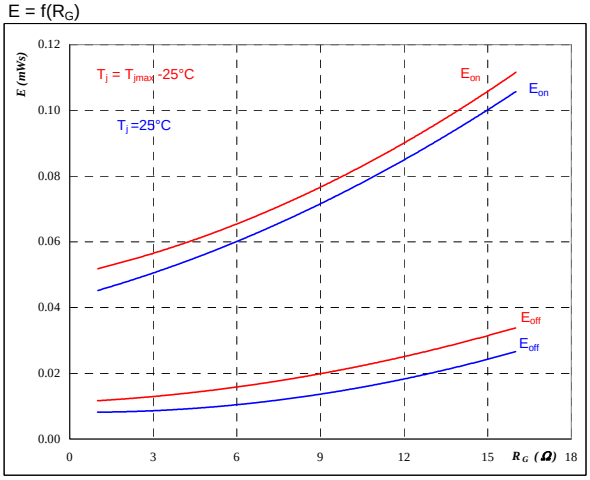

inductive load

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_D =	15	A

Figure 7 PFC MOSFET

Typical reverse recovery energy loss
as a function of collector (drain) current
$E_{rec} = f(I_c)$

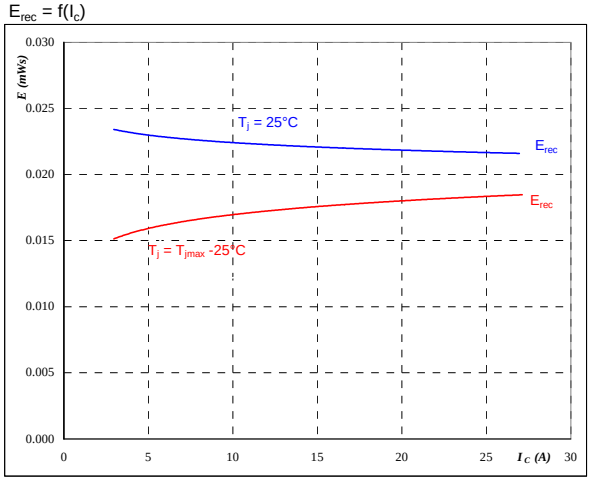

inductive load

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 8 PFC MOSFET

Typical reverse recovery energy loss
as a function of gate resistor
$E_{rec} = f(R_G)$

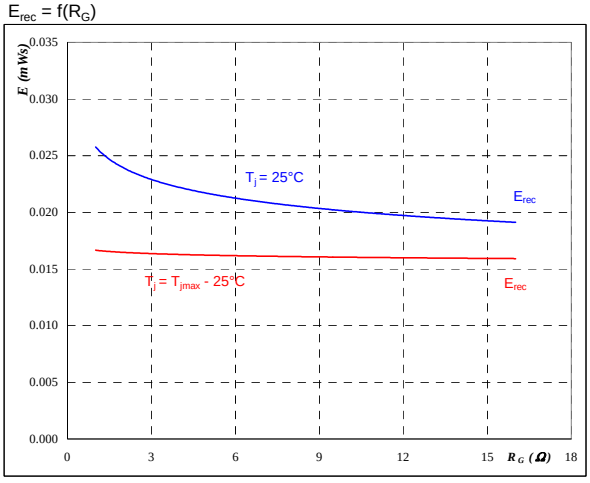

inductive load

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_D =	15	A

PFC

Figure 9 PFC MOSFET

Typical switching times as a function of collector current

$t = f(I_D)$

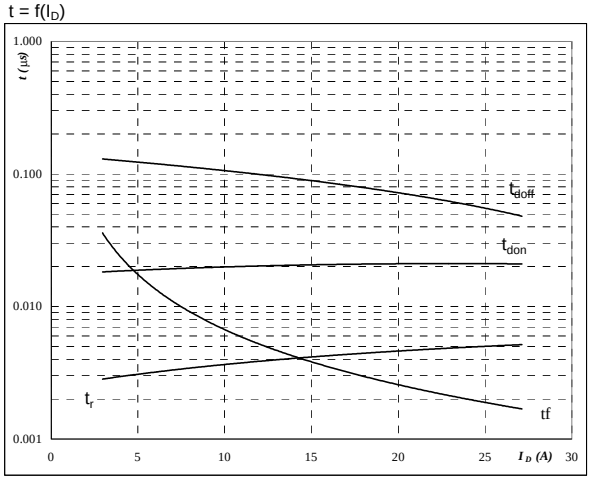

inductive load

T_j =	125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 10 PFC MOSFET

Typical switching times as a function of gate resistor

$t = f(R_G)$

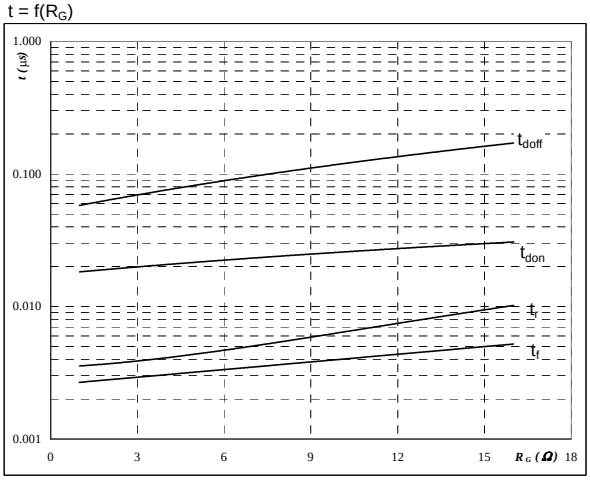

inductive load

T_j =	125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_C =	15	A

Figure 11 PFC FRED

Typical reverse recovery time as a function of collector current

$t_{rr} = f(Ic)$

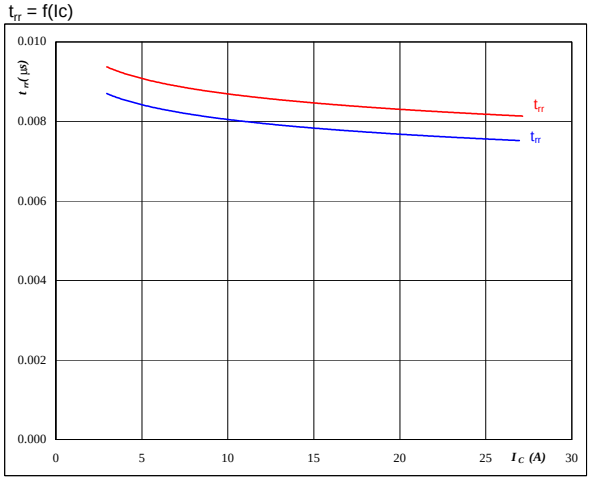

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 12 PFC FRED

Typical reverse recovery time as a function of IGBT turn on gate resistor

$t_{rr} = f(R_{gon})$

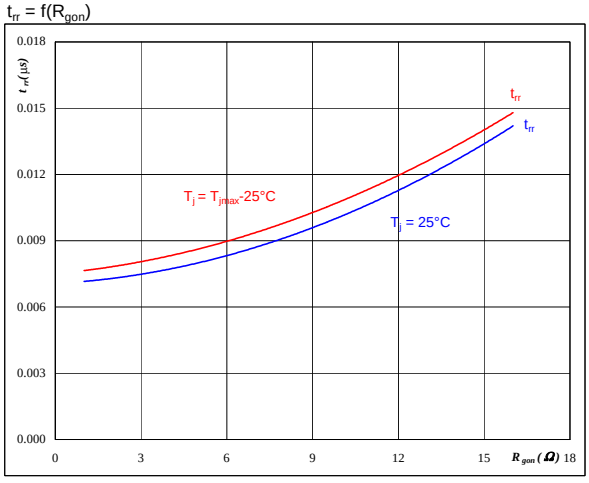

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

Copyright by Vincotech

PFC

Figure 13 PFC FRED

Typical reverse recovery charge as a function of collector current

$Q_{rr} = f(I_C)$

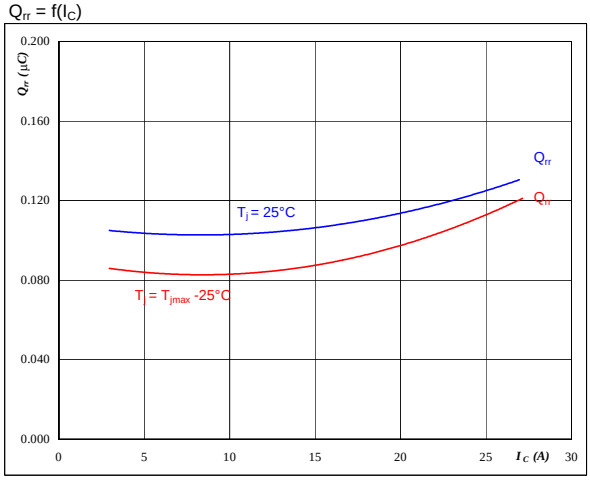

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 14 PFC FRED

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$Q_{rr} = f(R_{gon})$

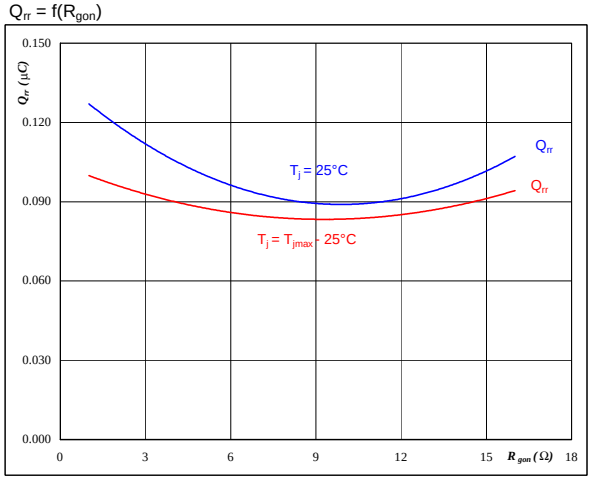

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

Figure 15 PFC FRED

Typical reverse recovery current as a function of collector current

$I_{RRM} = f(I_C)$

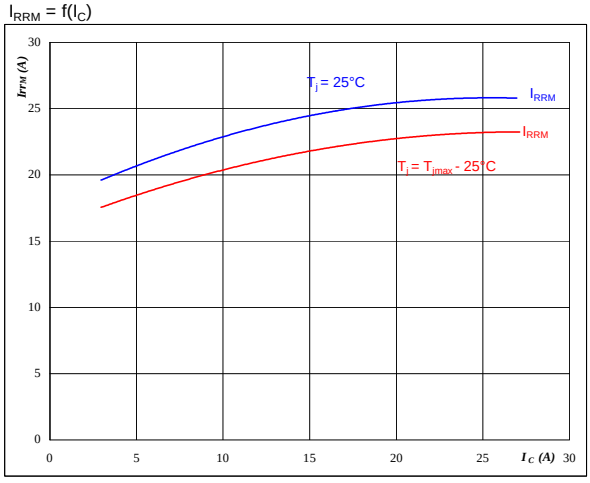

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 16 PFC FRED

Typical reverse recovery current as a function of IGBT turn on gate resistor

$I_{RRM} = f(R_{gon})$

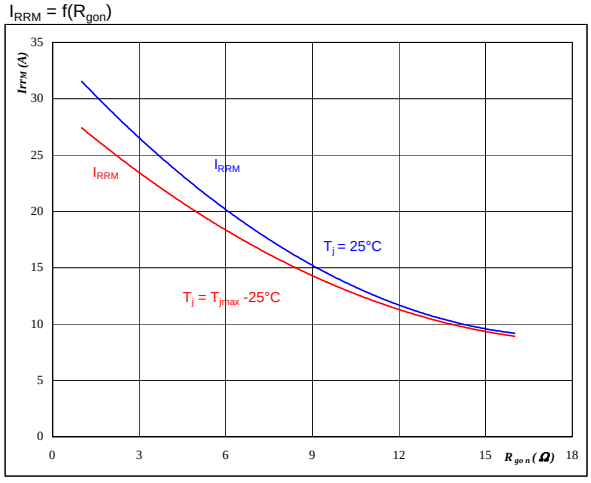

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

PFC

Figure 17 PFC FRED

Typical rate of fall of forward and reverse recovery current as a function of collector current

$dI_0/dt, dI_{rec}/dt = f(Ic)$

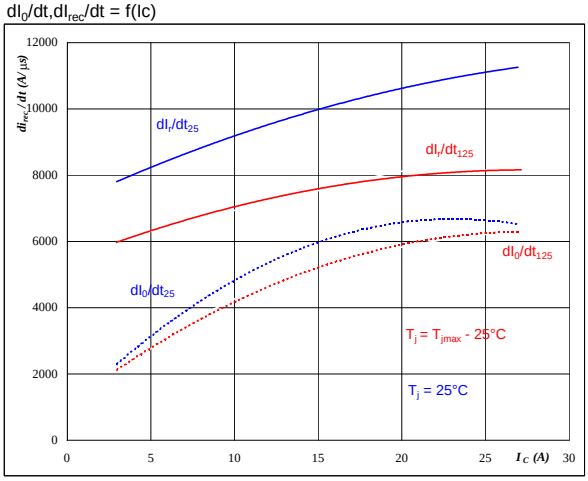

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 18 PFC FRED

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$dI_0/dt, dI_{rec}/dt = f(R_{gon})$

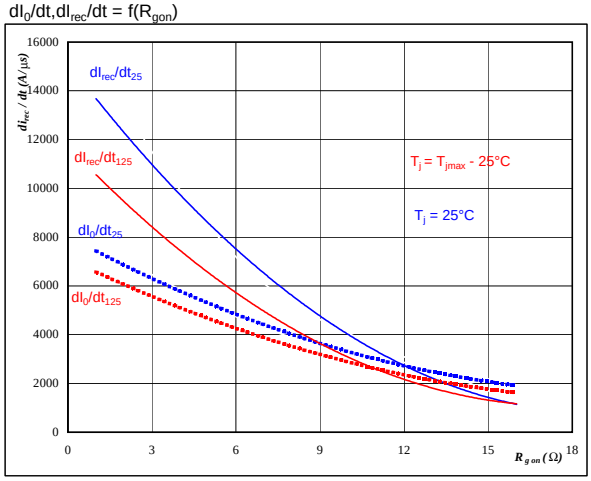

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

Figure 19 PFC MOSFET

IGBT/MOSFET transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

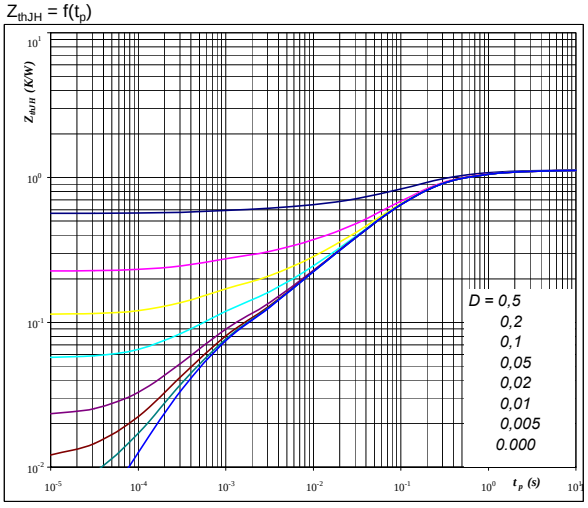

D =	t_p / T	
R_{thJH} =	1.13	K/W

IGBT thermal model values

R (C/W)	Tau (s)
0.026	8.47E+00
0.127	1.17E+00
0.544	1.77E-01
0.266	4.73E-02
0.107	7.23E-03
0.062	5.51E-04

Figure 20 PFC FRED

FRED transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

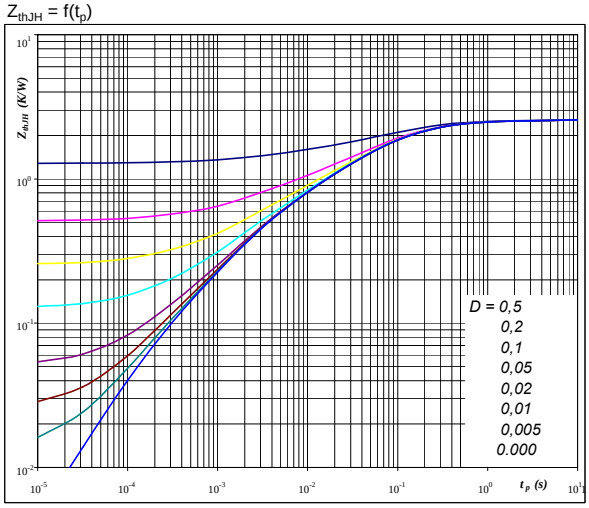

D =	t_p / T	
R_{thJH} =	2.56	K/W

FRED thermal model values

R (C/W)	Tau (s)
0.12	2.23E+00
0.49	2.82E-01
1.11	6.57E-02
0.49	1.17E-02
0.30	2.09E-03
0.05	2.12E-04

Copyright by Vincotech

PFC

Figure 21 PFC MOSFET

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

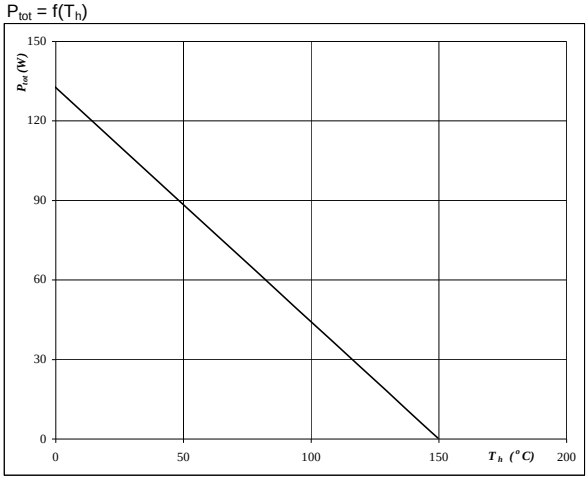

T_j = 150 ºC

Figure 22 PFC MOSFET

Collector/Drain current as a function of heatsink temperature

$I_C = f(T_h)$

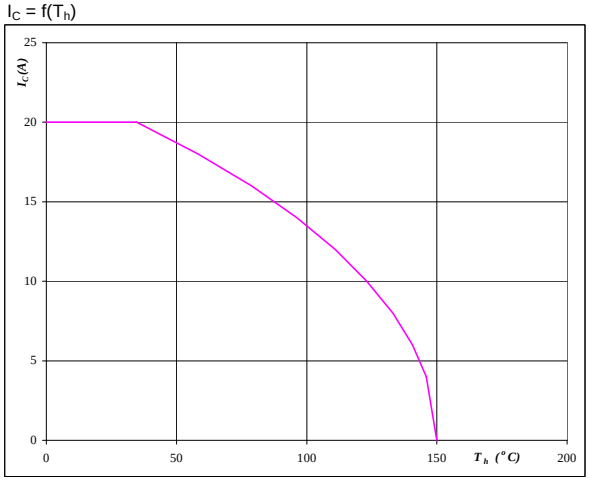

T_j = 150 ºC
V_{GS} = 10 V

Figure 23 PFC FRED

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

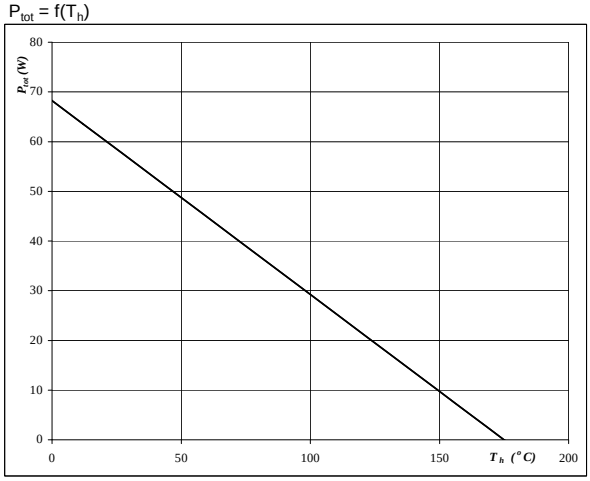

T_j = 175 ºC

Figure 24 PFC FRED

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

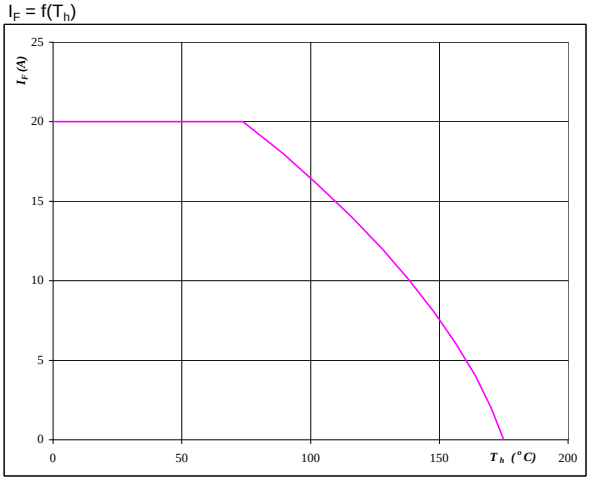

T_j = 175 ºC

PFC

Figure 25 PFC MOSFET

Safe operating area as a function of drain-source voltage

$I_D = f(V_{DS})$

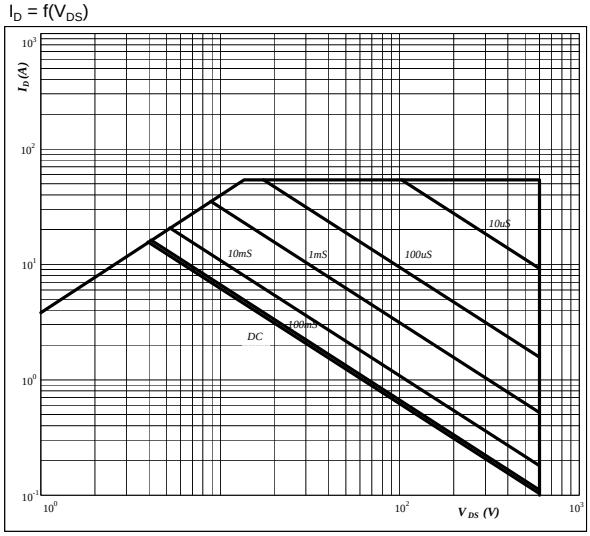

D =	single pulse	
T_h =	80	ºC
V_{GS} =	10	V
T_j =	T_{jmax}	ºC

Figure 26 PFC MOSFET

Gate voltage vs Gate charge

$V_{GS} = f(Qg)$

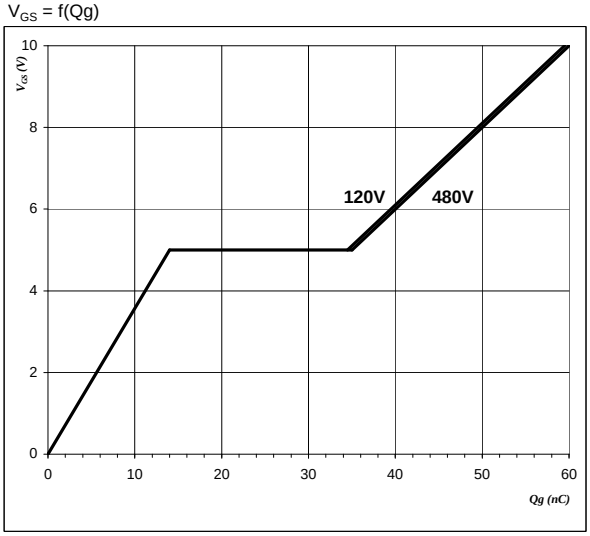

I_D = 15 A

Input Rectifier Bridge

Figure 1 Rectifier diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

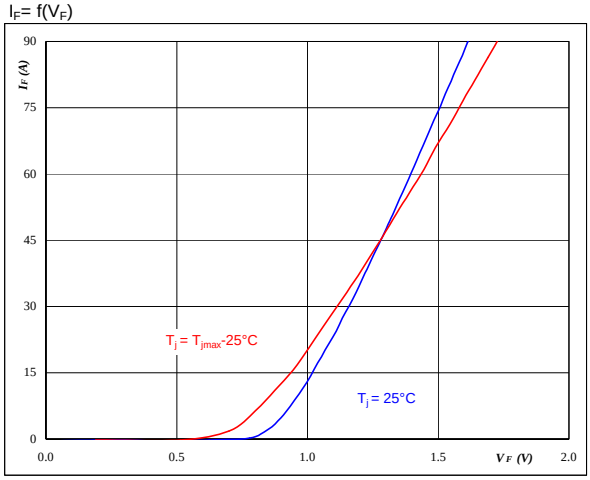

t_p = 250 µs

Figure 2 Rectifier diode

Diode transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

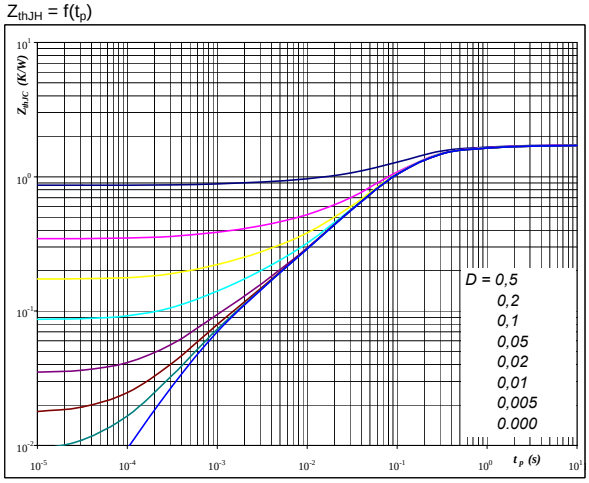

D = t_p / T

R_{thJH} = 1.728 K/W

Figure 3 Rectifier diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

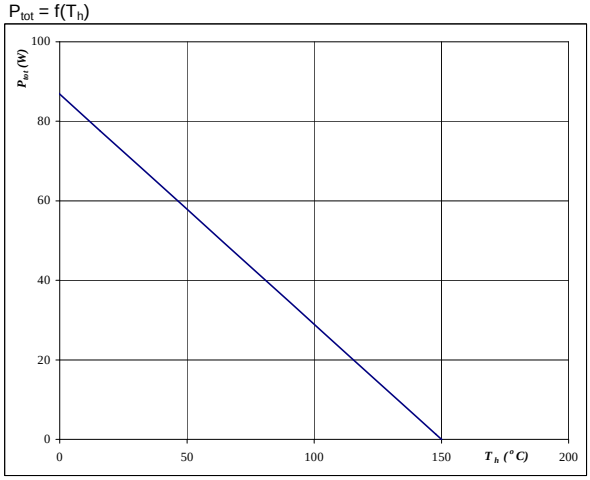

T_j = 150 ºC

Figure 4 Rectifier diode

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

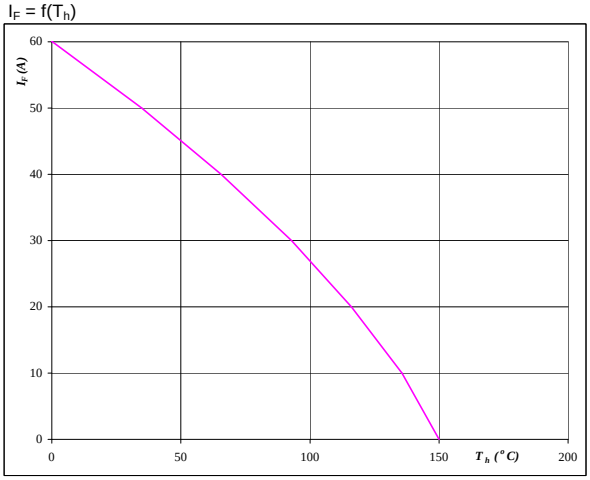

T_j = 150 ºC

Copyright by Vincotech

Thyristor

Figure 1 Thyristor

Typical thyristor forward current as a function of forward voltage

$I_F = f(V_F)$

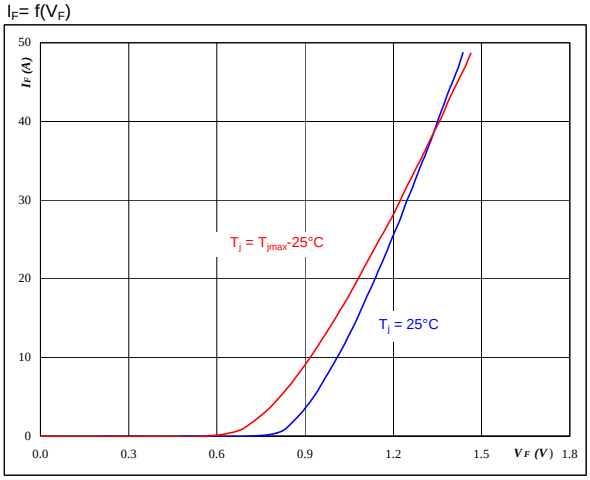

t_p = 250 µs

Figure 2 Thyristor

Thyristor transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

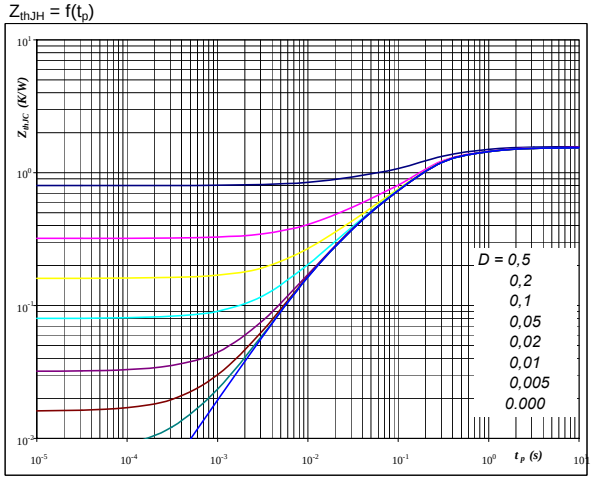

D = t_p / T

R_{thJH} = 1.57 K/W

Figure 3 Thyristor

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

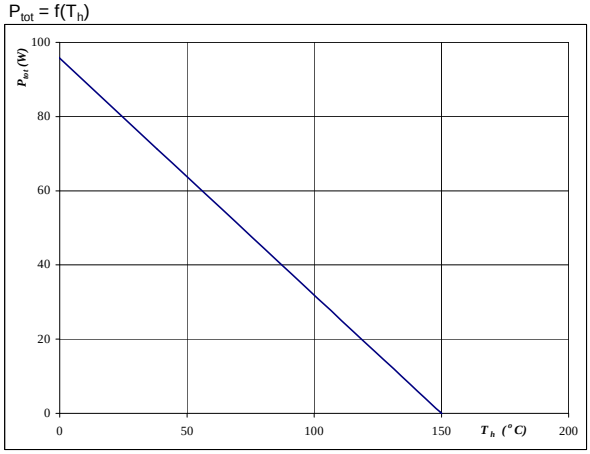

T_j = 150 ºC

Figure 4 Thyristor

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

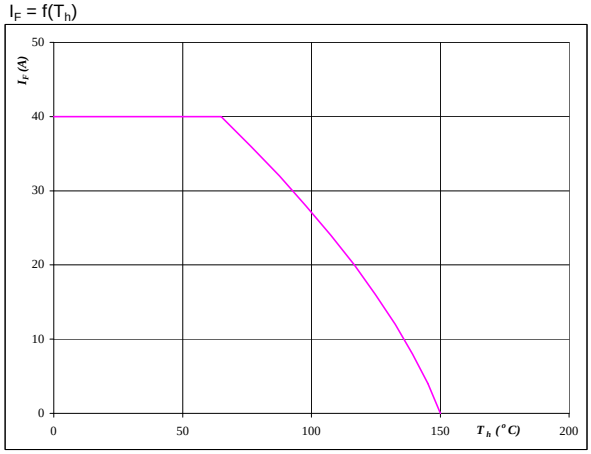

T_j = 150 ºC

Thyristor

Figure 5 Thyristor

Gate trigger characteristics

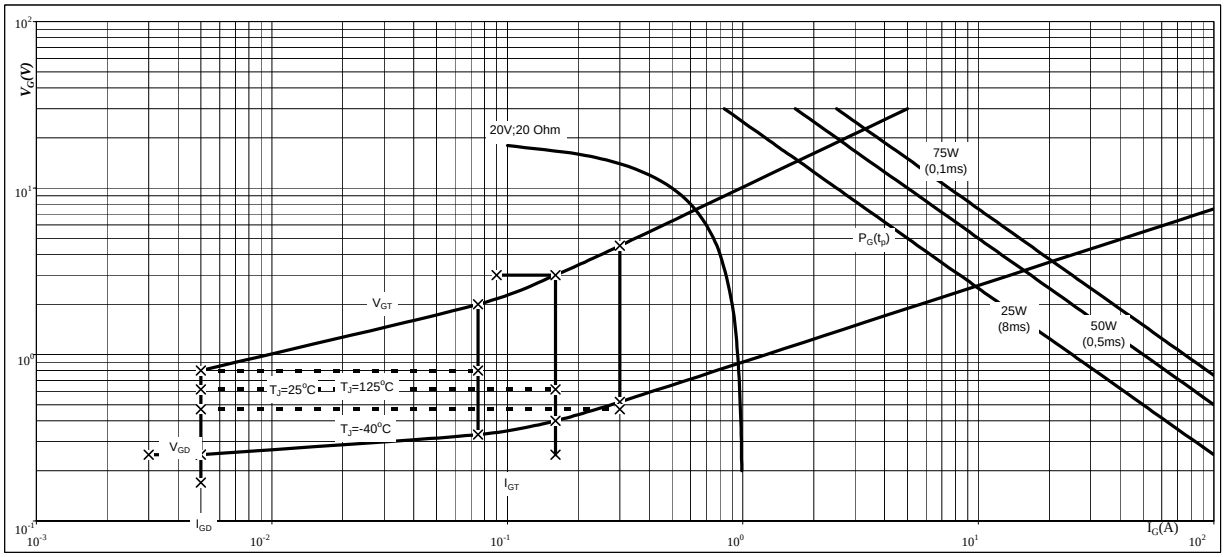

Thermistor

Figure 1 Thermistor

Typical NTC characteristic
as a function of temperature

$R_T = f(T)$

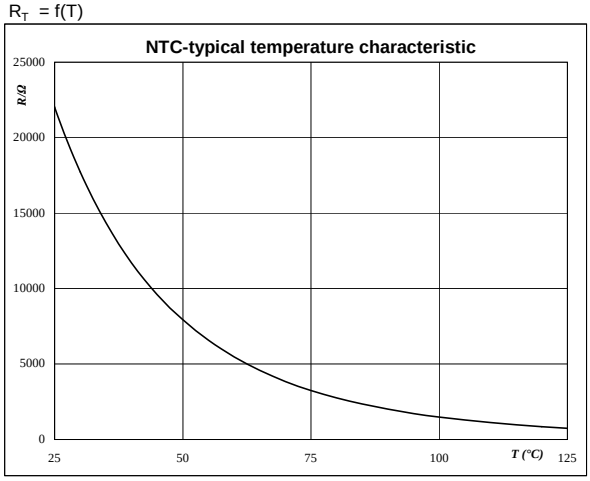

Switching Definitions PFC

General conditions

T_j	=	125 °C
R_{gon}	=	4 Ω
R_{goff}	=	4 Ω

Figure 1 PFC MOSFET

Turn-off Switching Waveforms & definition of t_{doff}, t_{Eoff}
(t_{Eoff} = integrating time for E_{off})

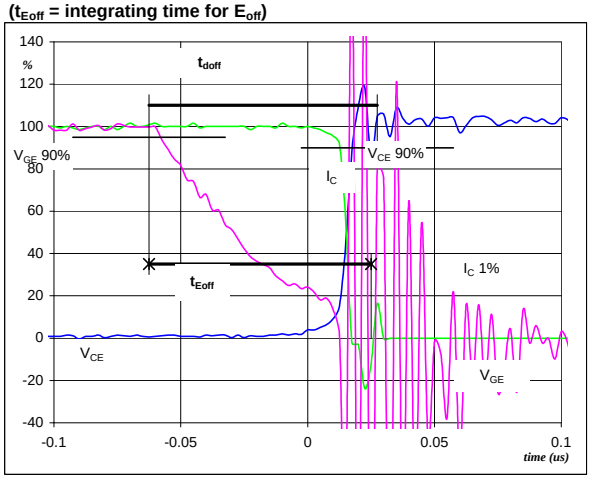

V_{GE} (0%) =	0	V
V_{GE} (100%) =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
t_{doff} =	0.07	µs
t_{Eoff} =	0.09	µs

Figure 2 PFC MOSFET

Turn-on Switching Waveforms & definition of t_{don}, t_{Eon}
(t_{Eon} = integrating time for E_{on})

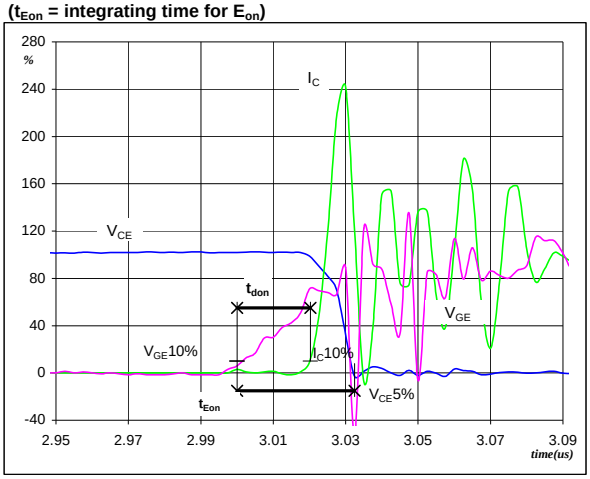

V_{GE} (0%) =	0	V
V_{GE} (100%) =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
t_{don} =	0.02	µs
t_{Eon} =	0.03	µs

Figure 3 PFC MOSFET

Turn-off Switching Waveforms & definition of t_f

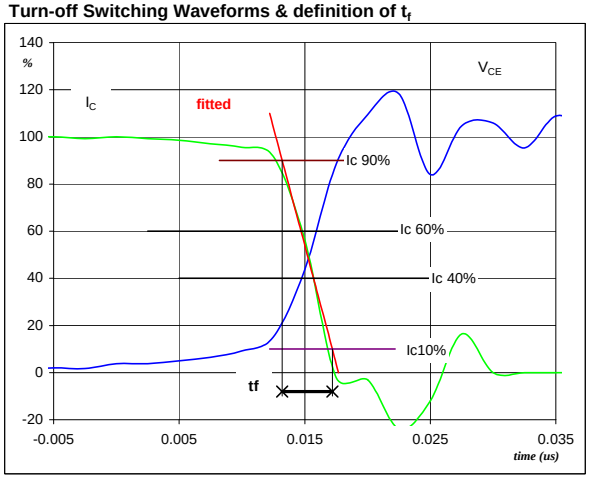

V_C (100%) =	400	V
I_C (100%) =	15	A
t_f =	0.003	µs

Figure 4 PFC MOSFET

Turn-on Switching Waveforms & definition of t_r

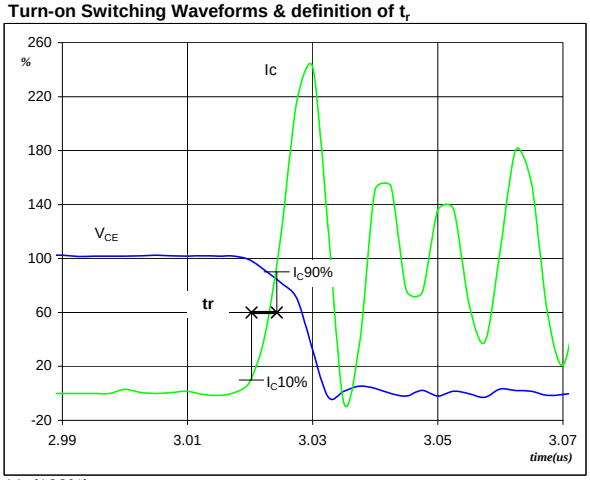

V_C (100%) =	400	V
I_C (100%) =	15	A
t_r =	0.004	µs

Copyright by Vincotech

Switching Definitions PFC

Figure 5 PFC MOSFET

Turn-off Switching Waveforms & definition of t_{Eoff}

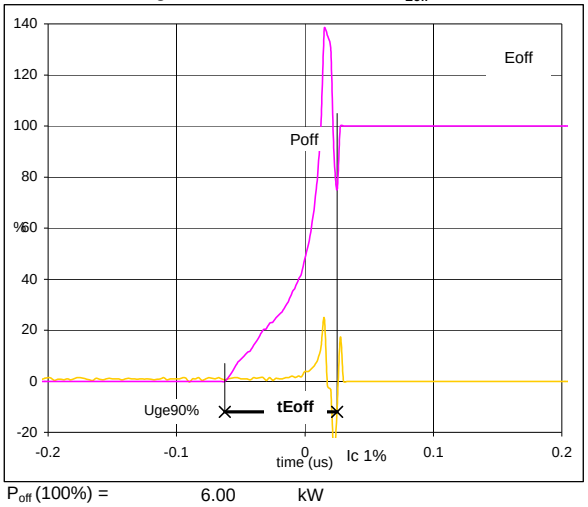

P_{off} (100%) =	6.00	kW
E_{off} (100%) =	0.01	mJ
t_{Eoff} =	0.09	µs

Figure 6 PFC MOSFET

Turn-on Switching Waveforms & definition of t_{Eon}

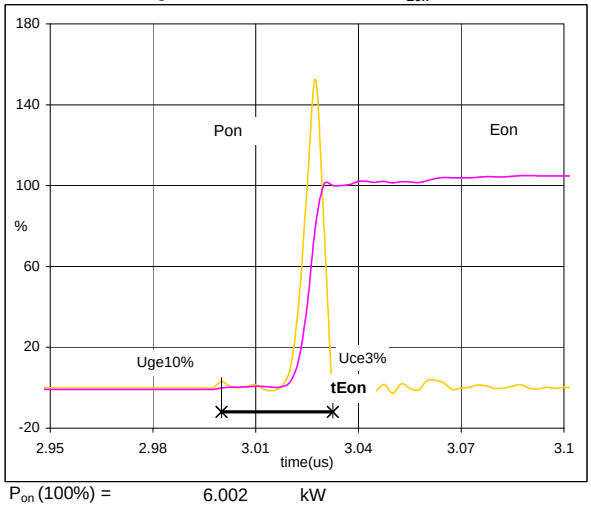

P_{on} (100%) =	6.002	kW
E_{on} (100%) =	0.06	mJ
t_{Eon} =	0.0325	µs

Figure 7 PFC MOSFET

Gate voltage vs Gate charge (measured)

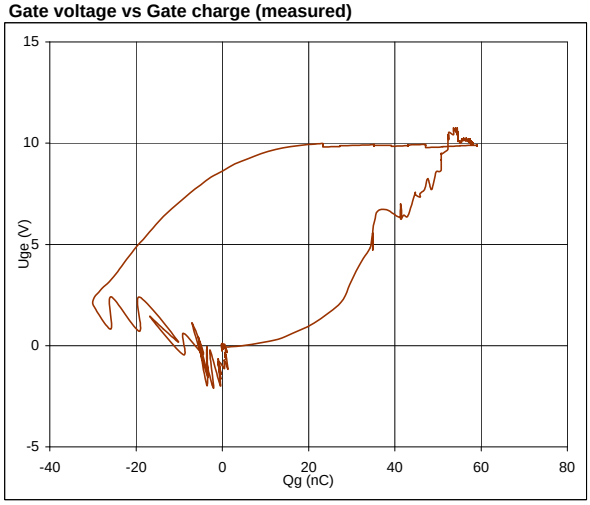

V_{GEoff} =	0	V
V_{GEon} =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
Q_g =	59.01	nC

Figure 8 PFC FRED

Turn-off Switching Waveforms & definition of t_{rr}

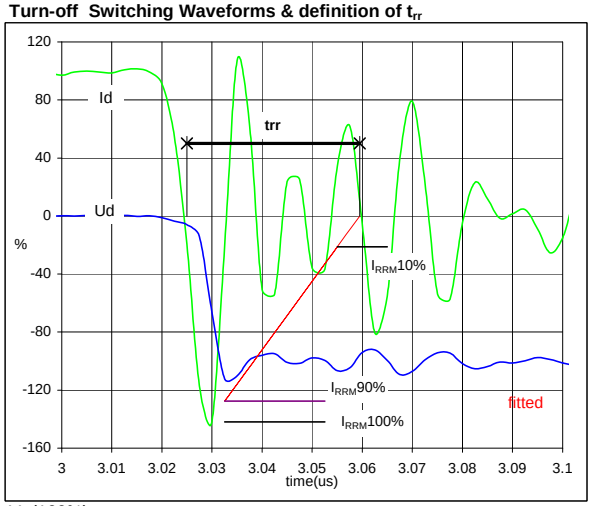

V_d (100%) =	400	V
I_d (100%) =	15	A
I_{RRM} (100%) =	-22	A
t_{rr} =	0.01	µs

Copyright by Vincotech

Switching Definitions PFC

Figure 9 PFC FRED

Turn-on Switching Waveforms & definition of t_{Qrr}
(t_{Qrr}= integrating time for Q_{rr})

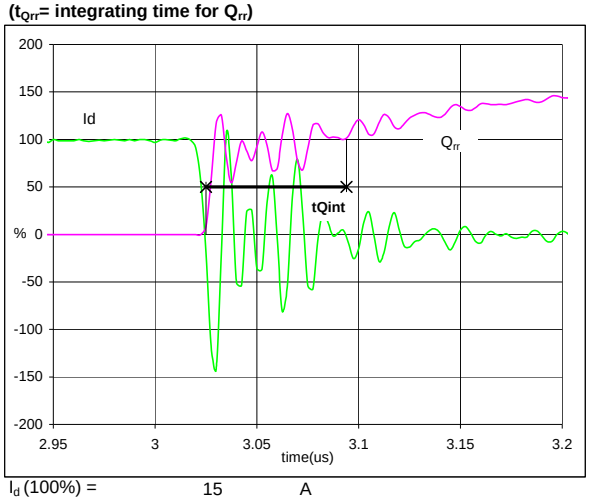

I_d (100%) =	15	A
Q_{rr} (100%) =	0.09	µC
t_{Qint} =	0.07	µs

Figure 10 PFC FRED

Turn-on Switching Waveforms & definition of t_{Erec}
(t_{Erec}= integrating time for E_{rec})

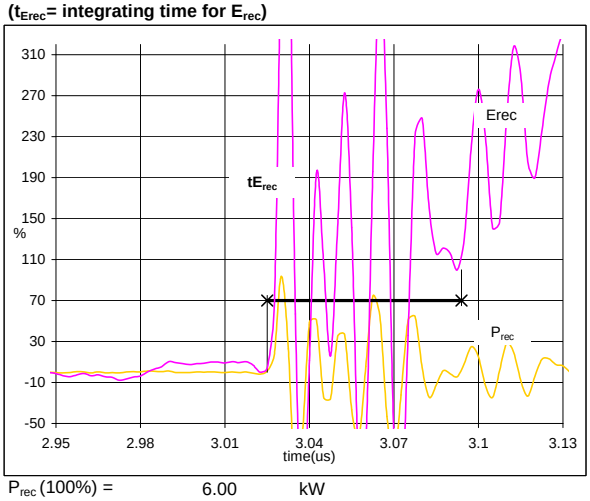

P_{rec} (100%) =	6.00	kW
E_{rec} (100%) =	0.02	mJ
t_{Erec} =	0.07	µs

Ordering Code and Marking - Outline - Pinout

Ordering Code & Marking

Version	Ordering Code	in DataMatrix as	in packaging barcode as
without SCR, current sense in collector	10-FZ062TA099FH-P980D18	P980D18	P980D18
with SCR, current sense in collector	10-FZ062TA099FH01-P980D28	P980D28	P980D28

Outline

Pin table		
Pin	X	Y
1	33,5	0
2	33,5	2,8
3	29,5	2,8
4	29,5	0
5	26,7	0
6	23,9	0
7	21,05	0
8	14,85	0
9	14,05	13,35
10	12,05	0
11	9,5	12,05
12	8,2	0
13	6,7	12,05
14	3,9	0
15	2,2	13,35
16	1,1	0
17	0	22,7
18	7,1	22,7
19	7,1	20,2
20	14,2	22,7
21	20,7	22,7
22	23,5	22,7
23	26	22,7
24	28,8	22,7
25	33,5	18,55
26	33,5	16,05
27	33,5	8,7
28	31	8,7

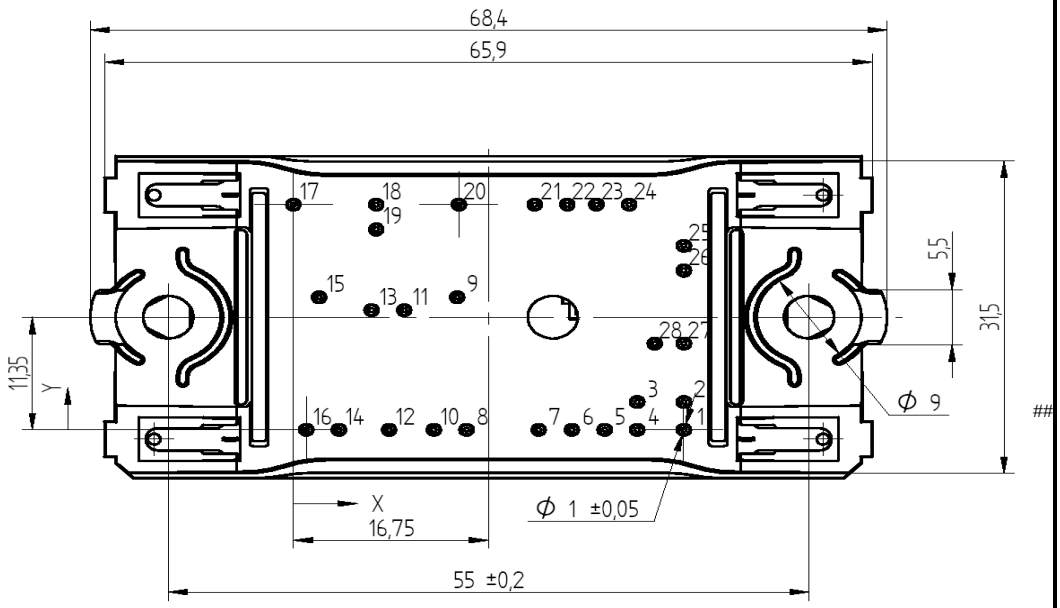

Pinout

Rectifier(FZ062TA099FH)



Rectifier(FZ062TA099FH01)



Pin nr. 21 & 24 without electrical connection

Boost stage(FZ062TA099FH & FH01)

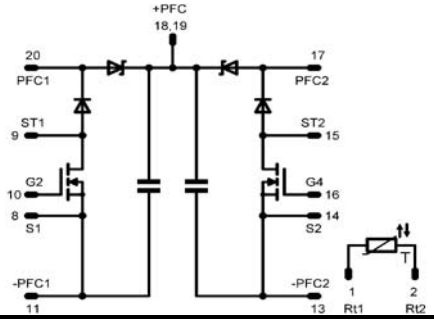

Pin nr. 7 & 12 without electrical connection

PRODUCT STATUS DEFINITIONS

Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data may be published at a later date. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.
Final	Full Production	This datasheet contains final specifications. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech.Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.