flowSOL 0 BI **600V/35A**

Features
- High efficiency
- Ultra fast switching frequency
- Low inductive design
- SiC in boost and H bridge

flow0 housing


Target Applications
- Transformerless solar inverters

Schematic
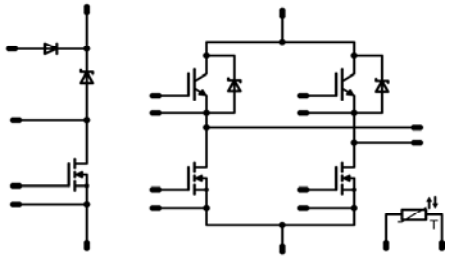

Types
- FZ06BIA045FH

Maximum Ratings

Tj=25°C, unless otherwise specified

Parameter	Symbol	Condition		Value	Unit
Bypass FWD					
Repetitive peak reverse voltage	V_{RRM}			600	V
Forward current per FWD	I_{FAV}	DC current	T_h=80°C T_c=80°C	36 49	A
Surge forward current	I_{FSM}	t_p=10ms	T_j=25°C	370	A
I2t-value	I^2t			360	A^2s
Power dissipation per FWD	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	42 63	W
Maximum Junction Temperature	$T_j$max			150	°C
Input Boost MOSFET					
Drain to source breakdown voltage	V_{DS}			600	V
DC drain current	I_D	T_j=$T_j$max	T_h=80°C T_c=80°C	30 37	A
Pulsed drain current	I_{Dpulse}	t_p limited by $T_j$max		230	A
Power dissipation	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	92 139	W
Gate-source peak voltage	V_{GS}			±20	V
Maximum Junction Temperature	$T_j$max			150	°C

Maximum Ratings

Tj=25°C, unless otherwise specified

Parameter	Symbol	Condition		Value	Unit
Input Boost FWD					
Peak Repetitive Reverse Voltage	V_{RRM}	T_j=25°C		600	V
DC forward current	I_F	T_j=$T_j$max	T_h=80°C T_c=80°C	19 23	A
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j$max		70	A
Power dissipation	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	41 62	W
Maximum Junction Temperature	$T_j$max			175	°C
Buck FWD					
Peak Repetitive Reverse Voltage	V_{RRM}	T_j=25°C		600	V
DC forward current	I_F	T_j=$T_j$max	T_h=80°C T_c=80°C	10 15	A
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j$max	T_c=100°C	35	A
Power dissipation per FWD	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	29 44	W
Maximum Junction Temperature	$T_j$max			175	°C
Buck MOSFET					
Drain to source breakdown voltage	V_{DS}			600	V
DC drain current	I_D	T_j=$T_j$max	T_h=80°C T_c=80°C	30 37	A
Pulsed drain current	I_{Dpulse}	t_p limited by $T_j$max	Tc=25°C	230	A
Power dissipation	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	94 142	W
Gate-source peak voltage	Vgs			±20	V
Maximum Junction Temperature	$T_j$max			150	°C
Boost IGBT					
Collector-emitter break down voltage	V_{CE}			600	V
DC collector current	I_C	T_j=$T_j$max	T_h=80°C T_c=80°C	40 40	A
Repetitive peak collector current	I_{Cpuls}	t_p limited by $T_j$max		150	A
Power dissipation per IGBT	P_{tot}	T_j=$T_j$max	T_h=80°C T_c=80°C	86 131	W
Gate-emitter peak voltage	V_{GE}			±20	V
Short circuit ratings	t_{SC} V_{CC}	T_j≤150°C V_{GE}=15V		6 360	µs V
Maximum Junction Temperature	$T_j$max			175	°C

Maximum Ratings

Tj=25°C, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Thermal Properties				
Storage temperature	T_{stg}		-40…+125	°C
Operation temperature under switching condition	T_{op}		-40…+(Tjmax - 25)	°C
Insulation Properties				
Insulation voltage	V_{is}	t=2s DC voltage	4000	V
Creepage distance			min 12,7	mm
Clearance			min 12,7	mm

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max	
Bypass FWD										
Forward voltage	solar inverte				15	Tj=25°C Tj=125°C	0,7	1,01 0,93	1,3	V
Threshold voltage (for power loss calc. only)	V_{to}					Tj=25°C Tj=125°C		0,86 0,75		V
Slope resistance (for power loss calc. only)	r_t					Tj=25°C Tj=125°C		0,01 0,01		Ω
Reverse current	I_r			1200		Tj=25°C Tj=125°C			0,05	mA
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						1,68		K/W
Input Boost MOSFET										
Static drain to source ON resistance	$R_{DS(on)}$		10		44	Tj=25°C Tj=125°C		0,04 0,09		Ω
Gate threshold voltage	$V_{(GS)th}$	VGS=VDS			0,003	Tj=25°C Tj=125°C	2,1	3	3,9	V
Gate to Source Leakage Current	I_{gss}		20	0		Tj=25°C Tj=125°C			200	nA
Zero Gate Voltage Drain Current	I_{dss}		0	600		Tj=25°C Tj=125°C			25000	nA
Turn On Delay Time	$t_{d(ON)}$	Rgoff=4 Ω Rgon=4 Ω	10	400	15	Tj=25°C Tj=125°C		28 27		ns
Rise Time	t_r					Tj=25°C Tj=125°C		5 6		
Turn off delay time	$t_{d(OFF)}$					Tj=25°C Tj=125°C		154 167		
Fall time	t_f					Tj=25°C Tj=125°C		10 9		
Turn-on energy loss per pulse	E_{on}					Tj=25°C Tj=125°C		0,063 0,072		mWs
Turn-off energy loss per pulse	E_{off}					Tj=25°C Tj=125°C		0,025 0,025		
Total gate charge	Q_g	Rgon=4 Ω	10	400	44	Tj=25°C Tj=125°C		150	190	nC
Gate to source charge	Q_{gs}					Tj=25°C Tj=125°C		34		
Gate to drain charge	Q_{gd}					Tj=25°C Tj=125°C		51		
Input capacitance	C_{iss}	f=1MHz	0	100		Tj=25°C		6800		pF
Output capacitance	C_{oss}							320		
Reverse transfer capacitance	C_{rss}							48		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						0,76		K/W
Input Boost FWD										
Forward voltage	V_F				16	Tj=25°C Tj=150°C	1	1,54 1,71	1,8	V
Reverse leakage current	I_{rm}		10	400	15	Tj=25°C Tj=150°C			400	µA
Peak recovery current	I_{RRM}	Rgon=4 Ω	10	400	15	Tj=25°C Tj=150°C		16,63 14,68		A
Reverse recovery time	t_{rr}					Tj=25°C Tj=150°C		9,3 10,4		ns
Reverse recovery charge	Q_{rr}					Tj=25°C Tj=150°C		0,058 0,064		µC
Reverse recovered energy	E_{rec}					Tj=25°C Tj=150°C		0,005 0,006		mWs
Peak rate of fall of recovery current	di(rec)max /dt					Tj=25°C Tj=150°C		4244 2752		A/µs
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						2,34		K/W

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max	
Buck FWD										
FWD forward voltage	V_F				8	Tj=25°C Tj=150°C	1	1,52 1,64	1,8	V
Peak reverse recovery current	I_{RRM}	Rgon=4 Ω	10	400	15	Tj=25°C Tj=150°C		14 12		A
Reverse recovery time	t_{rr}					Tj=25°C Tj=150°C		7,8 8,8		ns
Reverse recovered charge	Q_{rr}					Tj=25°C Tj=150°C		0,05 0,05		µC
Peak rate of fall of recovery current	di(rec)max /dt					Tj=25°C Tj=150°C		4078 3373		A/µs
Reverse recovered energy	Erec					Tj=25°C Tj=150°C		0,008 0,007		mWs
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						3,28		K/W
Buck MOSFET										
Static drain to source ON resistance	$R_{ds(on)}$		10		44	Tj=25°C Tj=125°C		45 89		mΩ
Gate threshold voltage	$V_{(GS)th}$			V_{DS}=V_{GS}	0,003	Tj=25°C Tj=125°C	2,1	3	3,9	V
Gate to Source Leakage Current	I_{gss}		20	0		Tj=25°C Tj=125°C			200	nA
Zero Gate Voltage Drain Current	I_{dss}		0	600		Tj=25°C Tj=125°C			25000	nA
Turn On Delay Time	$t_{d(ON)}$	Rgoff=4 Ω Rgon=4 Ω	10	400	15	Tj=25°C Tj=125°C		31 30		ns
Rise Time	t_r					Tj=25°C Tj=125°C		5,4 6		
Turn off delay time	$t_{d(OFF)}$					Tj=25°C Tj=125°C		147 158		
Fall time	t_f					Tj=25°C Tj=125°C		13,7 10,3		
Turn-on energy loss per pulse	E_{on}					Tj=25°C Tj=125°C		0,063 0,067		mWs
Turn-off energy loss per pulse	E_{off}					Tj=25°C Tj=125°C		0,021 0,028		
Total gate charge	Q_g		10	400	44	Tj=25°C		150	190	nC
Gate to source charge	Q_{gs}							34		
Gate to drain charge	Q_{gd}							51		
Input capacitance	C_{iss}	f=1MHz	0	100		Tj=25°C		6800		pF
Output capacitance	C_{oss}							320		
Reverse transfer capacitance	C_{rss}							48		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						0,75		K/W

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max	
Boost IGBT										
Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=V_{GE}$			0,0008	Tj=25°C Tj=150°C	5	5,8	6,5	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		50	Tj=25°C Tj=150°C		1,18 1,21		V
Collector-emitter cut-off incl FWD	I_{CES}		0	600		Tj=25°C Tj=150°C			0,2	mA
Gate-emitter leakage current	I_{GES}		20	0		Tj=25°C Tj=150°C			650	nA
Integrated Gate resistor	R_{gint}							none		Ω
Input capacitance	C_{ies}	f=1MHz	0	25		Tj=25°C		3140		pF
Output capacitance	C_{oss}							200		
Reverse transfer capacitance	C_{rss}							93		
Gate charge	Q_{Gate}		15	480	50	Tj=25°C		310		nC
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um λ = 1 W/mK						1,10		K/W
Note: For the **Boost IGBT** only LF switching allowed										
Thermistor										
Rated resistance*	R_{25}					Tj=25°C	17,5	22	29,0	kΩ
	R_{100}	Tol. ±5%						1486		Ω
Power dissipation	P					Tj=25°C		210		mW
B-value	$B_{(25/100)}$	Tol. ±3%				Tj=25°C		4000		K

* see details on **Thermistor** charts on **Figure 2.**

Buck

Figure 1 MOSFET

Typical output characteristics

$I_C = f(V_{CE})$

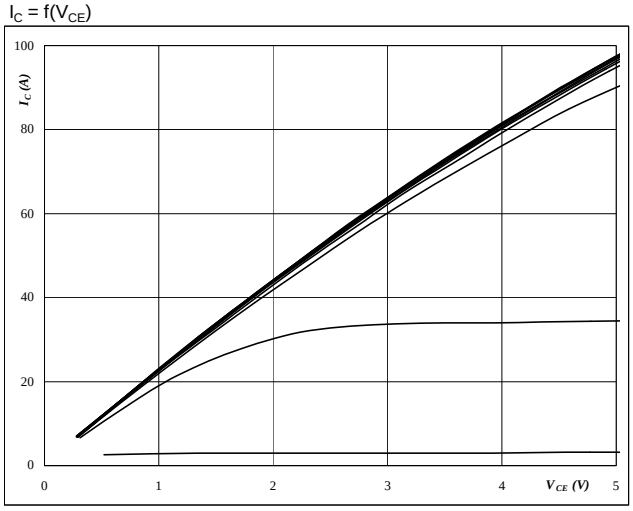

At

t_p =	250	µs
T_j =	25	°C
V_{GE} from	4 V to 14 V in steps of 1 V	

Figure 2 MOSFET

Typical output characteristics

$I_C = f(V_{CE})$

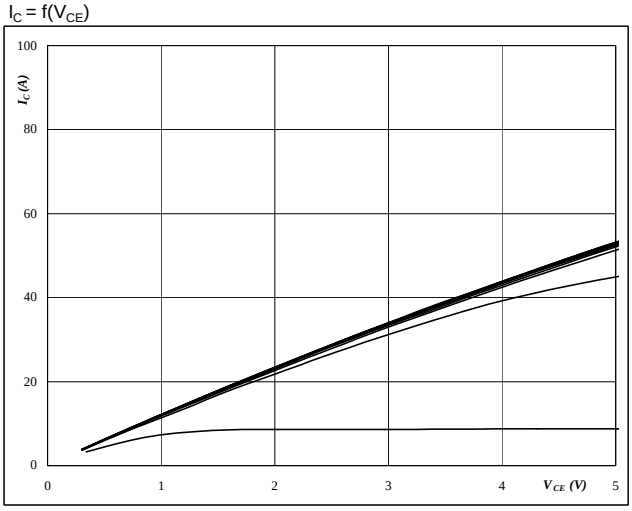

At

t_p =	250	µs
T_j =	125	°C
V_{GE} from	4 V to 14 V in steps of 1 V	

Figure 3 MOSFET

Typical transfer characteristics

$I_C = f(V_{GE})$

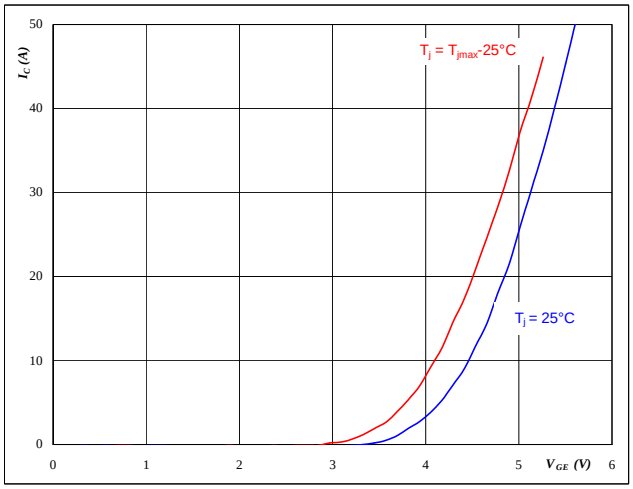

At

t_p =	250	µs
V_{CE} =	10	V

Figure 4 FRED

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

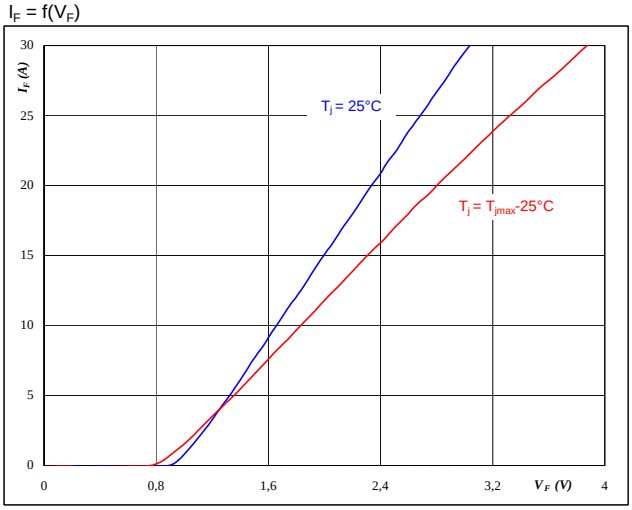

At

t_p =	250	µs

Buck

Figure 5 MOSFET

Typical switching energy losses
as a function of collector current
$E = f(I_C)$

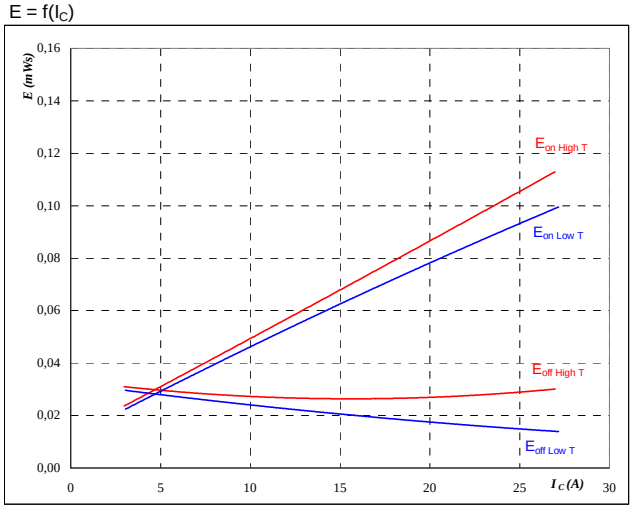

With an inductive load at

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 6 MOSFET

Typical switching energy losses
as a function of gate resistor
$E = f(R_G)$

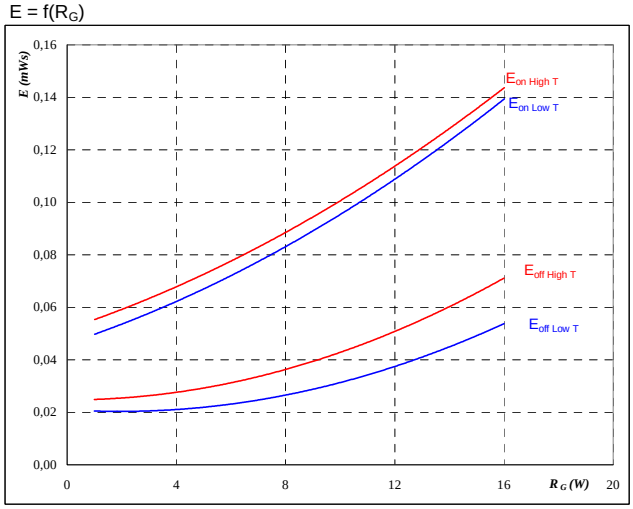

With an inductive load at

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
I_C =	15	A

Figure 7 FRED

Typical reverse recovery energy loss
as a function of collector current
$E_{rec} = f(I_c)$

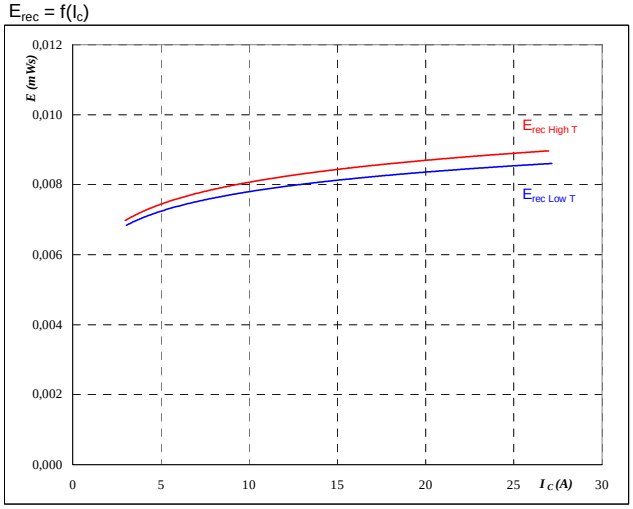

With an inductive load at

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 8 FRED

Typical reverse recovery energy loss
as a function of gate resistor
$E_{rec} = f(R_G)$

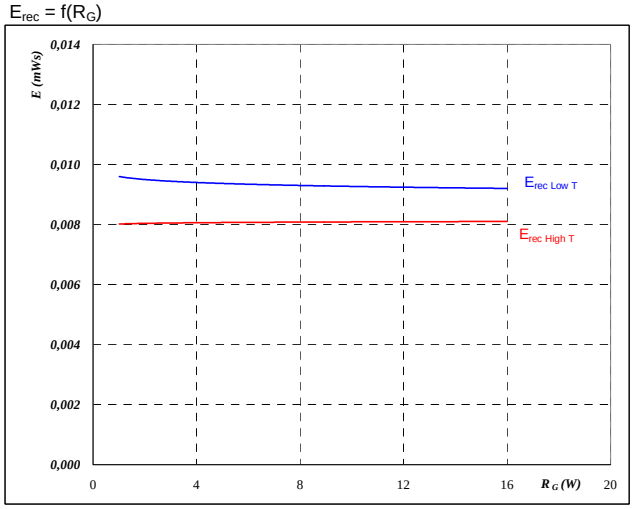

With an inductive load at

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
I_C =	15	A

Buck

Figure 9 MOSFET

Typical switching times as a function of collector current

t = f(I_C)

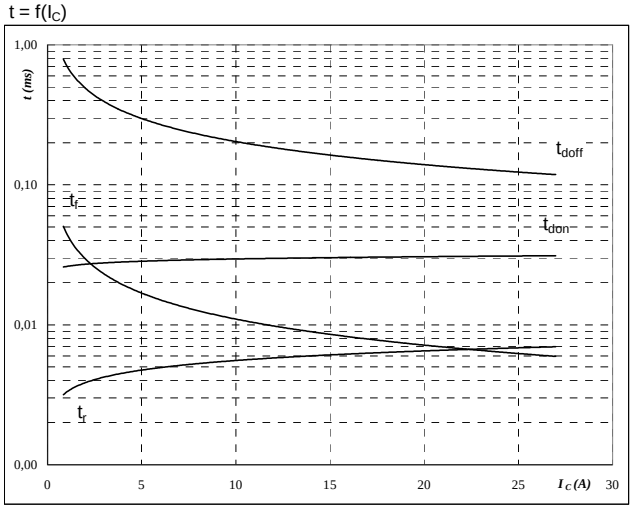

With an inductive load at

T_j =	125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 10 MOSFET

Typical switching times as a function of gate resistor

t = f(R_G)

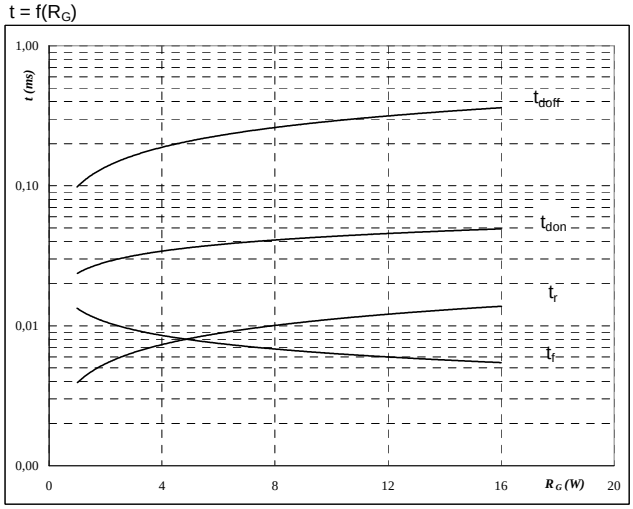

With an inductive load at

T_j =	125	°C
V_{CE} =	400	V
V_{GE} =	10	V
I_C =	15	A

Figure 11 FRED

Typical reverse recovery time as a function of collector current

t_{rr} = f(Ic)

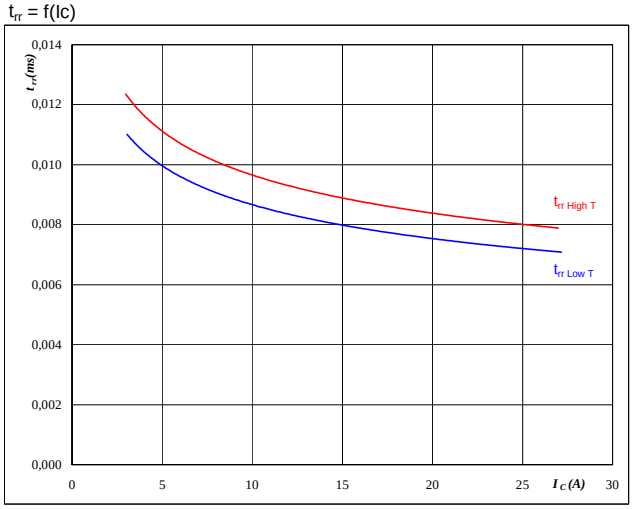

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 12 FRED

Typical reverse recovery time as a function of IGBT turn on gate resistor

t_{rr} = f(R_{gon})

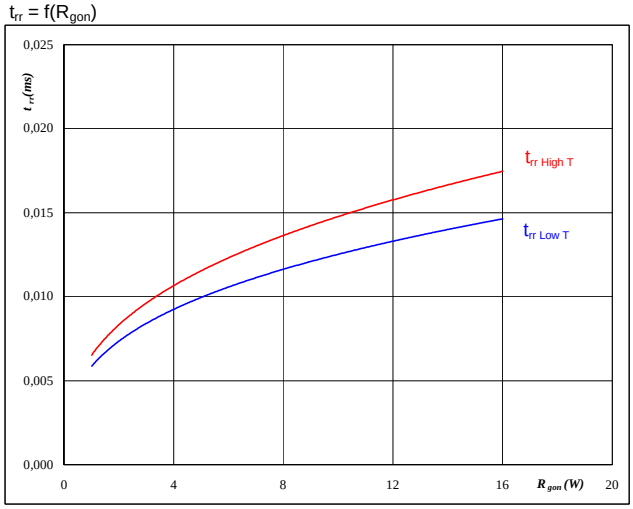

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GE} =	10	V

Buck

Figure 13 FRED

Typical reverse recovery charge as a function of collector current

$Q_{rr} = f(I_C)$

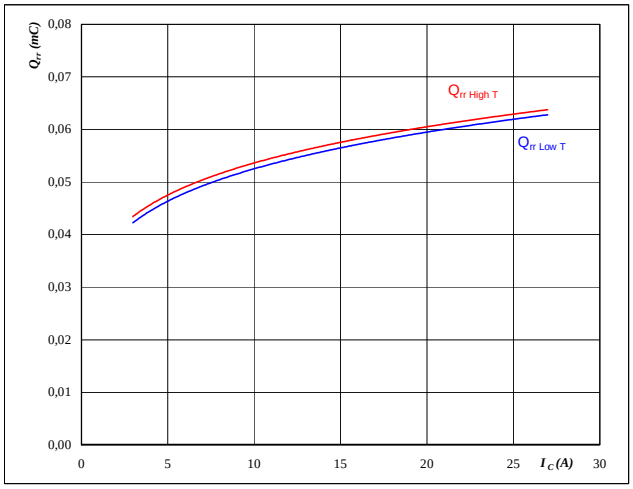

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 14 FRED

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$Q_{rr} = f(R_{gon})$

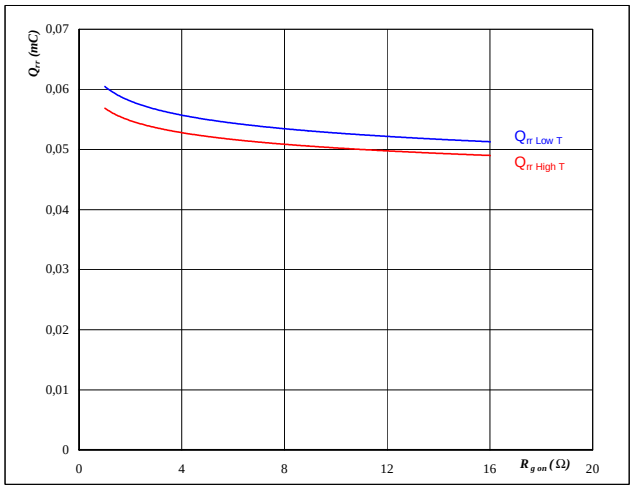

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GE} =	10	V

Figure 15 FRED

Typical reverse recovery current as a function of collector current

$I_{RRM} = f(I_C)$

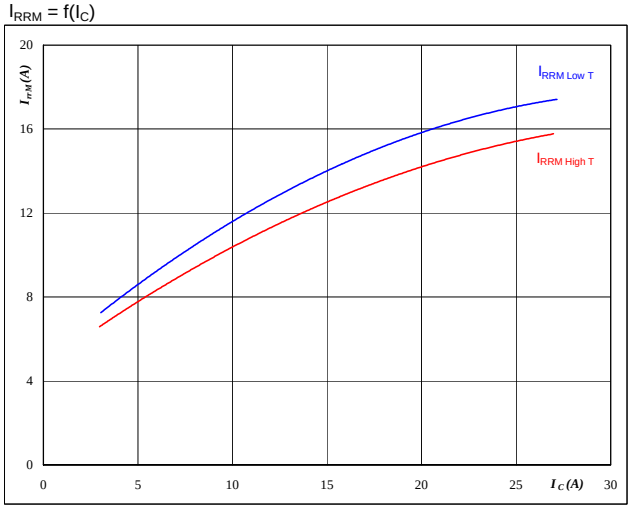

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 16 FRED

Typical reverse recovery current as a function of IGBT turn on gate resistor

$I_{RRM} = f(R_{gon})$

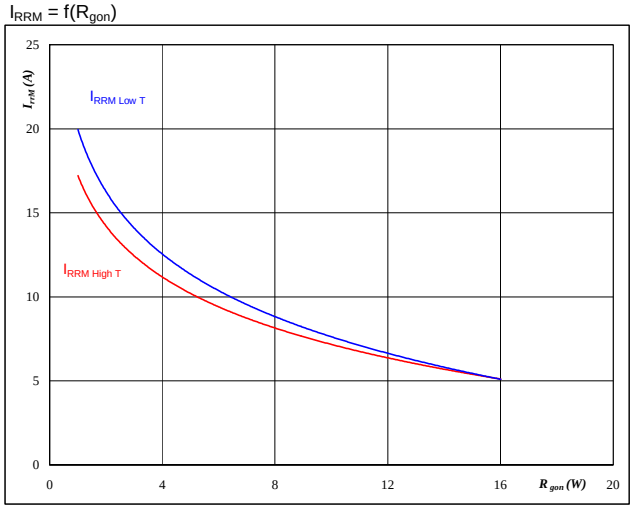

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GE} =	10	V

Buck

Figure 17 FRED

Typical rate of fall of forward and reverse recovery current as a function of collector current

$dI_0/dt, dI_{rec}/dt = f(Ic)$

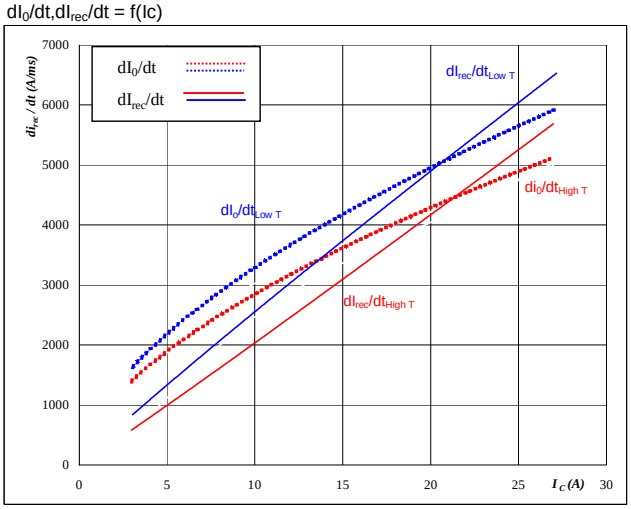

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 18 FRED

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$dI_0/dt, dI_{rec}/dt = f(R_{gon})$

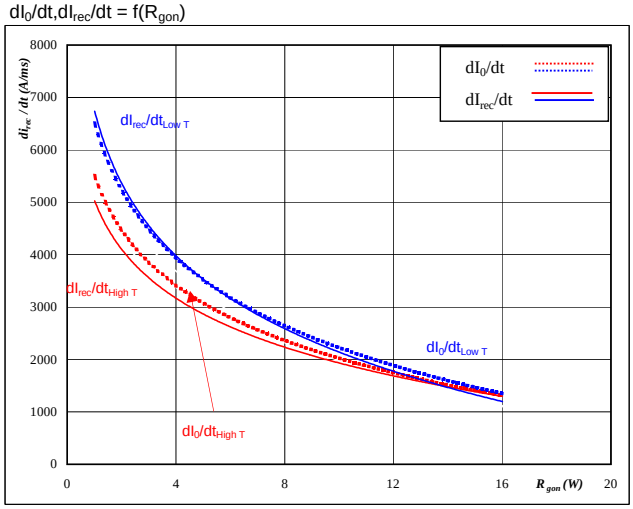

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GE} =	10	V

Figure 19 MOSFET

IGBT transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

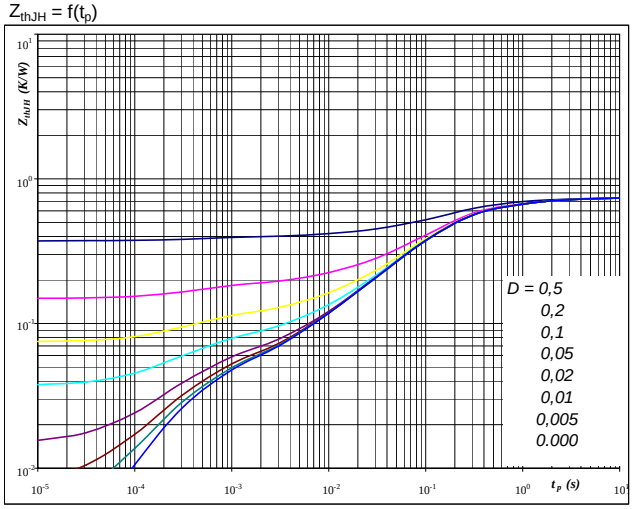

At

D =	t_p / T	
R_{thJH} =	0,75	K/W

IGBT thermal model values

R (C/W)	Tau (s)
0,03	9,3E+00
0,12	1,2E+00
0,41	1,6E-01
0,11	3,8E-02
0,03	5,2E-03
0,04	3,7E-04

Figure 20 FRED

FRED transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

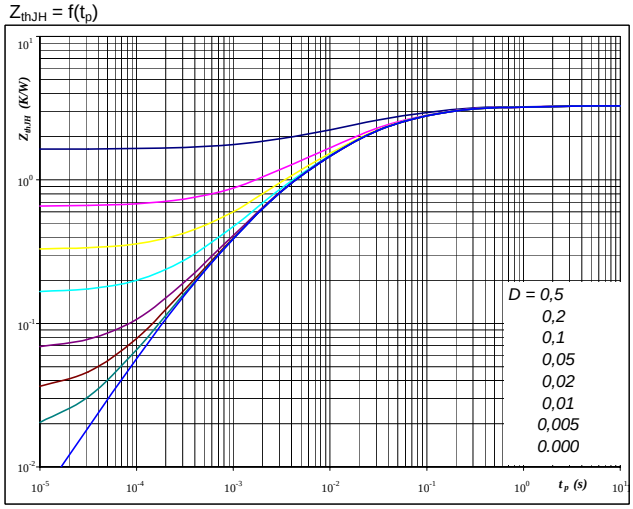

At

D =	t_p / T	
R_{thJH} =	3,28	K/W

FRED thermal model values

R (C/W)	Tau (s)
0,17	9,7E-01
1,04	8,5E-02
1,34	1,6E-02
0,65	2,5E-03
0,08	3,2E-04

Buck

Figure 21 MOSFET

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

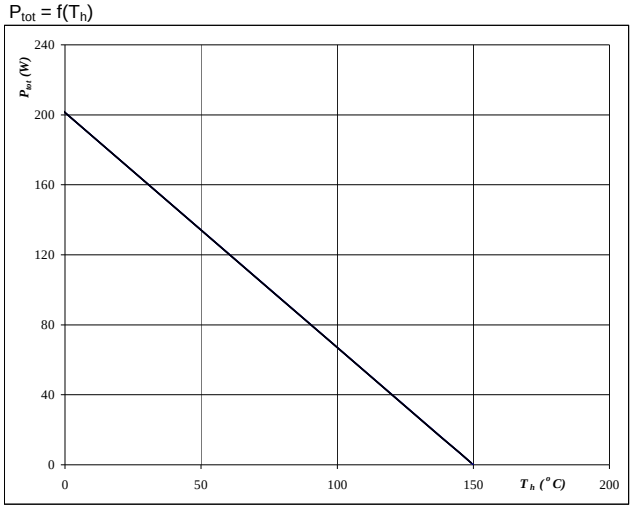

At

T_j = 150 °C

Figure 22 MOSFET

Collector current as a function of heatsink temperature

$I_C = f(T_h)$

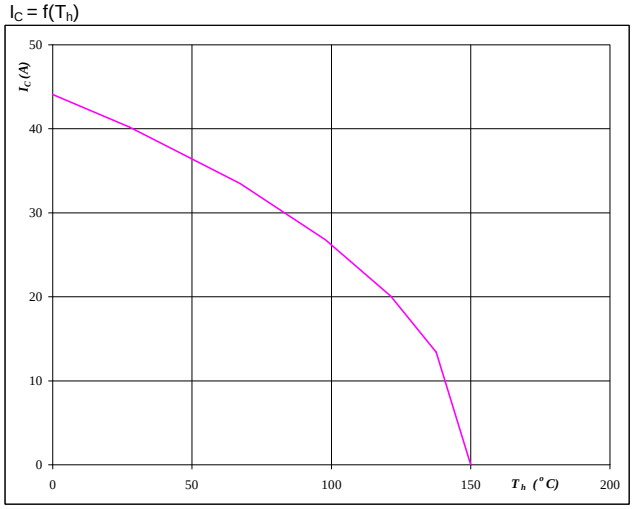

At

T_j = 150 °C

V_{GE} = 15 V

Figure 23 FRED

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

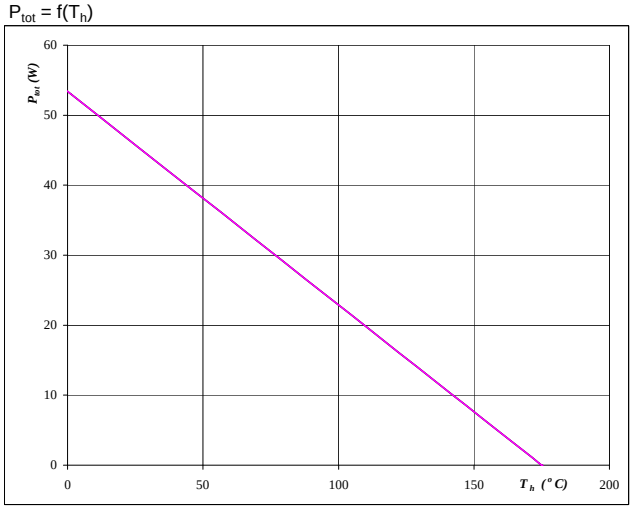

At

T_j = 175 °C

Figure 24 FRED

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

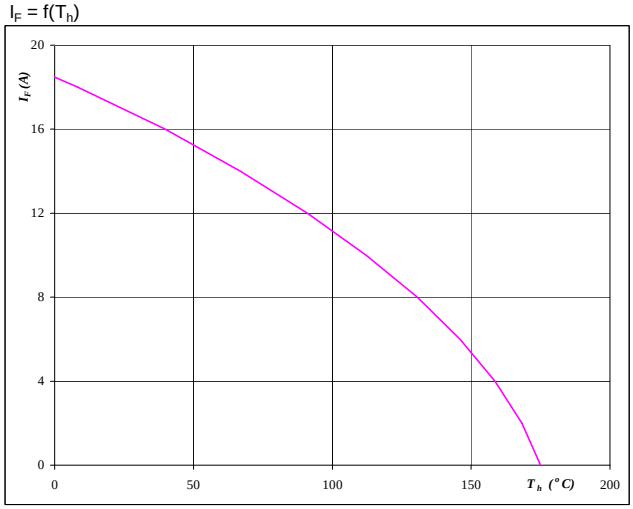

At

T_j = 175 °C

Buck

Figure 25 MOSFET

Safe operating area as a function of collector-emitter voltage

$I_C = f(V_{CE})$

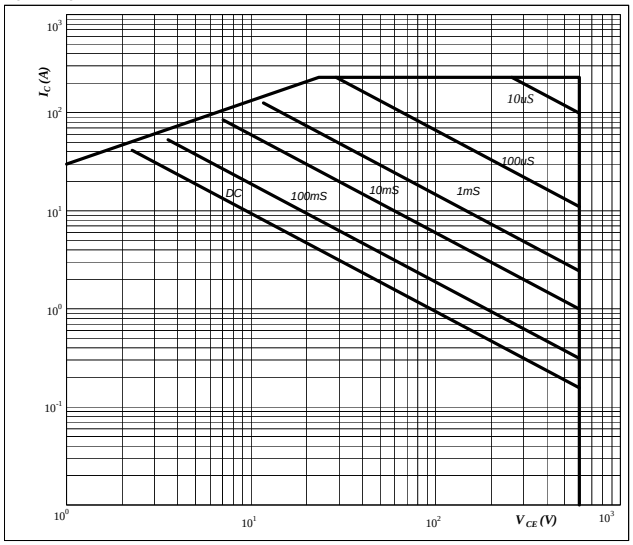

At

D =	single pulse	
Th =	80	ºC
V_{GE} =	15	V
T_j =	T_{jmax}	ºC

Figure 26 MOSFET

Gate voltage vs Gate charge

$V_{GE} = f(Q_g)$

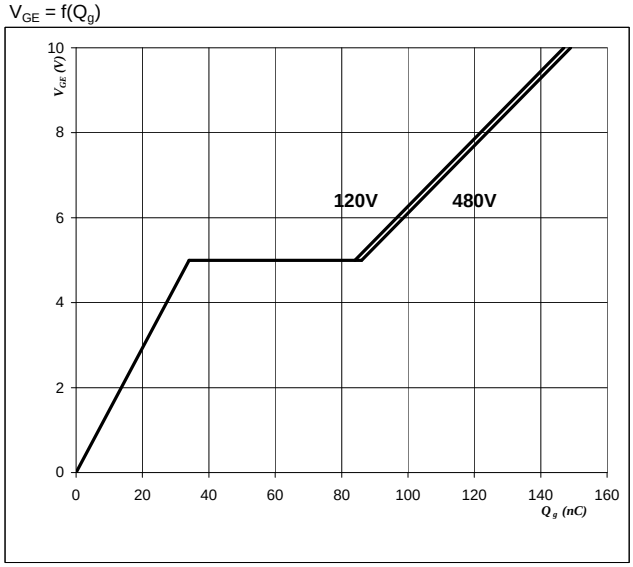

At

I_C = 44 A

Boost

Figure 1 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

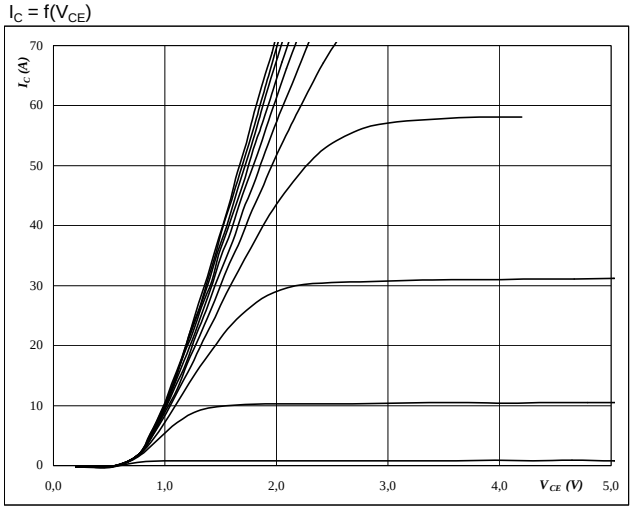

At

t_p = 250 µs

T_j = 25 °C

V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

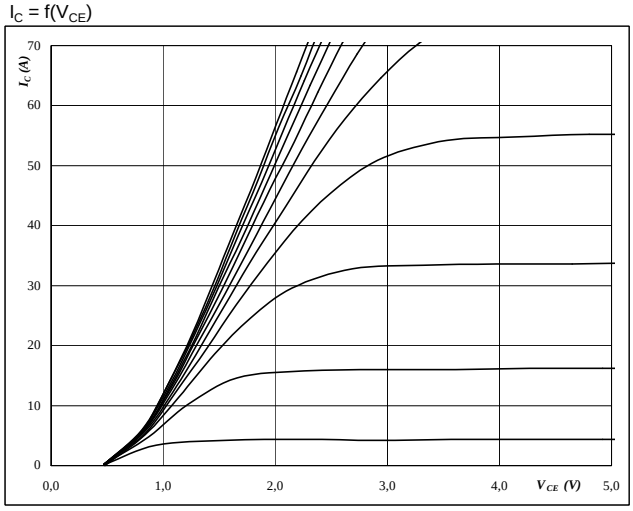

At

t_p = 250 µs

T_j = 125 °C

V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 IGBT

Typical transfer characteristics

$I_C = f(V_{GE})$

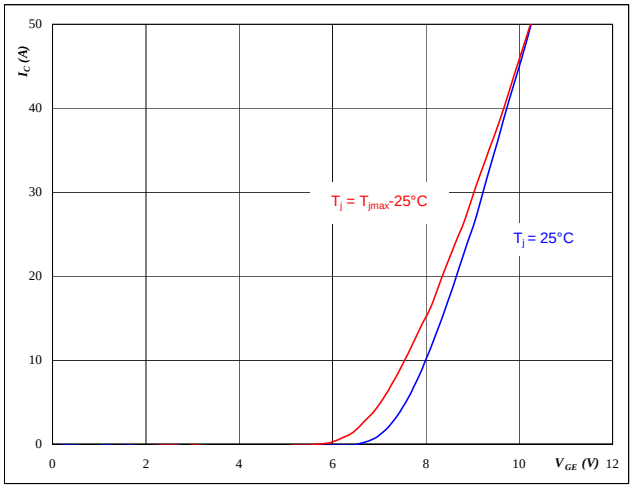

At

t_p = 250 µs

V_{CE} = 10 V

Figure 4 IGBT

IGBT transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

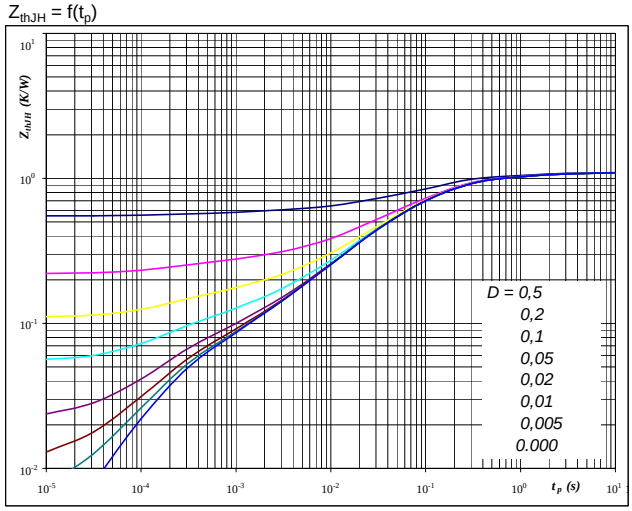

At

D = tp / T

R_{thJH} = 1,10 K/W

Boost

Figure 5 IGBT

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

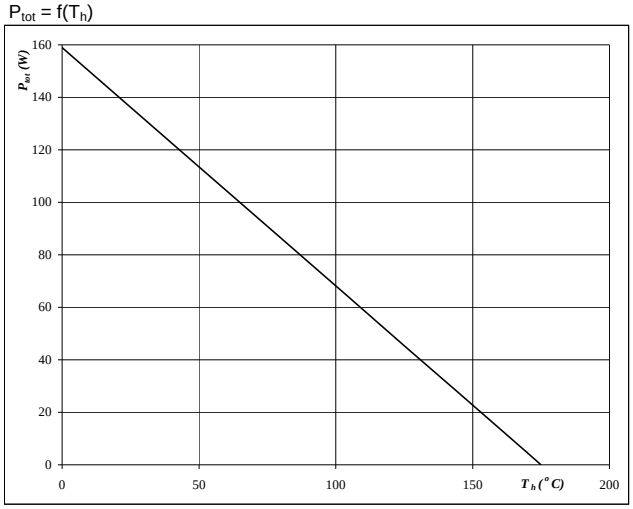

At

T_j = 175 ºC

Figure 6 IGBT

Collector current as a function of heatsink temperature

$I_C = f(T_h)$

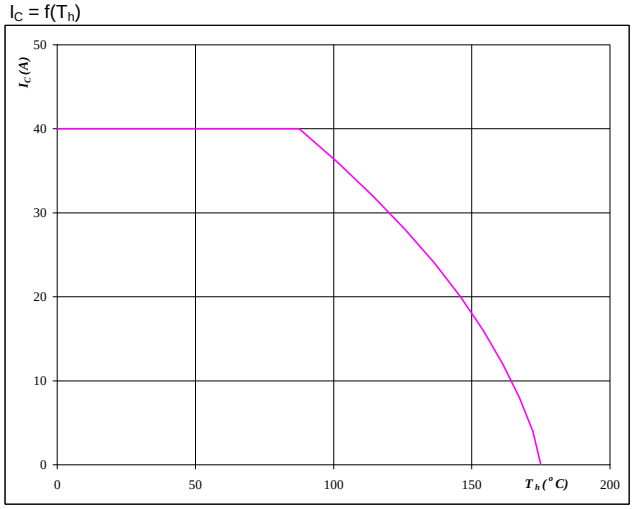

At

T_j = 175 ºC

V_{GE} = 15 V

INPUT BOOST

Figure 1 BOOST MOSFET

Typical output characteristics

$I_D = f(V_{DS})$

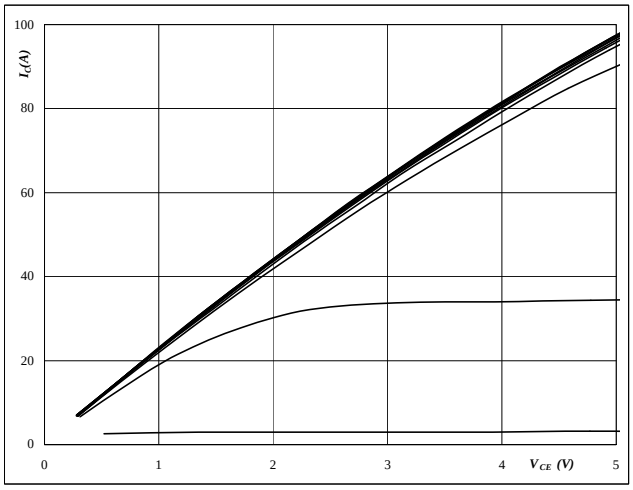

At

t_p = 250 µs

T_j = 25 °C

V_{GS} from 4 V to 14 V in steps of 1 V

Figure 2 BOOST FRED

Typical output characteristics

$I_D = f(V_{DS})$

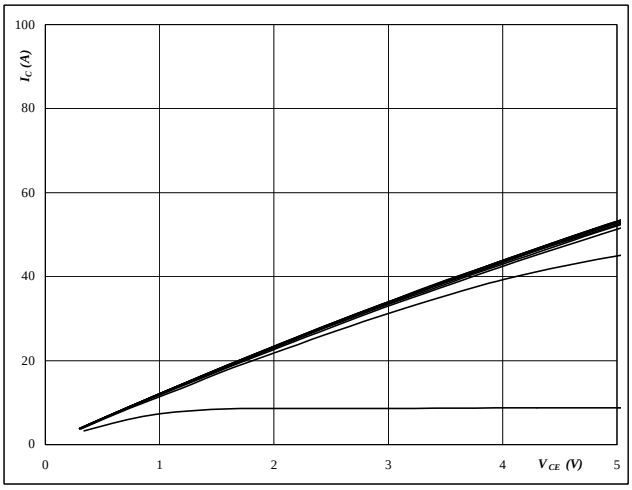

At

t_p = 250 µs

T_j = 126 °C

V_{GS} from 4 V to 14 V in steps of 1 V

Figure 3 BOOST MOSFET

Typical transfer characteristics

$I_D = f(V_{DS})$

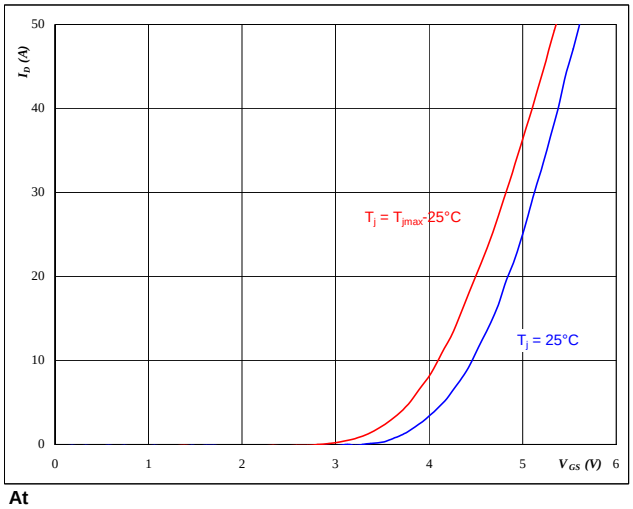

At

t_p = 250 µs

V_{DS} = 10 V

Figure 4 BOOST FRED

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

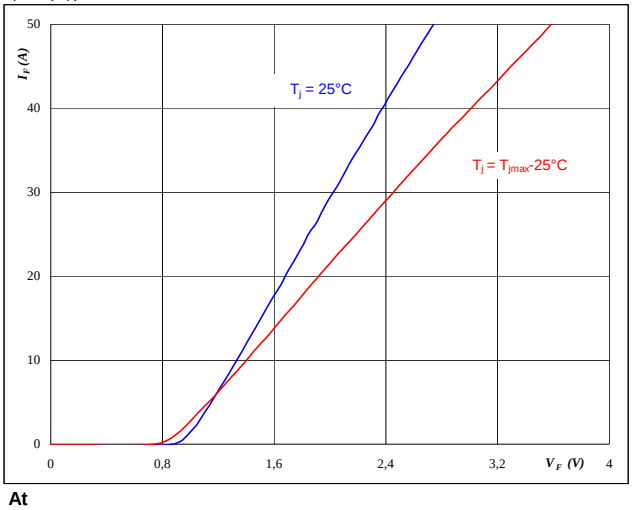

At

t_p = 250 µs

INPUT BOOST

Figure 5 BOOST MOSFET

Typical switching energy losses
as a function of collector current
$E = f(I_D)$

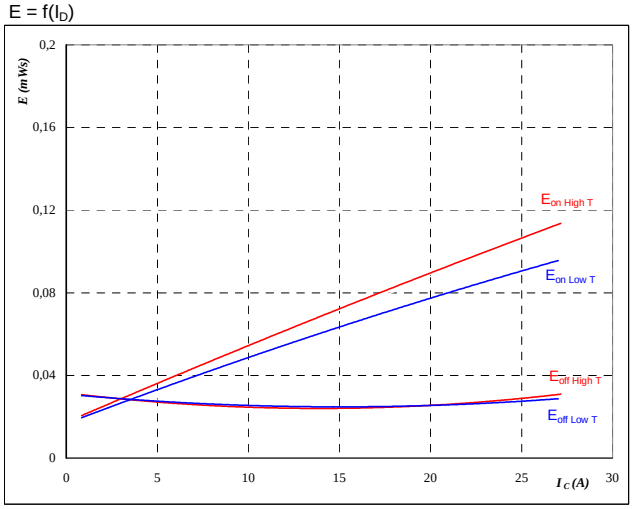

With an inductive load at

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 6 BOOST MOSFET

Typical switching energy losses
as a function of gate resistor
$E = f(R_G)$

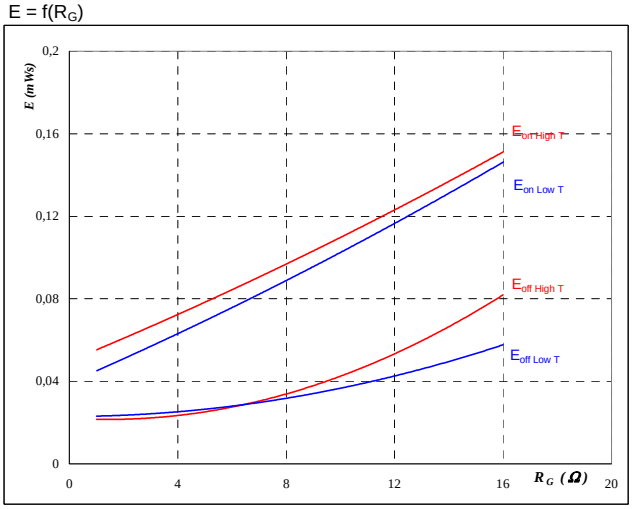

With an inductive load at

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_D =	15	A

Figure 7 BOOST MOSFET

Typical reverse recovery energy loss
as a function of collector (drain) current
$E_{rec} = f(I_c)$

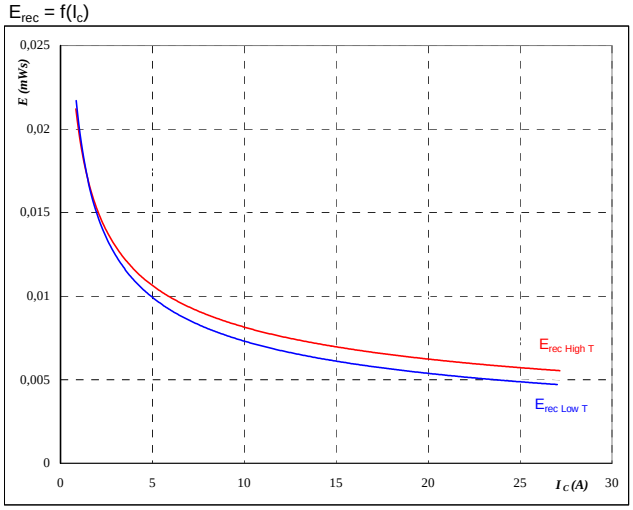

With an inductive load at

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 8 BOOST MOSFET

Typical reverse recovery energy loss
as a function of gate resistor
$E_{rec} = f(R_G)$

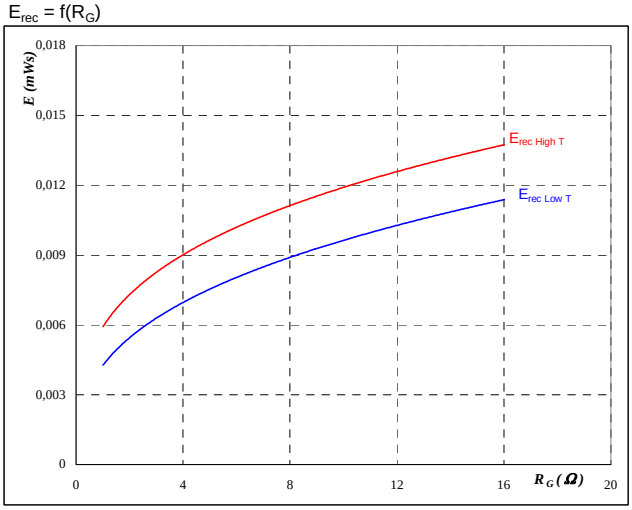

With an inductive load at

T_j =	25/125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_D =	15	A

INPUT BOOST

Figure 9 BOOST MOSFET

Typical switching times as a function of collector current

t = f(I_D)

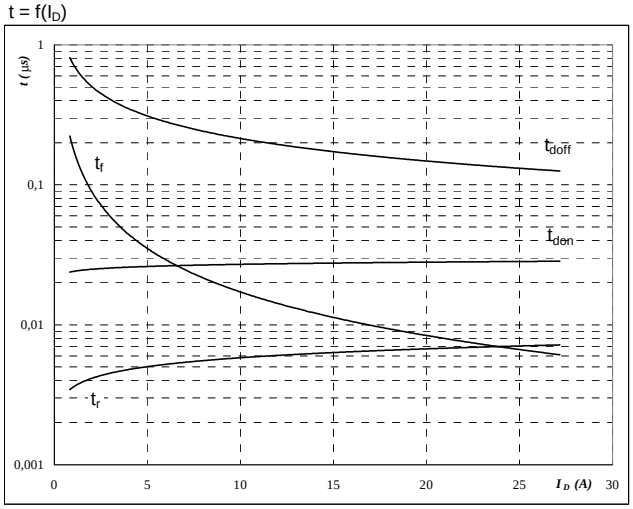

With an inductive load at

T_j =	125	°C
V_{DS} =	400	V
V_{GS} =	10	V
R_{gon} =	4	Ω
R_{goff} =	4	Ω

Figure 10 BOOST MOSFET

Typical switching times as a function of gate resistor

t = f(R_G)

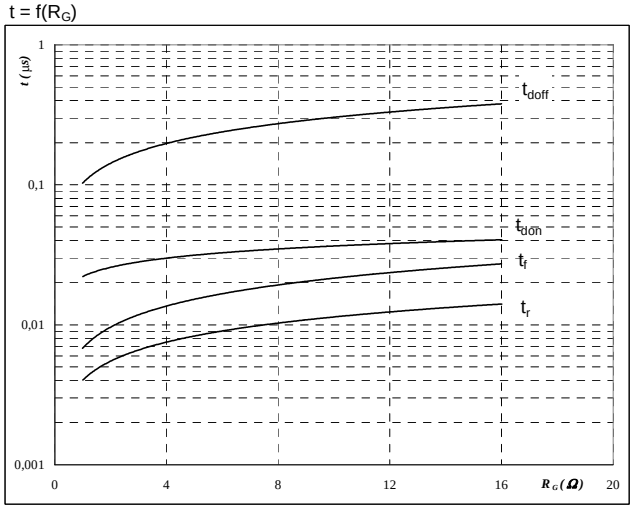

With an inductive load at

T_j =	125	°C
V_{DS} =	400	V
V_{GS} =	10	V
I_C =	15	A

Figure 11 BOOST FRED

Typical reverse recovery time as a function of collector current

t_{rr} = f(Ic)

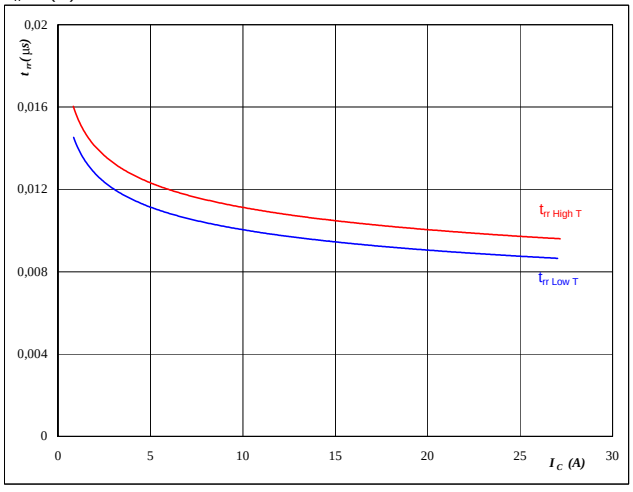

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 12 BOOST FRED

Typical reverse recovery time as a function of IGBT turn on gate resistor

t_{rr} = f(R_{gon})

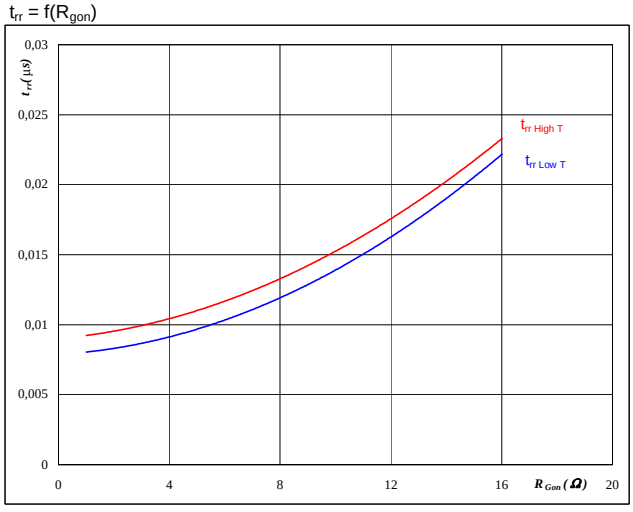

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

INPUT BOOST

Figure 13 BOOST FRED

Typical reverse recovery charge as a function of collector current

$Q_{rr} = f(I_C)$

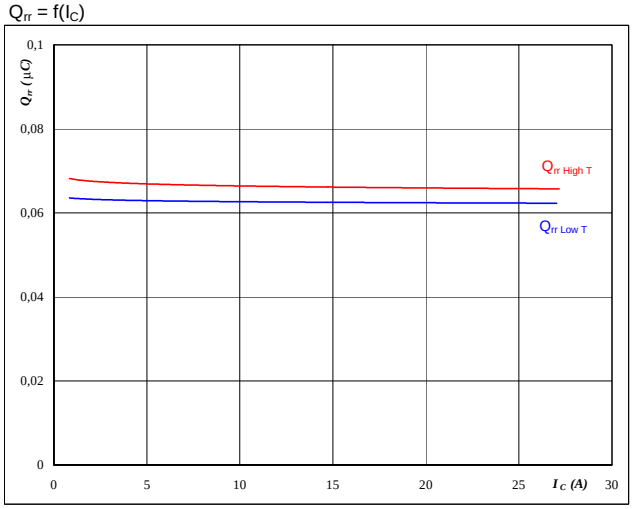

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 14 BOOST FRED

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$Q_{rr} = f(R_{gon})$

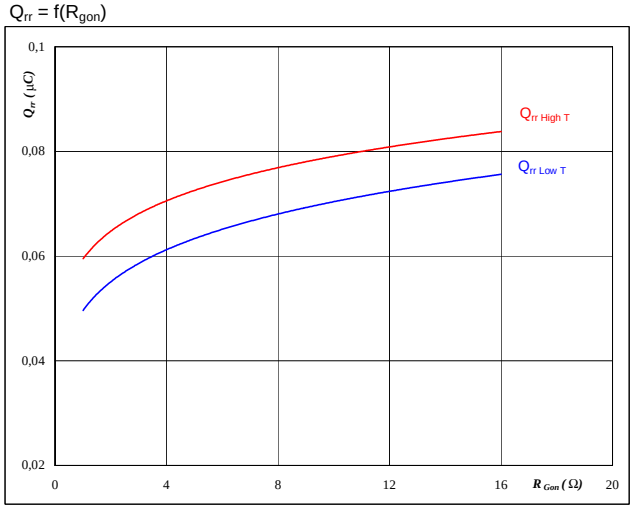

At

Tj =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

Figure 15 BOOST FRED

Typical reverse recovery current as a function of collector current

$I_{RRM} = f(I_C)$

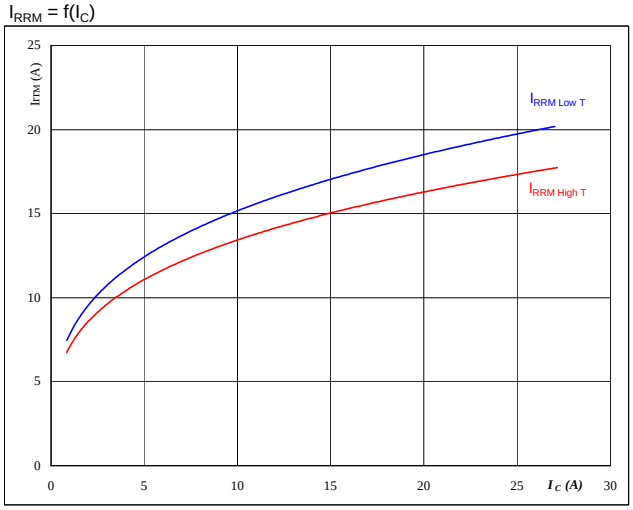

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 16 BOOST FRED

Typical reverse recovery current as a function of IGBT turn on gate resistor

$I_{RRM} = f(R_{gon})$

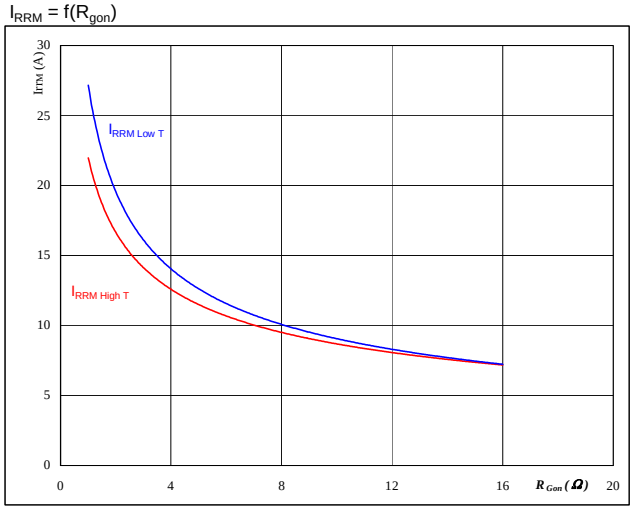

At

T_j =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

INPUT BOOST

Figure 17 BOOST FRED

Typical rate of fall of forward and reverse recovery current as a function of collector current

$dI_0/dt, dI_{rec}/dt = f(Ic)$

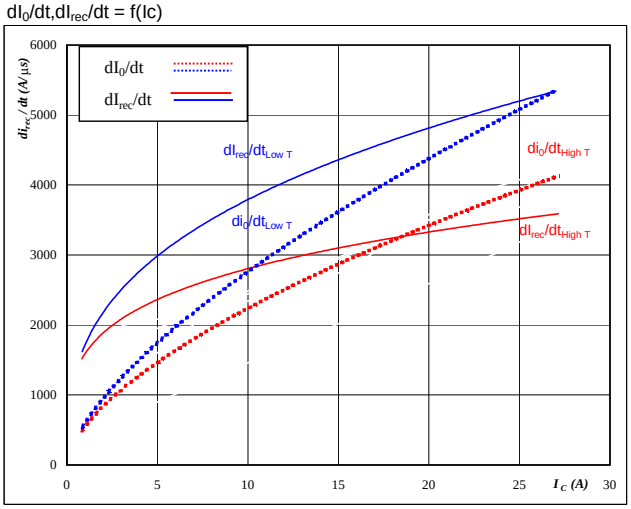

At

T_j =	25/125	°C
V_{CE} =	400	V
V_{GE} =	10	V
R_{gon} =	4	Ω

Figure 18 BOOST FRED

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$dI_0/dt, dI_{rec}/dt = f(R_{gon})$

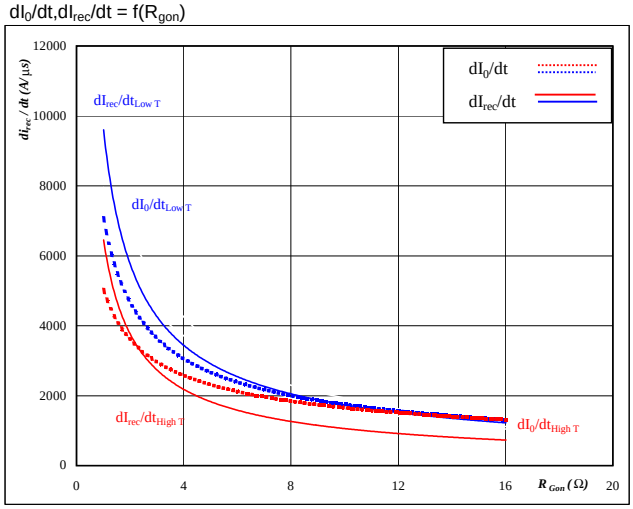

At

Tj =	25/125	°C
V_R =	400	V
I_F =	15	A
V_{GS} =	10	V

Figure 19 BOOST MOSFET

IGBT/MOSFET transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

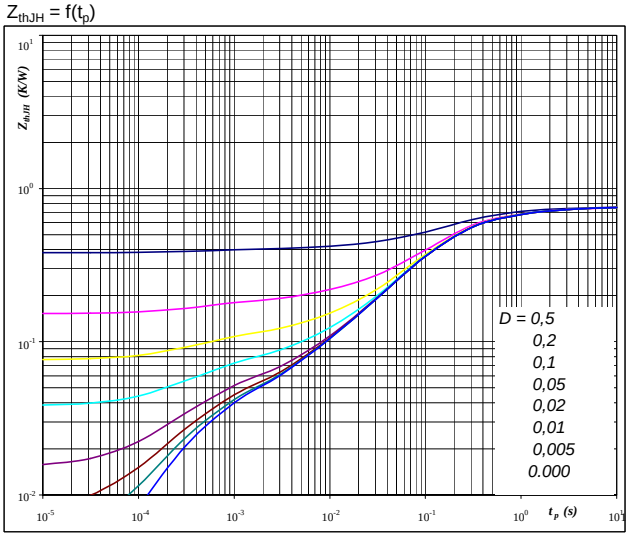

At

D =	t_p / T	
R_{thJH} =	0,76	K/W

IGBT thermal model values

R (C/W)	Tau (s)
0,03247	9,971
0,1223	1,22
0,4264	0,1797
0,1173	0,04698
0,03103	0,005891
0,03298	0,0004038

Figure 20 BOOST FRED

FRED transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

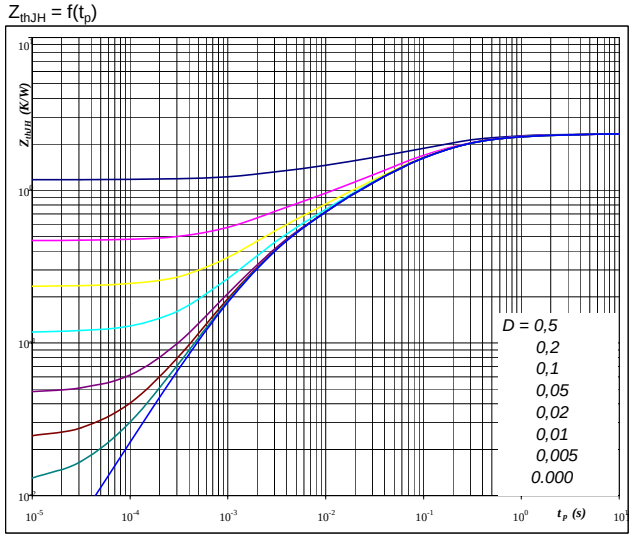

At

D =	t_p / T	
R_{thJH} =	2,34	K/W

FRED thermal model values

R (C/W)	Tau (s)
0,1024	2,885
0,495	0,3437
0,9886	0,07039
0,4865	0,01004
0,2673	0,001614

INPUT BOOST

Figure 21 BOOST MOSFET

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

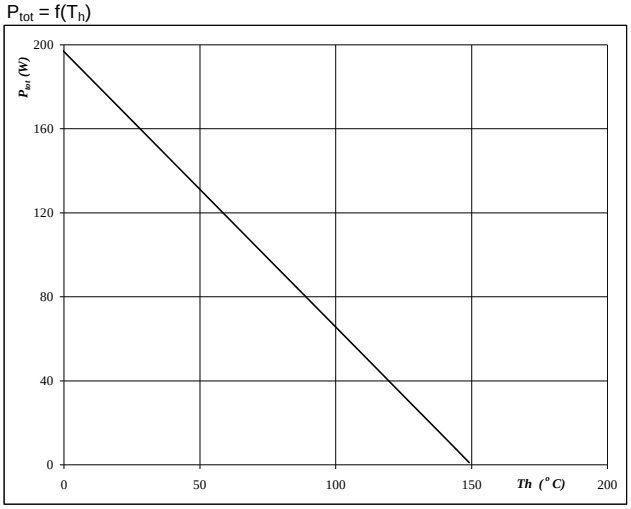

At

T_j = 150 ºC

Figure 22 BOOST MOSFET

Collector/Drain current as a function of heatsink temperature

$I_C = f(T_h)$

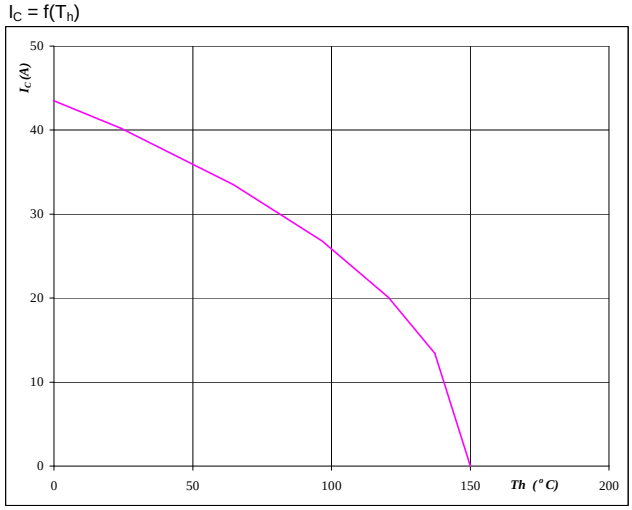

At

T_j = 150 ºC

V_{GS} = 10 V

Figure 23 BOOST FRED

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

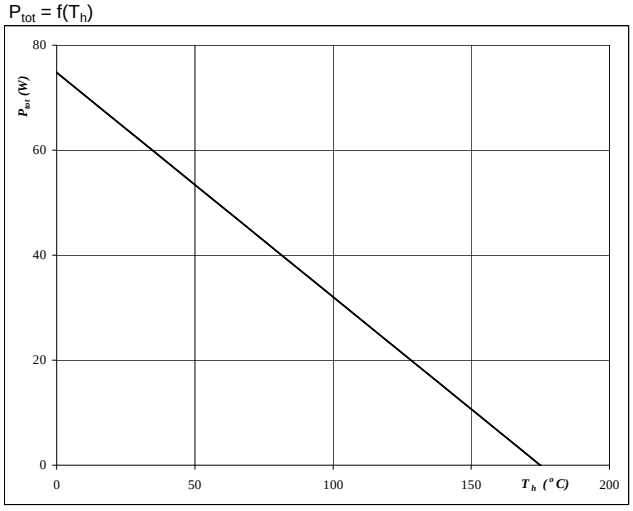

At

T_j = 175 ºC

Figure 24 BOOST FRED

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

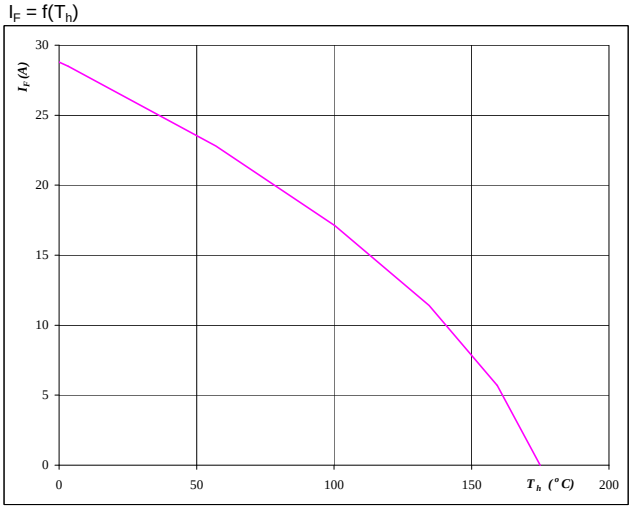

At

T_j = 175 ºC

INPUT BOOST

Figure 25 BOOST MOSFET

Safe operating area as a function of drain-source voltage

$I_D = f(V_{DS})$

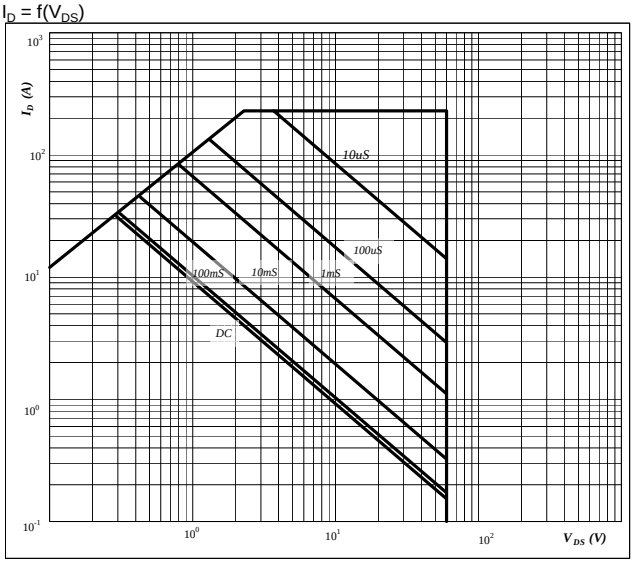

At

D =	single pulse	
T_h =	80	ºC
V_{GS} =	10	V
T_j =	T_{jmax}	ºC

Figure 26 BOOST MOSFET

Gate voltage vs Gate charge

$V_{GS} = f(Qg)$

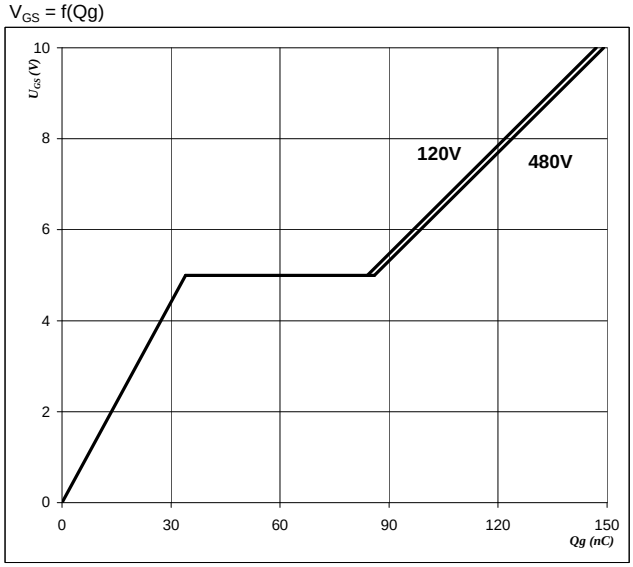

At

I_D =	44	A

Bypass Diode

Figure 1 Bypass diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

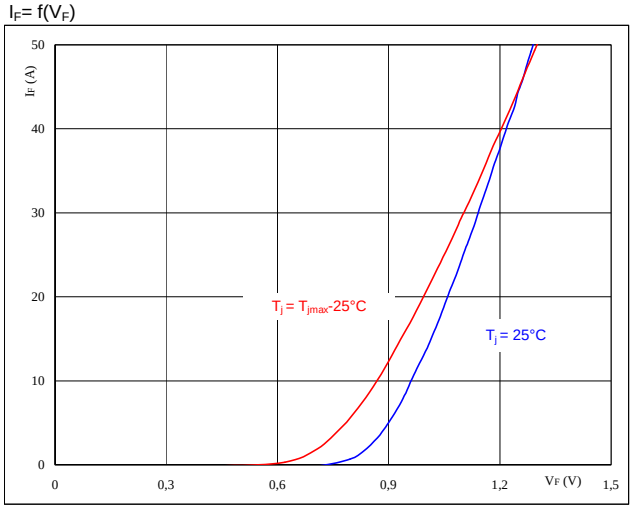

At

t_p = 250 µs

Figure 2 Bypass diode

Diode transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

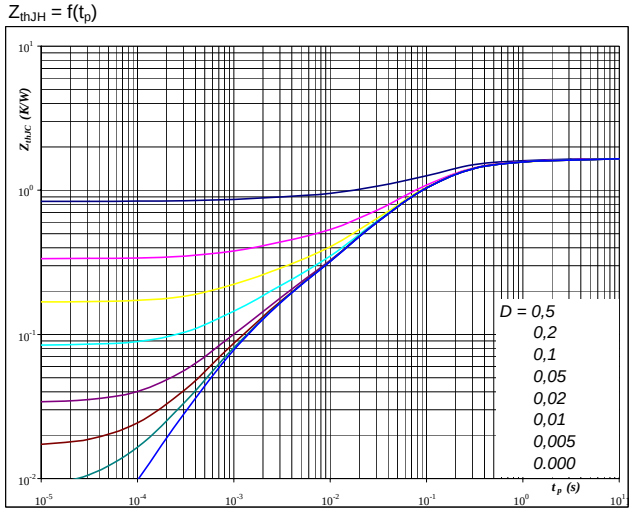

At

D = t_p / T

R_{thJH} = 1,677 K/W

Figure 3 Bypass diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

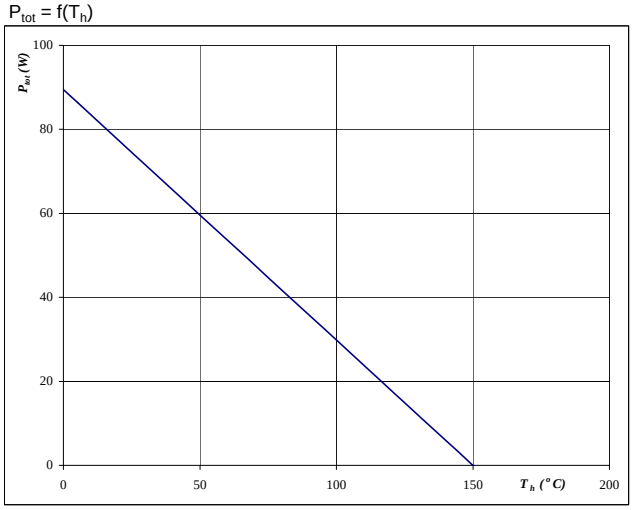

At

T_j = 150 ºC

Figure 4 Bypass diode

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

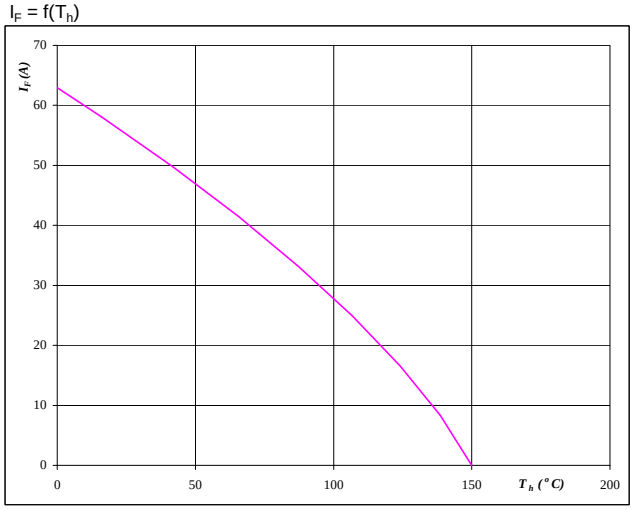

At

T_j = 150 ºC

Thermistor

Figure 1 Thermistor

Typical NTC characteristic
as a function of temperature

$R_T = f(T)$

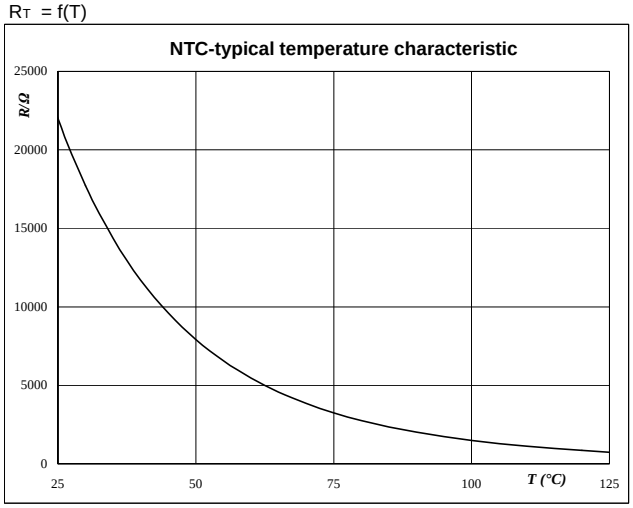

Figure 2 Thermistor

Typical NTC resistance values

$$R(T) = R_{25} \cdot e^{\left(B_{25/100}\left(\frac{1}{T}-\frac{1}{T_{25}}\right)\right)} \quad [\Omega]$$

T [°C]	R_{nom} [Ω]	R_{min} [Ω]	R_{max} [Ω]	△R/R [±%]
-55	2089434,5	1506495,4	2672373,6	27,9
0	71804,2	59724,4	83884	16,8
10	43780,4	37094,4	50466,5	15,3
20	27484,6	23684,6	31284,7	13,8
25	22000	19109,3	24890,7	13,1
30	17723,3	15512,2	19934,4	12,5
60	5467,9	4980,6	5955,1	8,9
70	3848,6	3546	4151,1	7,9
80	2757,7	2568,2	2947,1	6,9
90	2008,9	1889,7	2128,2	5,9
100	**1486,1**	**1411,8**	**1560,4**	**5**
150	400,2	364,8	435,7	8,8

Switching Definitions BUCK MOSFET

General conditions

T_j	=	125 °C
R_{gon}	=	4 Ω
R_{goff}	=	4 Ω

Figure 1 Output inverter IGBT

Turn-off Switching Waveforms & definition of t_{doff}, t_{Eoff}
(t_{Eoff} = integrating time for E_{off})

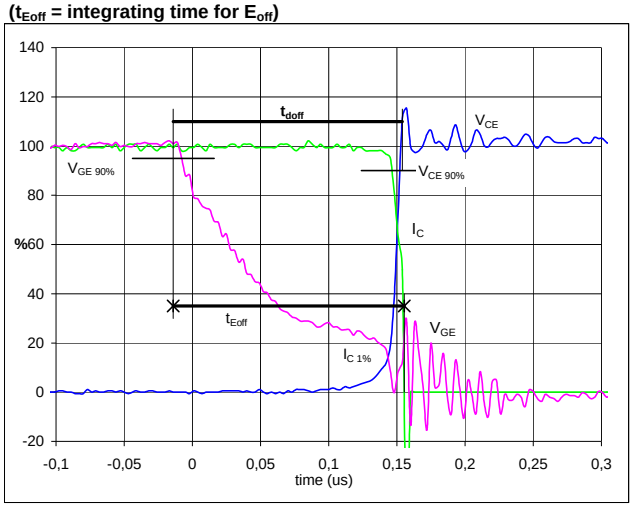

V_{GE} (0%) =	0	V
V_{GE} (100%) =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
t_{doff} =	0,16	µs
t_{Eoff} =	0,17	µs

Figure 2 Output inverter IGBT

Turn-on Switching Waveforms & definition of t_{don}, t_{Eon}
(t_{Eon} = integrating time for E_{on})

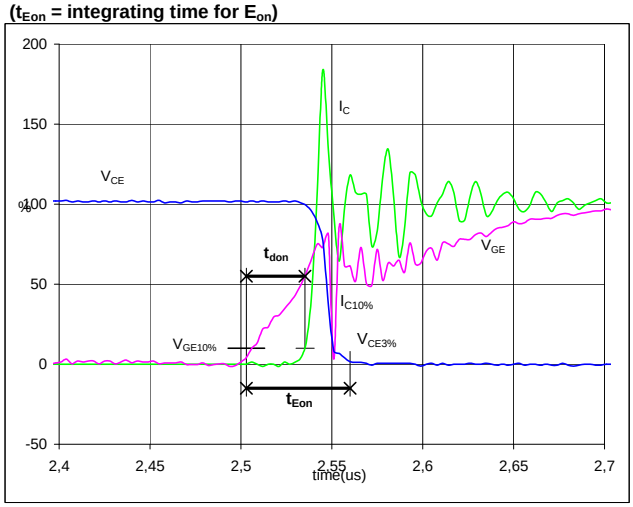

V_{GE} (0%) =	0	V
V_{GE} (100%) =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
t_{don} =	0,03	µs
t_{Eon} =	0,06	µs

Figure 3 Output inverter IGBT

Turn-off Switching Waveforms & definition of t_f

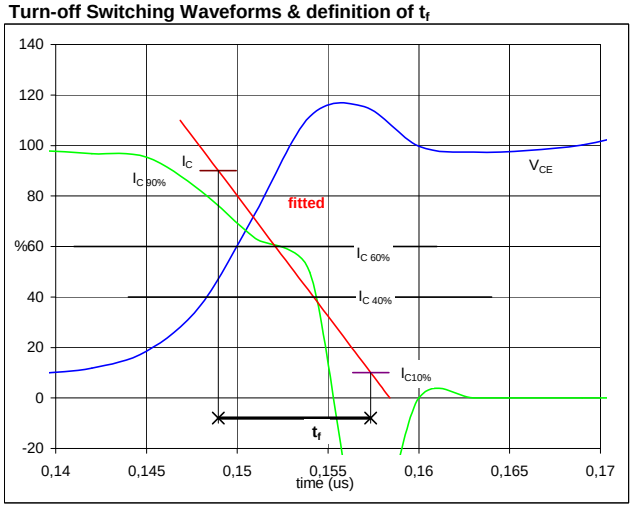

V_C (100%) =	400	V
I_C (100%) =	15	A
t_f =	0,01	µs

Figure 4 Output inverter IGBT

Turn-on Switching Waveforms & definition of t_r

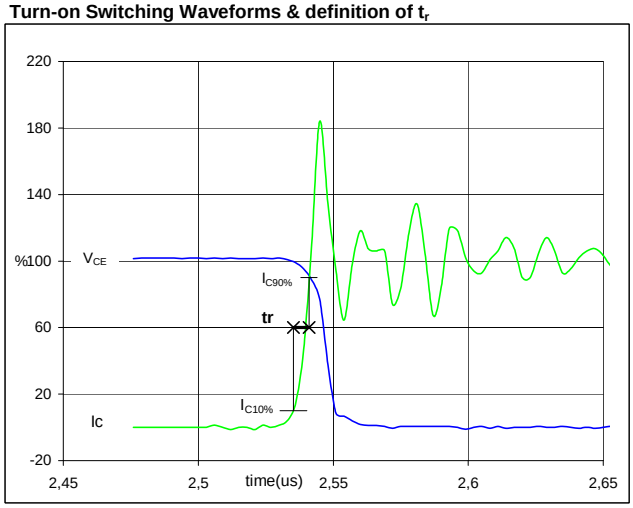

V_C (100%) =	400	V
I_C (100%) =	15	A
t_r =	0,01	µs

Switching Definitions BUCK MOSFET

Figure 5 Output inverter IGBT

Turn-off Switching Waveforms & definition of t_{Eoff}

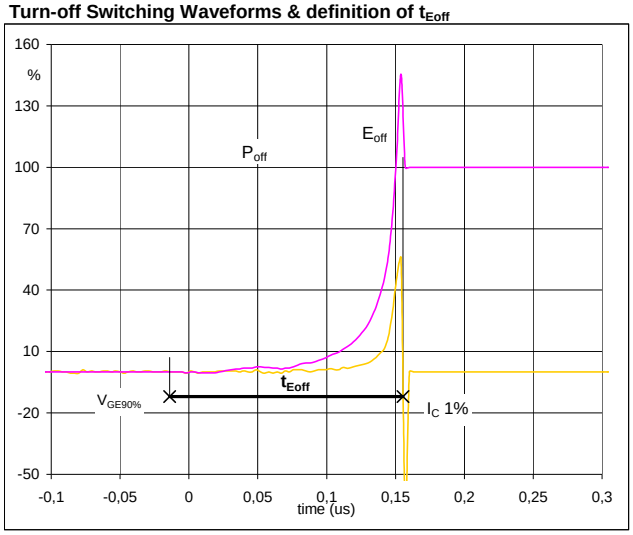

P_{off} (100%) =	6,01	kW
E_{off} (100%) =	0,02	mJ
t_{Eoff} =	0,17	µs

Figure 6 Output inverter IGBT

Turn-on Switching Waveforms & definition of t_{Eon}

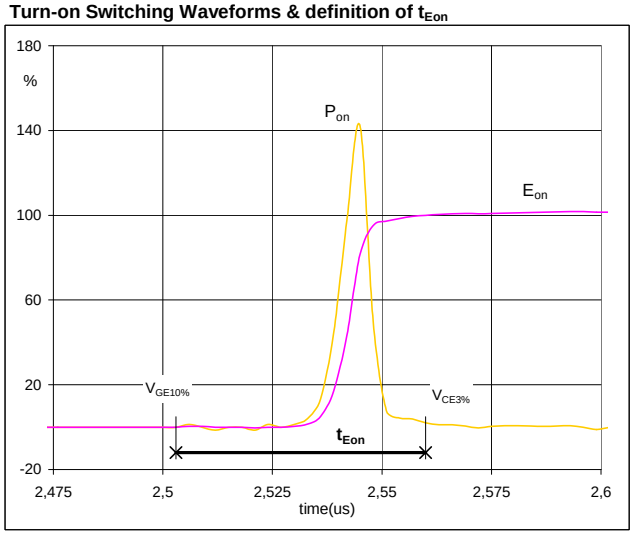

P_{on} (100%) =	6,01	kW
E_{on} (100%) =	0,07	mJ
t_{Eon} =	0,06	µs

Figure 7 Output inverter FRED

Gate voltage vs Gate charge (measured)

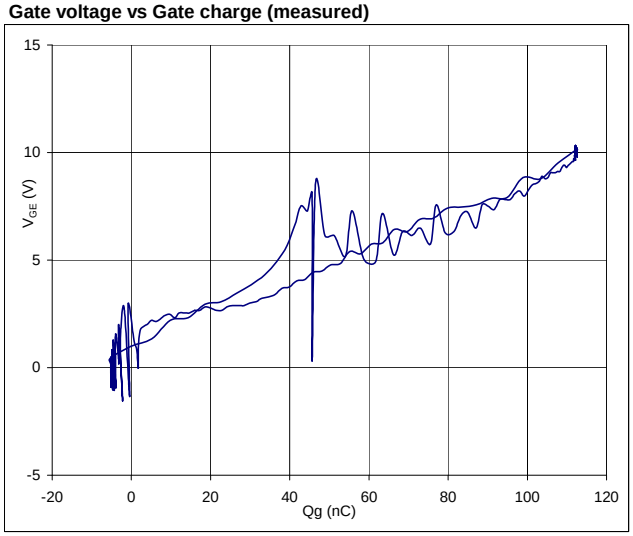

V_{GEoff} =	0	V
V_{GEon} =	10	V
V_C (100%) =	400	V
I_C (100%) =	15	A
Q_g =	112,54	nC

Figure 8 Output inverter IGBT

Turn-off Switching Waveforms & definition of t_{rr}

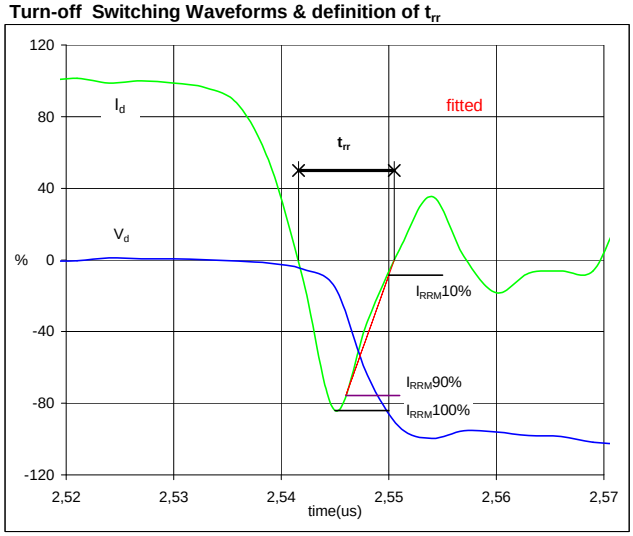

V_d (100%) =	400	V
I_d (100%) =	15	A
I_{RRM} (100%) =	-6	A
t_{rr} =	0,01	µs

Switching Definitions BUCK MOSFET

Figure 9 Output inverter FRED

Turn-on Switching Waveforms & definition of t_{Qrr}
(t_{Qrr} = integrating time for Q_{rr})

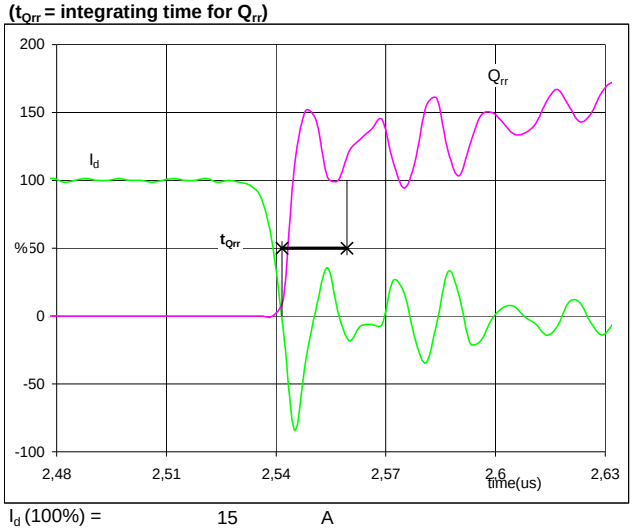

I_d (100%) =	15	A
Q_{rr} (100%) =	0,03	µC
t_{Qrr} =	0,02	µs

Figure 10 Output inverter FRED

Turn-on Switching Waveforms & definition of t_{Erec}
(t_{Erec}= integrating time for E_{rec})

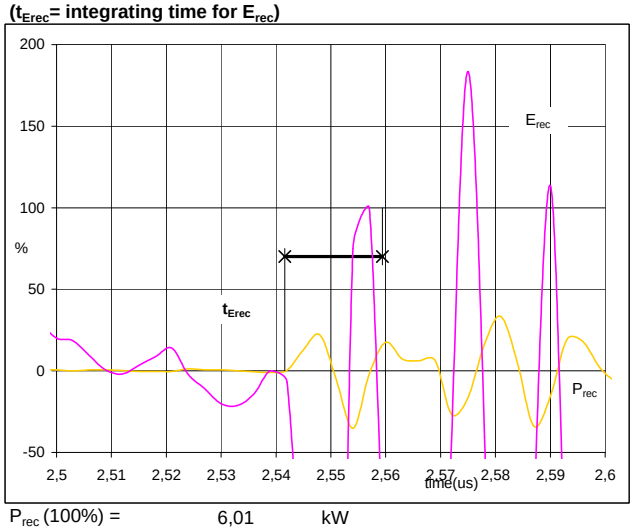

P_{rec} (100%) =	6,01	kW
E_{rec} (100%) =	0,01	mJ
t_{Erec} =	0,02	µs

Measurement circuits

Figure 11

BUCK stage switching measurement circuit

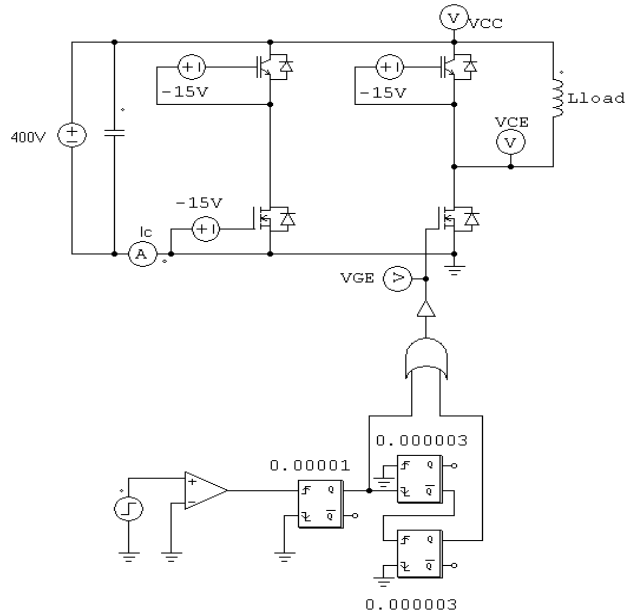

Ordering Code and Marking - Outline - Pinout

Ordering Code & Marking

	Ordering Code	in DataMatrix as	in packaging barcode as
without thermal paste 12mm housing	10-FZ06BIA045FH-P897E	P897E	P897E

Outline

Pin table		
Pin	X	Y
1	28,7	0
2	25,9	0
3	23,1	0
4	17,6	0
5	12,1	0
6	9,3	0
7	2,8	0
8	0	0
9	0	5,05
10	0	10,55
11	0	16,15
12	0	22,6
13	9,3	22,6
14	12,1	22,6
15	17,6	22,6
16	23,1	22,6
17	25,9	22,6
18	28,7	22,6
19	33,6	20,05
20	33,6	14,55
21	33,6	8,05
22	33,6	2,55

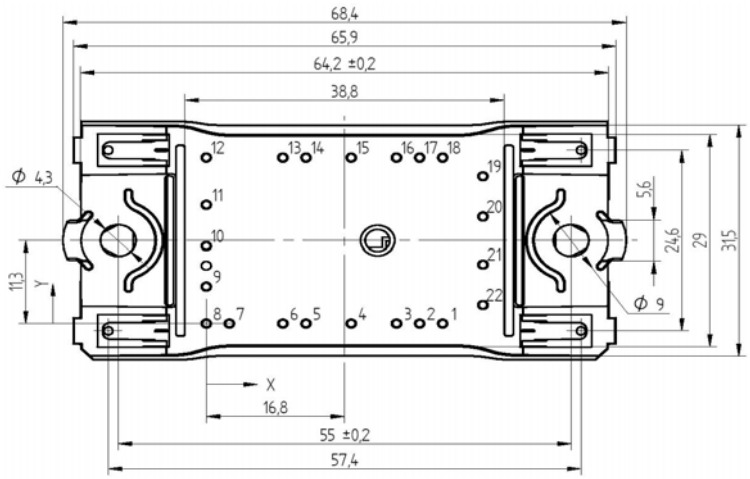

Pinout

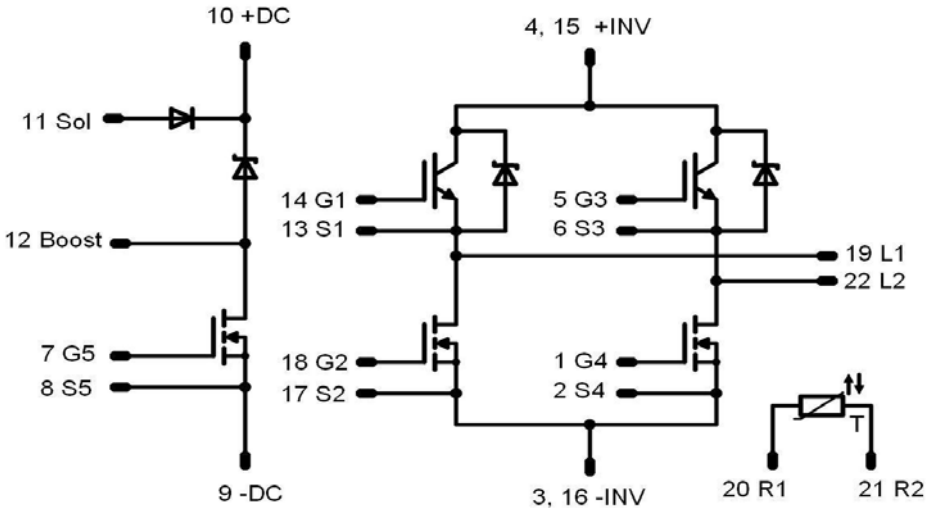

PRODUCT STATUS DEFINITIONS

Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data may be published at a later date. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.
Final	Full Production	This datasheet contains final specifications. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech.Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.