



SEMIPONT® 2

Controllable Bridge Rectifiers

SKDT 60

Features

- Fully controlled three phase bridge rectifier
- Robust plastic case with screw terminals
- Large, isolated base plate
- Blocking voltage to 1400V
- High surge currents
- Easy chassis mounting
- UL recognized, file no. E 63 532


Typical Applications

- For DC drives with a fixed direction of rotation
- For reversing DC drives
- Controlled field rectifiers for DC motors
- Controlled battery charger rectifiers







1) Painted metal shield of minimum 250 x 250 x 1 mm: $R_{th(c-a)} = 1,8 \text{ K/W}$

V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 60 \text{ A (full conduction)}$ ($T_c = 86^\circ \text{C}$)
400	400	SKDT 60/04
800	800	SKDT 60/08
1200	1200	SKDT 60/12
1400	1400	SKDT 60/14

Symbol	Conditions	Values	Units
I_D	$T_c = 85^\circ \text{C}$	61	A
	$T_a = 45^\circ \text{C}$; chassis 1)	16	A
	$T_a = 45^\circ \text{C}$; P13A/125	21	A
	$T_a = 45^\circ \text{C}$; P1A/120	34	A
I_{TSM}, I_{FSM}	$T_{vj} = 25^\circ \text{C}$; 10 ms	470	A
	$T_{vj} = 125^\circ \text{C}$; 10 ms	400	A
i^2t	$T_{vj} = 25^\circ \text{C}$; 8,3 ... 10 ms	1100	A ² s
	$T_{vj} = 125^\circ \text{C}$; 8,3 ... 10 ms	800	A ² s
V_T	$T_{vj} = 25^\circ \text{C}$; $I_T = 75 \text{ A}$	max. 2,3	V
$V_{T(TO)}$	$T_{vj} = 125^\circ \text{C}$	max. 1	V
r_T	$T_{vj} = 125^\circ \text{C}$	max. 16	mΩ
I_{DD}, I_{RD}	$T_{vj} = 125^\circ \text{C}$; $V_{DD} = V_{DRM}$; $V_{RD} = V_{RRM}$	max. 10	mA
t_{gd}	$T_{vj} = 25^\circ \text{C}$; $I_G = 1 \text{ A}$; $di_G/dt = 1 \text{ A/μs}$	1	μs
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	1	μs
$(dv/dt)_{cr}$	$T_{vj} = 125^\circ \text{C}$	max. 500	V/μs
$(di/dt)_{cr}$	$T_{vj} = 125^\circ \text{C}$; $f = 50 \text{ Hz}$	max. 50	A/μs
t_q	$T_{vj} = 125^\circ \text{C}$; typ.	80	μs
I_H	$T_{vj} = 25^\circ \text{C}$; typ. / max.	100 / 200	mA
I_L	$T_{vj} = 25^\circ \text{C}$; $R_G = 33 \Omega$	250 / 400	mA
V_{GT}	$T_{vj} = 25^\circ \text{C}$; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25^\circ \text{C}$; d.c.	min. 150	mA
V_{GD}	$T_{vj} = 125^\circ \text{C}$; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 125^\circ \text{C}$; d.c.	max. 5	mA
$R_{th(j-c)}$	per thyristor / diode	1	K/W
	total	0,167	K/W
$R_{th(c-s)}$	total	0,05	K/W
T_{vj}		- 40 ... + 125	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 (3000)	V
M_s	to heatsink	5	Nm
M_t	to terminals	3	Nm
m		165	g
Case	SKDT	G 21	

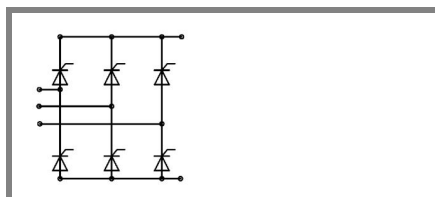

SKDT

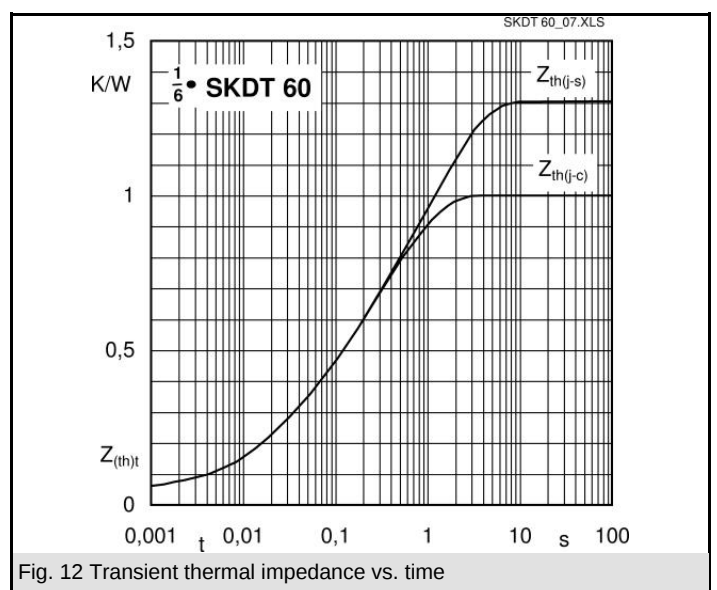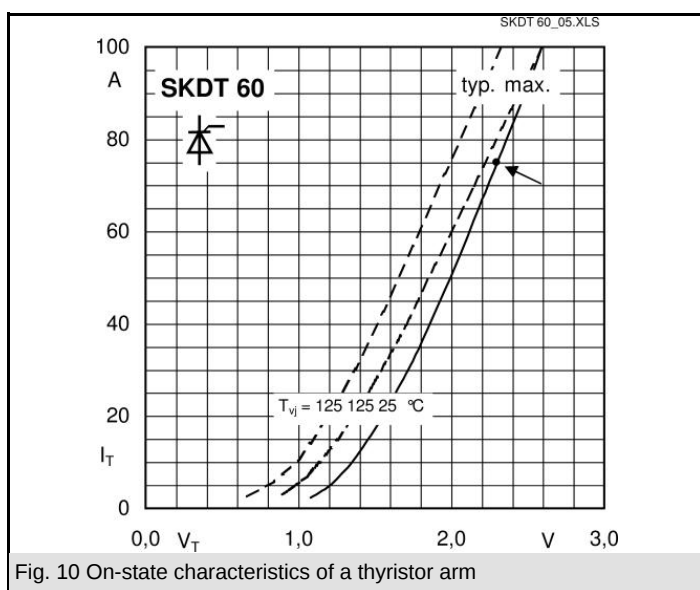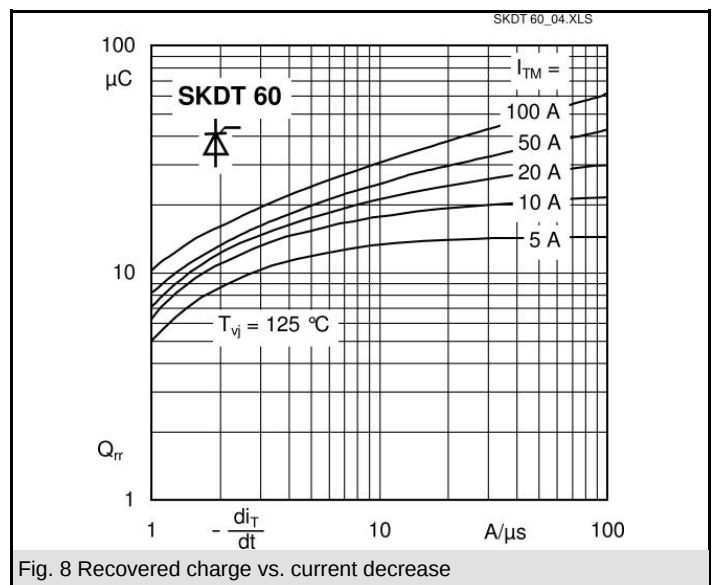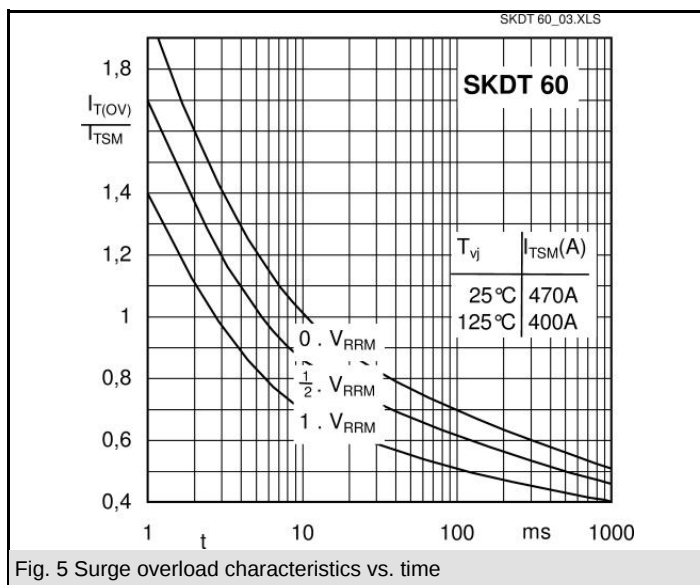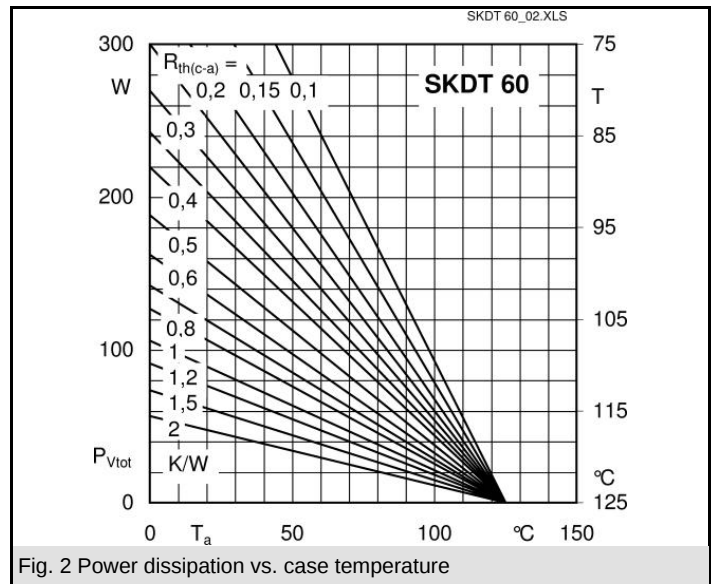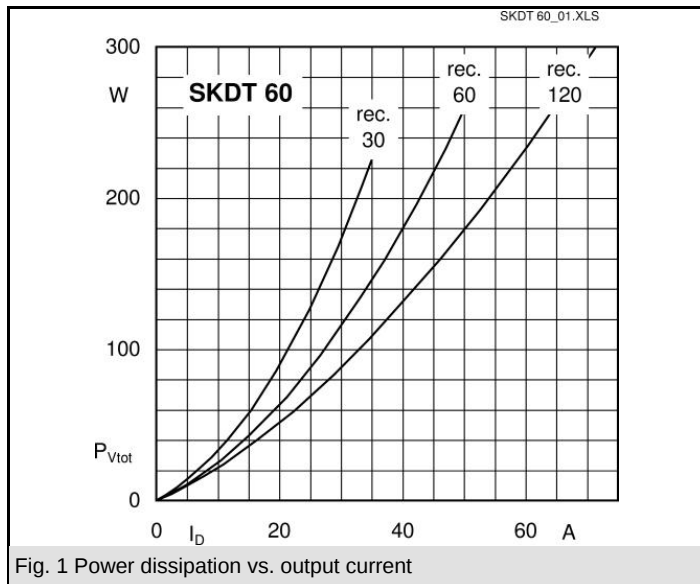


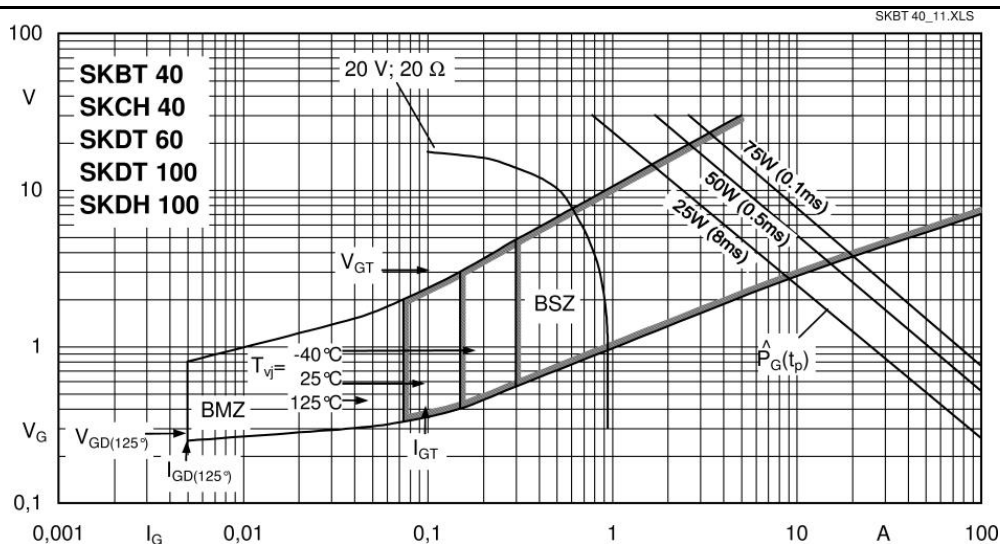


Fig. 11 Gate characteristics of a thyristor device

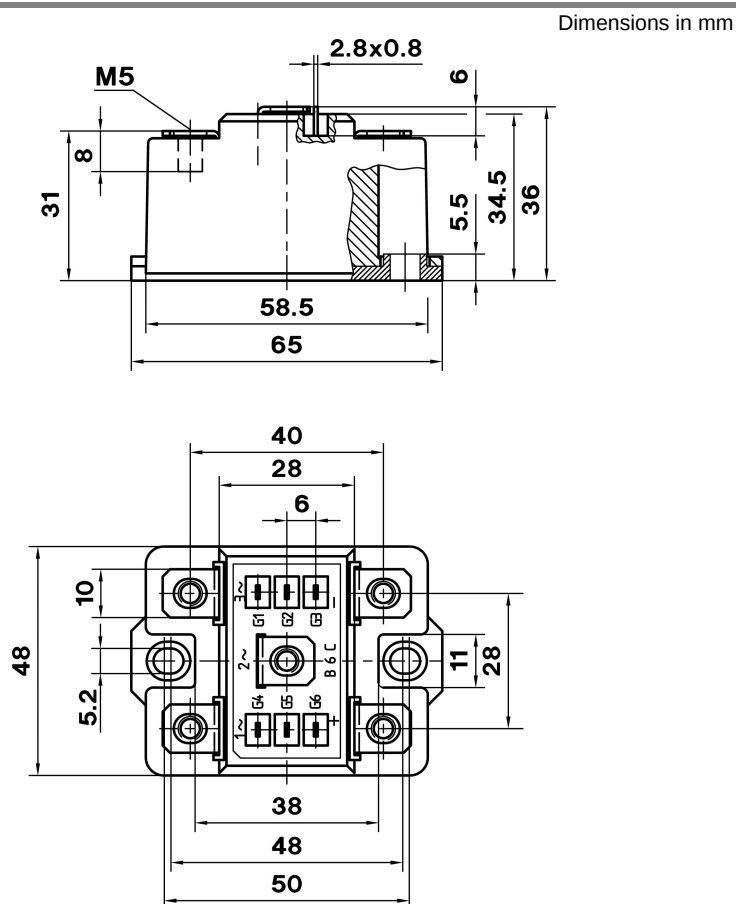

Case G 21

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.