

RF Power MOSFET Transistor 120W, 2-175MHz, 28V

M/A-COM Products
Released; RoHS Compliant

Features

- N-Channel enhancement mode device
- DMOS structure
- Lower capacitances for broadband operation
- High saturated output power
- Lower noise figure than bipolar devices

ABSOLUTE MAXIMUM RATINGS AT 25°C

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	65	V
Gate-Source Voltage	V_{GS}	20	V
Drain-Source Current	I_{DS}	24	A
Power Dissipation	P_D	269	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-55 to +150	°C
Thermal Resistance	θ_{JC}	0.65	°C/W

TYPICAL DEVICE IMPEDANCE

F (MHz)	$Z_{IN} (\Omega)$	$Z_{LOAD} (\Omega)$
30	4.0 - j8.0	3.4 + j2.4
50	1.0 - j2.5	2.2 + j1.3
100	1.0 - j0.5	2.2 + j0.0

$V_{DD} = 28V$, $I_{DQ} = 600mA$, $P_{OUT} = 120 W$


Z_{IN} is the series equivalent input impedance of the device from gate to source.

Z_{LOAD} is the optimum series equivalent load impedance as measured from drain to ground.

ELECTRICAL CHARACTERISTICS AT 25°C





Parameter	Symbol	Min	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	65	-	V	$V_{GS} = 0.0 V$, $I_{DS} = 3.0 mA$
Drain-Source Leakage Current	I_{DSS}	-	6.0	mA	$V_{GS} = 28.0 V$, $V_{DS} = 0.0 V$
Gate-Source Leakage Current	I_{GSS}	-	6.0	μA	$V_{GS} = 20.0 V$, $V_{DS} = 0.0 V$
Gate Threshold Voltage	$V_{GS(TH)}$	2.0	6.0	V	$V_{DS} = 10.0 V$, $I_{DS} = 600.0 mA$
Forward Transconductance	G_M	3.0	-	S	$V_{DS} = 10.0 V$, $I_{DS} = 6000.0 mA$, $\Delta V_{GS} = 1.0V$, 80 μs Pulse
Input Capacitance	C_{ISS}	-	270	pF	$V_{DS} = 28.0 V$, $F = 1.0 MHz$
Output Capacitance	C_{OSS}	-	240	pF	$V_{DS} = 28.0 V$, $F = 1.0 MHz$
Reverse Capacitance	C_{RSS}	-	48	pF	$V_{DS} = 28.0 V$, $F = 1.0 MHz$
Power Gain	G_P	13	-	dB	$V_{DD} = 28.0 V$, $I_{DQ} = 600 mA$, $P_{OUT} = 120.0 W$ $F = 175 MHz$
Drain Efficiency	η_D	60	-	%	$V_{DD} = 28.0 V$, $I_{DQ} = 600 mA$, $P_{OUT} = 120.0 W$ $F = 175 MHz$
Load Mismatch Tolerance	VSWR-T	-	30:1	-	$V_{DD} = 28.0 V$, $I_{DQ} = 600 mA$, $P_{OUT} = 120.0 W$ $F = 175 MHz$

Package Outline

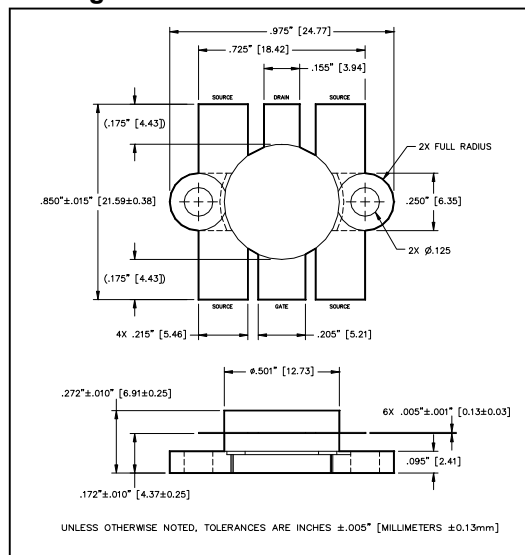


LETTER DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	24.64	24.89	.970	.980
B	18.29	18.54	.720	.730
C	21.21	21.97	.835	.865
D	12.60	12.85	.496	.506
E	6.22	6.48	.245	.255
F	3.81	4.06	.150	.160
G	5.33	5.59	.210	.220
H	5.08	5.33	.200	.210
J	3.05	3.30	.120	.130
K	2.29	2.54	.90	.100
L	4.06	4.57	.160	.180
M	6.68	7.49	.263	.295
N	.10	.15	.004	.006

Typical Broadband Performance Curves

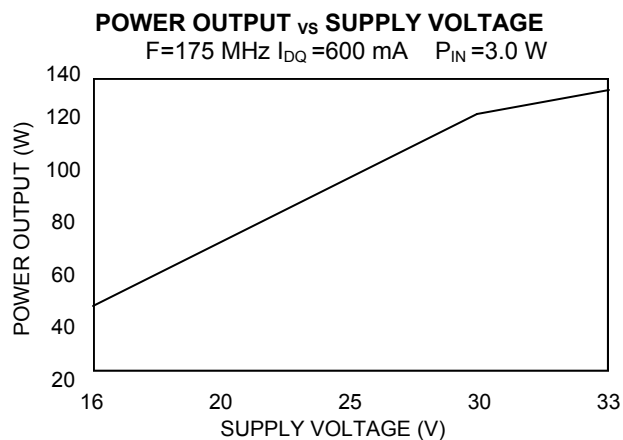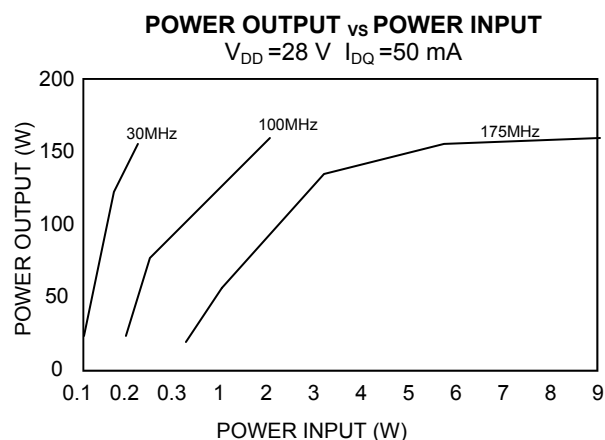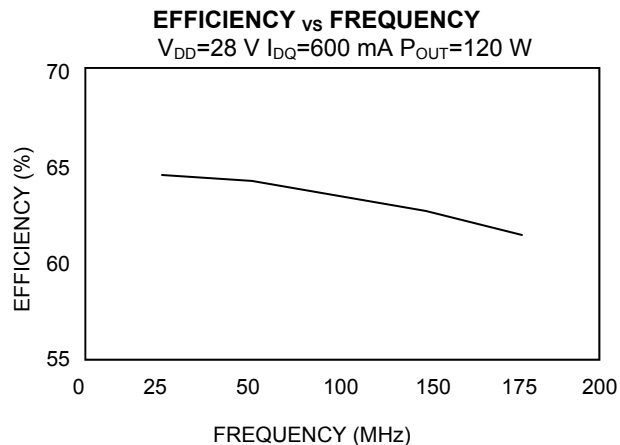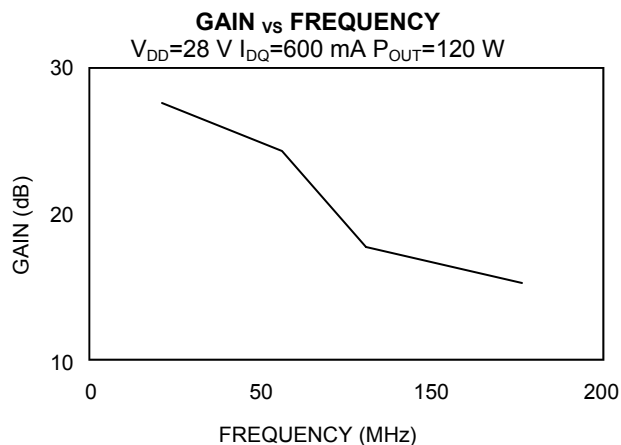

TEST FIXTURE SCHEMATIC

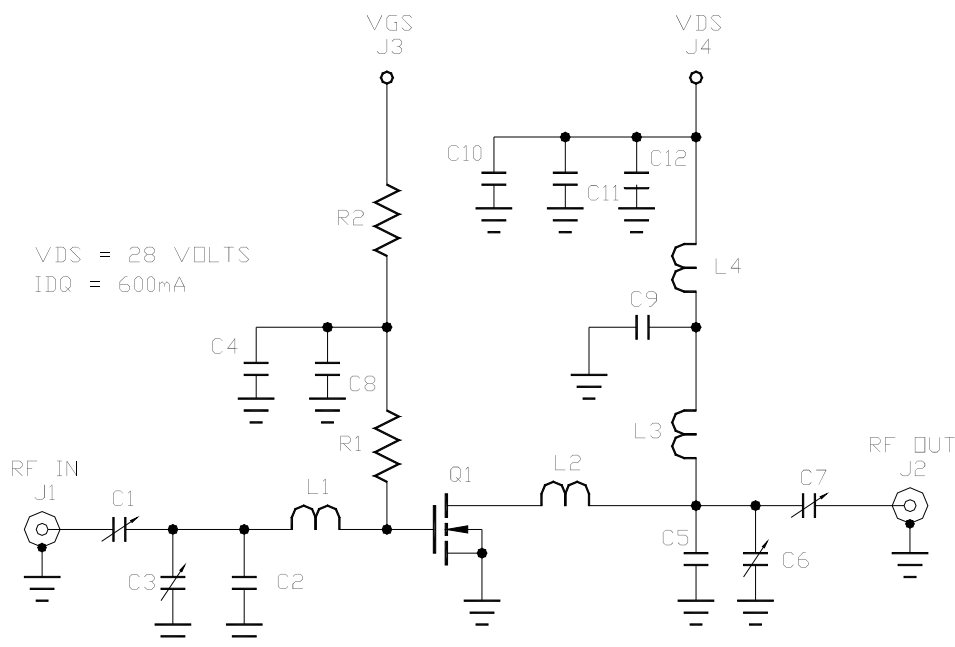

PARTS LIST

C1,C6	TRIMMER CAPACITOR 5-80pF
C2,C5	CAPACITOR 50pF
C3	TRIMMER CAPACITOR 4-40pF
C4,C11	MONOLITHIC CIRCUIT CAPACITOR 0.01uF
C7	TRIMMER CAPACITOR 9-180pF
C8,C9	CAPACITOR 500pF
C10	CAPACITOR 1000pF
C12	ELECTROLYTIC CAPACITOR 50uF 50 VOLT
L1,L2	NO. 12 AWG COPPER WIRE X 0.87" (LOOP 0.4")
L3,L4	8 TURNS OF NO. 16 AWG ENAMEL WIRE ON Ø0.25", CLOSE WOUND
R1,R2	RESISTOR 2.7K OHMS 0.25 WATT
Q1	DU28120T
BOARD	FR4 0.062"