

RP135

Typical Insertion Loss, dB (50/50ohm)

Mechanical Dimensions

1 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	40	50	50	45	40
DM(dB)	15	26	45	50	50

3 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	30	42	50	55	35
DM(dB)	18	30	40	55	50

6 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	36	55	40
DM(dB)	15	26	32	55	40


10/16 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	18	25	40	55	45
DM(dB)	15	25	40	65	50

20 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	24	38	45	50	50
DM(dB)	42	60	65	60	50


30/60 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	40	45	50
DM(dB)	38	70	70	55	60

100/150/180/200 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	40	45	50
DM(dB)	40	60	65	70	65


1/3/6/10 Amp

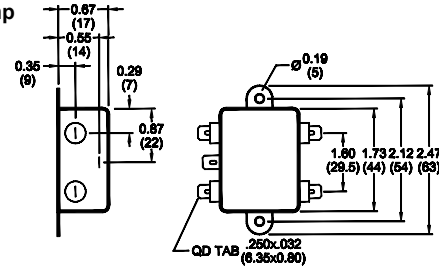


16 Amp

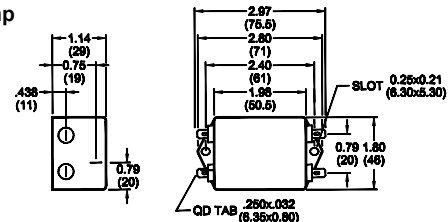


20 Amp

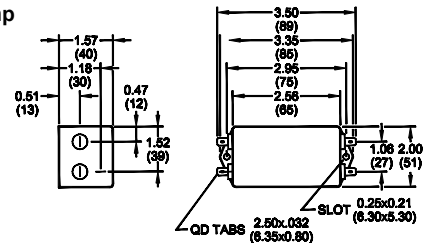


30 Amp

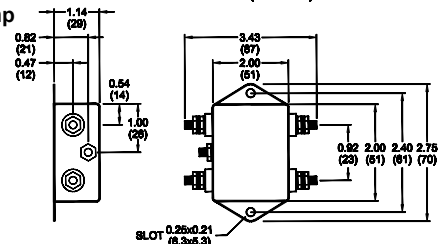

60 Amp

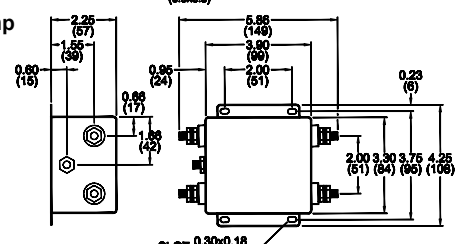

100/150/180/
200 Amp

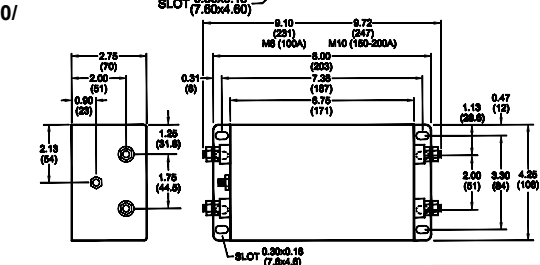

TYPICAL TOLERANCE: +/-0.02 (0.50)

www.radiuspower.com

Reference purposes only.
Specifications are subject to change.
Consult factory to verify specifications.