



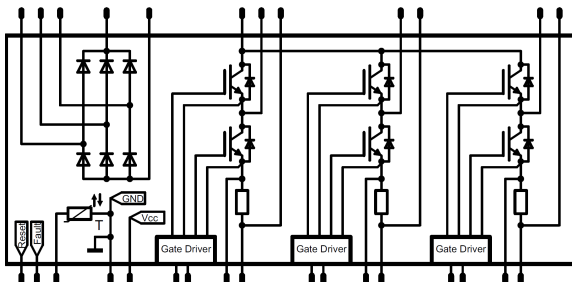

Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
 target datasheet

<i>flow</i> IPM 1B (CI)	1200 V / 8 A
Features Power • 3 Phase Inverter • 3 Phase Input Rectifier • Open Emitter or Emitter Shunt Gate Driver • Bootstrap circuit • Overcurrent protection • Undervoltage lockout NTC • Temperature sensor	flow 1B 17mm housing   Solder pin variation Press-fit pin variation
Target applications • Industrial motor drive • Embedded Drive (fan, pump, compressor, etc.)	Schematic 
Types • 20-1B12IPA008SC-L239C09 • 20-PB12IPA008SC-L239C09Y	

Maximum Ratings

$T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current	I_C	$T_j = T_{jmax}$ $T_S = 80^\circ\text{C}$	9	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	24	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_S = 80^\circ\text{C}$	24	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum Junction Temperature	T_{jmax}		175	$^\circ\text{C}$



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
 target datasheet

Parameter	Symbol	Conditions	Value	Unit
Inverter Diode				
Peak Repetitive Reverse Voltage	V_{RRM}		1200	V
Continuous (direct) forward current	I_F	$T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	8	A
Repetitive peak forward current	I_{FRM}		15	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	13	W
Maximum Junction Temperature	T_{jmax}		150	$^\circ\text{C}$

Parameter	Symbol	Conditions	Value	Unit
Gate driver				
Supply voltage	V_{CC}		24	V
Logic input voltage	V_{in}	U-HIN, U-LIN, V-HIN, V-LIN, W-HIN, W-LIN FAULT, RESET	$-0,5 \dots V_{CC} + 0,5$	V
Junction Temperature	T_{jmax}		125	$^\circ\text{C}$

Parameter	Symbol	Conditions	Value	Unit
Inverter Shunt				
Max DC current	I_{MAX}		tbd	A
Power dissipation	P_{tot}	$T_c = 70^\circ\text{C}$	tbd	W

Parameter	Symbol	Conditions	Value	Unit
Rectifier Diode				
Peak Repetitive Reverse Voltage	V_{RRM}		1600	V
Continuous (direct) forward current	I_F	$T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	15	A
Surge (non-repetitive) forward current	I_{FSM}	50 Hz Single Half Sine Wave $t_p = 10 \text{ ms}$ 50 Hz sine $T_j = 45^\circ\text{C}$	150	A
Surge current capability	$I^2 t$		110	A^2s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	17	W
Maximum Junction Temperature	T_{jmax}		150	$^\circ\text{C}$



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
target datasheet

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation Junction Temperature	T_{jop}		-40...+(T_{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC voltage	$t_p=2s$	4000	V
Creepage distance				min 12,7	mm
Clearance				min 12,7	mm
Comparative Tracking Index	CTI			>200	



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
 target datasheet

Characteristic Values

Inverter Switch

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max	

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=V_{CE}$			0,0005	25 125	5,3	5,8	6,3	V
Collector-emitter saturation voltage	V_{CEsat}		15		8	25 125 150	1,58	1,85 -	2,07	V
Collector-emitter cut-off current	I_{CES}		0	1200		25 125			1	μA
Gate-emitter leakage current	I_{GES}		20	0		25 125			120	nA
Internal gate resistance	r_g							none		Ω
Input capacitance	C_{ies}	f=1 MHz	0	25		25		490		pF
Reverse transfer capacitance	C_{res}							30		

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	Phase-Change Material $\lambda=3,4W/mK$						3,88		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Inverter Diode

Parameter	Symbol	Conditions					Value			Unit
				V_r [V]	I_F [A]	T_j [°C]	Min	Typ	Max	

Static

Forward voltage	V_F				7,5	25 125 150		1,65 1,61 -		V
Reverse leakage current	I_r			1200		25 150			250 -	μA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	Phase-Change Material $\lambda=3,4W/mK$						5,25		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
 target datasheet

Gate driver

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	

Static

Recommended supply voltage	V_{CC}		13,5	15	20	V
Power on reset trip voltage	V_{POR}		4,0	5,5	7,5	V
Internal current limit	I_{MAX}		13,3	16,7	20	A
Quiescent supply current	I_q			3	4,5	mA
Logic "1" input threshold voltage	V_{inH}	U-HIN, U-LIN, V-HIN, V-LIN, W-HIN, W-LIN, RESET	2,2	3	4	V
Logic "0" input threshold voltage	V_{inL}		0,6	1,5	2,1	V
Logic "1" input current	I_{inH}	$V_{in}=5V$	0,6	1	1,4	mA
Logic "0" input current	I_{inL}	$V_{in}=0V$	0	0	0,01	mA
Input signal filter time	t_{Filt}	U-HIN, U-LIN, V-HIN, V-LIN, W-HIN, W-LIN, FAULT(in), RESET(pulse)	80	200	500	ns
Logic "1" FAULT output*	$V_{outFAULTH}$				0,95	V
Logic "1" FAULT input threshold voltage*	$V_{inFAULTH}$		0,6	1,5	2,1	V
Logic "0" FAULT input threshold voltage*	$V_{inFAULTL}$		2,2	3	4	V
Under voltage reset voltage	$V_{UVreset}$		10	10,8	11,6	V
Under voltage trip voltage	V_{UVtrip}		10,5	11,3	12,1	V
Under voltage hysteresis voltage	$V_{UVhysteresis}$		0,2	0,5	0,8	V
Under voltage filter time	t_{UVfilt}		4	8	16	μs
Internal dead time	t_{UVfilt}	Delay matching, high side turn-on and low side turn off	-100	80	300	ns
Internal dead time	t_{UVfilt}	Delay matching, low side turn-on and high side turn off	-20	180	400	ns

*FAULT pin is inverse logic with open drain output
 for more information see Mitsubishi's M81738FP preliminary (Jan 2012) datasheet

Inverter Shunt

Parameter	Symbol	Conditions					Value			Unit
						$T_j [^{\circ}C]$	Min	Typ	Max	

Static

Resistance	R					25		30		m Ω
------------	-----	--	--	--	--	----	--	----	--	------------



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
 target datasheet

Rectifier diode

Parameter	Symbol	Conditions					Value			Unit
				V_r [V]	I_F [A]	T_j [°C]	Min	Typ	Max	

Static

Forward voltage	V_F				7	25 125 150		1,04 0,97 -	1,14	V
Reverse leakage current	I_r			1600		25 150			20 -	μA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	Phase-Change Material $\lambda=3,4\text{W/mK}$						4,03		K/W
-------------------------------------	---------------	--	--	--	--	--	--	------	--	-----

Thermistor

Parameter	Symbol	Conditions					Value			Unit
				V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max

Rated resistance	R						25		22		kΩ
Deviation of R100	$\Delta_{R/R}$	R100=1486 Ω					100	-12		+12	%
Power dissipation	P						25		200		mW
Power dissipation constant							25		2		mW/K
B-value	$B_{(25/50)}$	Tol. ±3%					25		3950		K
B-value	$B_{(25/100)}$	Tol. ±3%					25		3998		K
Vincotech NTC Reference										B	



Vincotech

20-1B12IPA008SC-L239C09 20-PB12IPA008SC-L239C09Y

target datasheet

Ordering Code & Marking							
Version	Ordering Code		in DataMatrix as		in packaging barcode as		
without thermal paste 17mm housing	20-1B12IPA008SC-L239C09		L239C09		L239C09		
w/o thermal paste with Press-fit pin 17mm housing	20-PB12IPA008SC-L239C09Y		L239C09Y		L239C09Y		
NN-NNNNNNNNNN NNNN-TTTTTTVV Vinco LLLLL WWYY SSSS UL 	Text	Name		Type&Ver	Date code	Vinco&Lot	Serial&UL
		NN-NNNNNNNNNNNNNN		TTTTTTTVV	WWYY	Vinco LLLLL	SSSS UL
	Datamatrix	Type&Ver	Lot number	Serial	Date code		
		TTTTTTTVV	LLLLL	SSSS	WWYY		

Outline

Pin table [mm]


Pin	X	Y	Function
1	45,1	0	W-HIN
2	42,4	0	W-LIN
3	39,7	0	RW+
4	37	0	RW-
5	34,3	0	GND
6	31,6	0	VCC
7	28,9	0	V-HIN
8	26,2	0	V-LIN
9	23,5	0	RV+
10	20,8	0	RV-
11	18,1	0	U-HIN
12	15,4	0	U-LIN
13	12,7	0	RU+
14	10	0	RU-
15	7,3	0	RESET
16	4,6	0	FAULT
17	1,9	0	NTC
18	0	8,8	L3
19	0	17,8	L2
20	3,8	26,1	L1
21	7,8	13,3	EU
22	9	18,7	DC1-
23	14,2	26,1	DC1+
24	20,6	17,8	EV
25	24,7	26,1	U
26	28,7	21,6	DC2+
27	36,2	16,7	EW
28	37,5	26,1	V
29	45,1	21,9	W

Pin Descriptions				
Pin	Function	Description	Power pin descriptions	
1	W-HIN	Signal input for high-side W phase	Pin	Function
2	W-LIN	Signal input for low-side W phase	18	L3
3	RW+	W phase shunt +	19	L2
4	RW-	W phase shunt -	20	L1
5	GND	Signal ground	21	EU
6	VCC	Driver circuit supply voltage	22	DC1-
7	V-HIN	Signal input for high-side V phase	23	DC1+
8	V-LIN	Signal input for low-side V phase	24	EV
9	RV+	V phase shunt +	25	U
10	RV-	V phase shunt -	26	DC2+
11	U-HIN	Signal input for high-side U phase	27	EW
12	U-LIN	Signal input for low-side U phase	28	V
13	RU+	U phase shunt +	29	W
14	RU-	U phase shunt -		
15	RESET	Fault latch reset (min. 500ns pulse)		
16	FAULT	Fault latch input/output (negative logic, open drain)		
17	NTC	Temperature sensor connector		



Vincotech

20-1B12IPA008SC-L239C09
20-PB12IPA008SC-L239C09Y
target datasheet

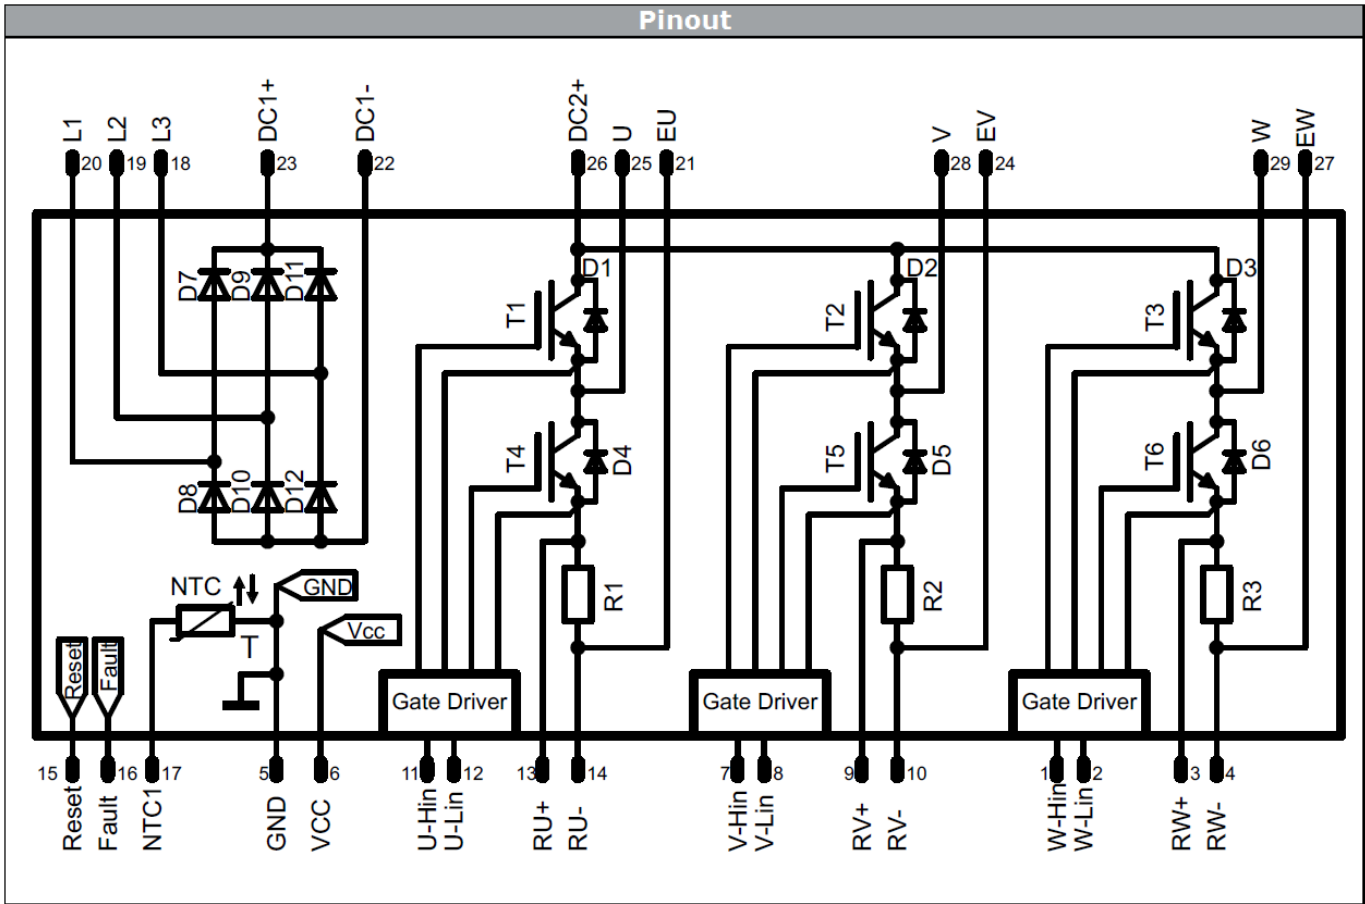

Identification					
ID	Component	Voltage	Current	Function	Comment
T1,T2,T3,T4,T5,T6	IGBT	1200V	8A	Inverter Switch	
D1,D2,D3,D4,D5,D6	FWD	1200V	7,5A	Inverter Diode	
D7,D8,D9,D10,D11,D12	Rectifier	1600V	12A	Boost Inverse Diode	
R1,R2,R3	Resistor	-	-	Inverter Shunt	
NTC	NTC	-	-	Thermistor	



Packaging instruction			
Standard packaging quantity (SPQ)	100	>SPQ	Standard
		<SPQ	Sample
Handling instruction			
Handling instructions for <i>flow</i> 1B packages see vincotech.com website.			

Document No.:	Date:	Modification:	Pages
20-1B12IPA008SC-L239C09 -T2-14	22 May. 2015	Press-fit variation	1, 7

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.