

POWER DIVIDERS, RESISTIVE

SMA, up to 18 GHz, 1 Watt

SPECIFICATIONS:

Models: 6014-01, 6014-02 & 6014-03

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ See Below
Standard Freq. Values _____ 6, 12.4 and 18 GHz
Input VSWR _____ See Below
Impedance _____ 50 Ohms
Insertion Loss _____ See Below
Phase Tracking _____ See Below
Input Power _____ 1 Watt Avg. @ 25°C
Derated Linearly to 0 Watts @ +125°C
Operating Temp Range _____ -65°C to +125°C

Mechanical:

SMA Connectors _____ Passivated Stainless Steel
Mate IAW MIL-STD-348
Housing _____ Passivated Stainless Steel
Conductors _____ Gold Plated Beryllium Copper

Model Number: 6014-01


Frequency Range _____ DC - 12.4 GHz
Input VSWR _____ 1.20:1 Max.
Insertion Loss _____ 6dB Nominal
Phase Tracking _____ $\pm 2^\circ$
(between output ports)
Amplitude Tracking _____ 0.4dB

Model Number: 6014-02

Frequency Range _____ DC - 18 GHz
Input VSWR _____ 1.30:1 Max.
Insertion Loss _____ 7.5dB Nominal
Phase Tracking _____ $\pm 3^\circ$
(between output ports)
Amplitude Tracking _____ 0.5dB

Model Number: 6014-03

Frequency Range _____ DC - 6 GHz
Input VSWR _____ 1.20:1 Max.
Insertion Loss _____ 6dB Nominal
Phase Tracking _____ $\pm 2^\circ$
(between output ports)
Amplitude Tracking _____ 0.4dB

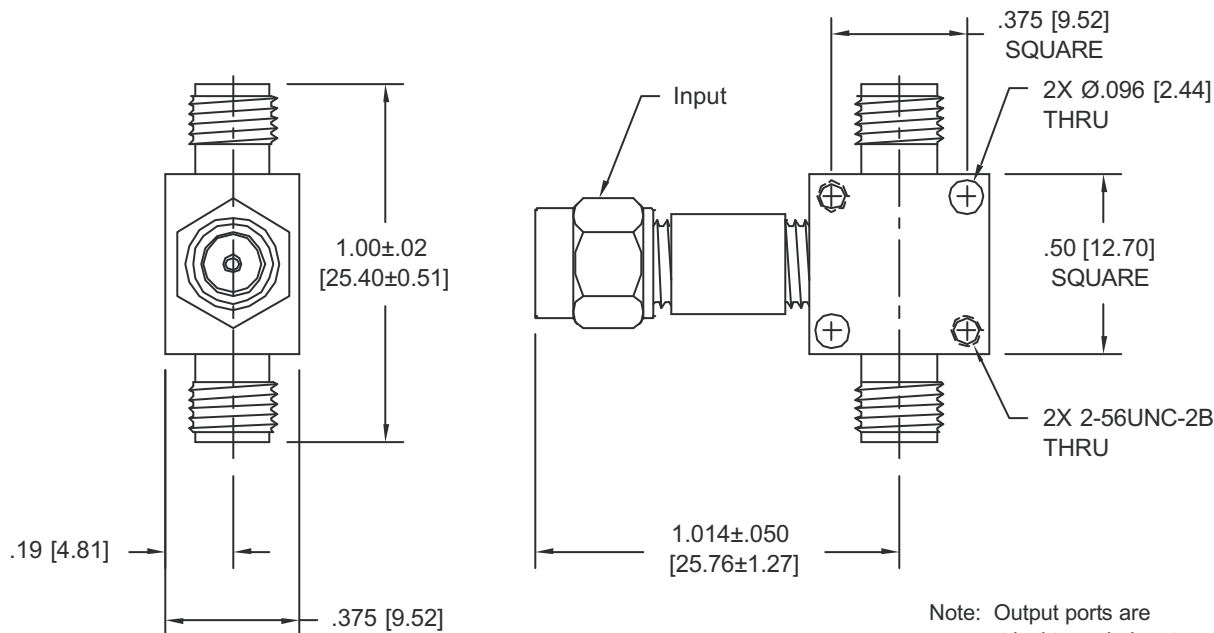

Note: Output ports are symmetrical to male input.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

6014: REV E

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com