

Solid State Broadband High Power Amplifier

1100 – BBM2E4AJP
20 – 1000 MHz, 80 Watts

The BBM2E4AJP (SKU 1100) is suitable for ultra broadband or band specific high power linear applications. This amplifier utilizes silicon LDMOS power devices that provide high gain, wide dynamic range, low distortion and good linearity. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



- Solid-state Class AB linear design
- Extremely wide instantaneous bandwidth
- Compact and lightweight
- Built-in control, monitoring and protection circuits
- Suitable for CW, AM and FM (Consult factory for other modulation types)
- 50 ohm input and output impedance
- Highly rugged and reliable

RoHS Compliant available
SKU# 1100-0006

ELECTRICAL SPECIFICATIONS @ +28.0V_{DC}, 25 °C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		1000	MHz
Output Power CW	P _{SAT}	80			Watt
Output Power @ 1dB Gain Compression	P _{1dB}	50			Watt
Small Signal Gain	G _{1dB}	49	52	55	dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Small Signal Gain Flatness	ΔG			±1.5	dB
Gain Adjustment Range	VVA	25	30		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ Max Gain	NF			10	dB
Third Order Intercept Point	IP3		+53		dBm
2-Tone @ 43dBm/Tone, 1MHz Spacing					
Harmonics @ P _{OUT} = 50W	2 nd / 3 rd		-40 / -20		dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage	V _{DC}	26	28	30	Volt
Current Consumption @ P _{OUT} = 80W	I _{DD}			9.5	Amp
Quiescent Current	I _{DQ}		6.2	6.5	Amp
Switching Time (10% to 90%)	T _{SW}		2	5	μs

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	6.4 x 3.4 x 1.1	Inch	Max
Weight	1.0	lb.	Max
RF Connectors Input/Output	Type-SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _C	-40		+85	°C
Storage Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock					
MIL-STD-810F - Method 514.5/516.5 – Proc I	VII/SH		Airborne		

Solid State Broadband High Power Amplifier

1100 – BBM2E4AJP
20 – 1000 MHz, 80 Watts


LIMITS

Input RF drive level without damage	+10 dBm	Max
Load VSWR @ $P_{OUT} = 80W$	∞ @ any angle & amplitude for duration of 1 minute 3:1 @ any angle & amplitude continuous	-
Thermal Overload	Graceful degradation	-

DC INTERFACE CONNECTOR – D-Sub 9-Pin, Male

Pin #	Description	Specifications
1	N/C	No Connection
2	Current Monitor	Analog voltage relative to I_{DD} @ 50mV/100mA
3	Temp Sensor	Analog voltage relative to module's temperature @ 10mV/°C
4	VVA	Analog Control level: 0 – 5Volts Maximum Gain: 0V _{DC} , Minimum Gain: 5V _{DC}
5	Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)
6, 7	VDD	+28.0V _{DC} ±2.0V
8, 9	GND	Ground

OUTLINE DRAWING

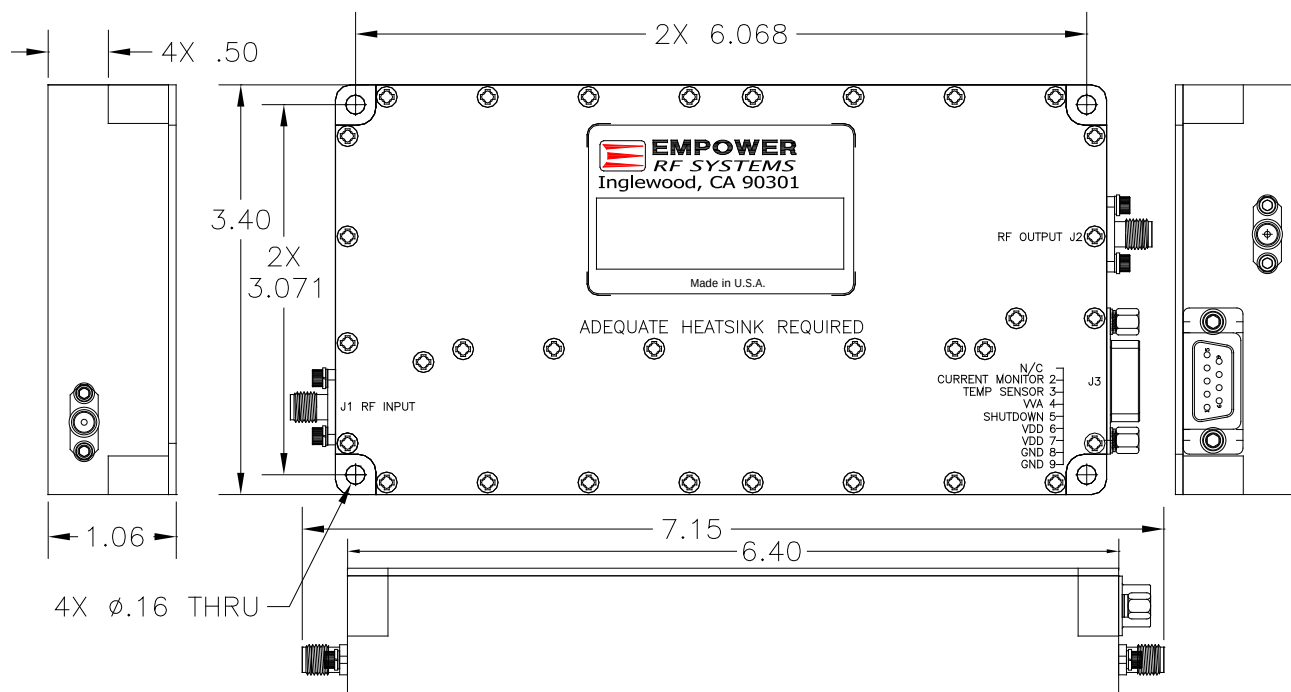

Features:

- Fast-switching Shutdown function
- Reverse polarity protection
- Over-temperature protection
- Temperature indication
- High-temp graceful degradation
- Current limit protection
- Current consumption indication

Solid State Broadband High Power Amplifier

1100 – BBM2E4AJP

20 – 1000 MHz, 80 Watts

TYPICAL PERFORMANCE PLOTS

Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -4.4dBm$ (**Note 2**)
 Reference: 50dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.



Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 0dBm$ (**Note 2**)
 Reference: 50dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.



Plot 3 – Gain Adjustment Range

Top Curve: Max. Gain @ $V_{A_{CTRL}} = 0V$, $P_{IN} = -20dBm$
 Middle Curve: Min. Gain @ $V_{A_{CTRL}} = 5V$, $P_{IN} = -20dBm$
 Reference: 20dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.



Blank