

FEATURES

- WCDMA Compliant
 - Band 2
 - 45% @ $P_{OUT} = +28.6$ dBm
 - 41% @ $P_{OUT} = +17$ dBm (without DC/DC converter)
 - Band 5
 - 44% @ $P_{OUT} = +28.5$ dBm
 - 41% @ $P_{OUT} = +17$ dBm (without DC/DC converter)
- Low Quiescent Current: 6 mA
- Low Leakage Current in Shutdown Mode: 6 μ A
- Internal Voltage Regulator
- Integrated “daisy chainable” directional coupler with CPL_{IN} and CPL_{OUT} port
- Internal DC block on IN/OUT RF ports
- Suitable for SMPS and average power tracking systems with variable supply voltages
- No degradation in efficiency when switching to low power mode
- 1.8 V Control Logic
- RoHS Compliant Package, 260 °C MSL-3

APPLICATIONS

- Dual-band Wireless Handsets and Data Devices for WCDMA and CDMA/EVDO networks:
 - UMTS Band 5, 19
 - UMTS Band 2, 25
 - Cellular BC 0 and 10
 - PCS BC 1 and 14G

PRODUCT DESCRIPTION

AWT6755 addresses the demand for increased integration in dual-band handsets for WCDMA and CDMA/EVDO networks. The small footprint 3 mm x 4 mm x 0.92 mm surface mount RoHS compliant package contains independent RF PA paths to provide optimized performance in each frequency band in 1/3 less PCB area of two single-band PAs. The AWT6755 is part of ANADIGICS' ProEfficient Plus™ family of power amplifiers, which deliver low quiescent currents and excellent efficiency from fixed or variable

supply voltages. Two selectable bias modes optimize efficiency for different ranges of output power levels in average power tracking systems to improve device use time. The AWT6755 is designed for use both with and without average power tracking (APT). APT can be used to optimize the V_{CC} level for the desired output power level and linearity, which greatly reduces the total current drawn from the battery. This feature, in conjunction with HPM and LPM operating modes, enables significant improvements in overall power added efficiency of the AWT6755 across the entire dynamic range of operating powers. APT requires use of an external variable voltage supply (DC-DC converter), which is used to provide the variable voltage to V_{CC} pad of the amplifier. In some cases, the average current over the TS.09 power profile can be reduced by more than 25%. A low-leakage shutdown mode increases standby time.

The AWT6755 has built-in daisy-chainable RF couplers for each band, which provide high directivity and 20 dB coupling. The AWT6755 also incorporates matching networks optimized for output power, efficiency and linearity in a 50 Ω system. The device is designed for use in systems where a single RF input may be switched to drive band 2 and 5 antenna outputs. AWT6755 is manufactured on an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and ruggedness.

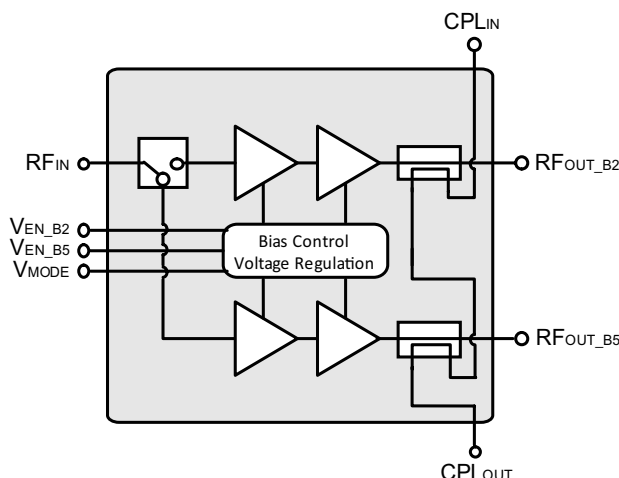


Figure 1: Functional Block Diagram

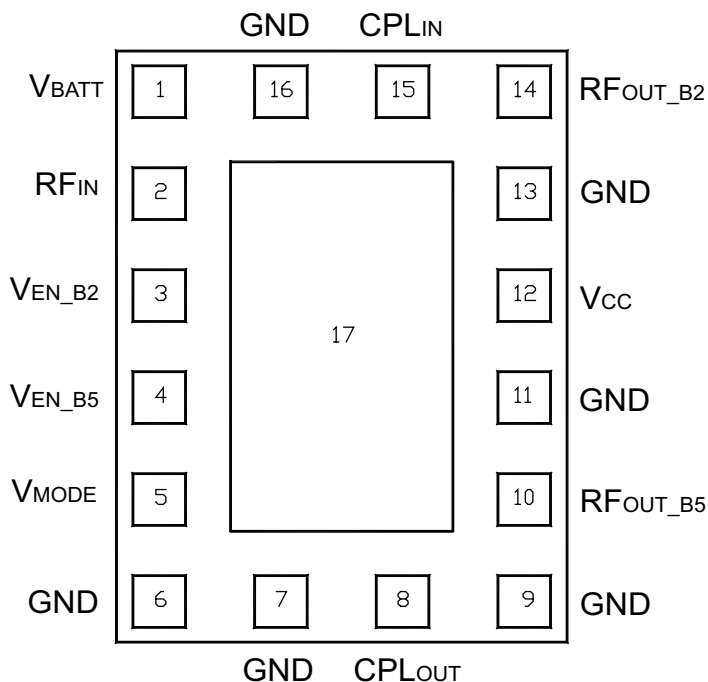


Figure 2: Pinout

Table 1: Pin Description

Pin #	Symbol	Description
1	VBATT	PA Bias/Control Supply Voltage
2	RFIN	RF TX Input Signal
3	VEN_B2	Band 2 PA Enable Pin
4	VEN_B5	Band 5 PA Enable Pin
5	VMODE	Mode Select
6	GND	Ground
7	GND	Ground
8	CPL_OUT	Coupler Output
9	GND	Ground
10	RFOUT_B5	Band 5 PA Output
11	GND	Ground
12	VCC	PA Supply Voltage
13	GND	Ground
14	RFOUT_B2	Band 2 PA Output
15	CPL_IN	Coupler Input
16	GND	Ground
17	GND PADDLE	Ground

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	TYP	MAX	UNIT
Supply Voltage (V _{CC})	-1.2	3.4	+5	V
Battery Voltage (V _{BATT})	-1.2	3.4	+6	V
Control Voltage (V _{MODE})	0	0	+3.5	V
RF Input Power	-	+1	+10	dBm
Storage Temperature	-40	+25	+150	°C

Functional operation to the specified performance is not implied under these conditions. Operation of any single parameter in excess of the absolute ratings may cause permanent damage. No damage occurs if one parameter is set at the limit while all other parameters are set within normal operating ranges.

Table 3: Operating Ranges (Band 2 & 25, BC1 & 14G)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency (f)	1850	-	1915	MHz	
Supply Voltage (V _{CC})	+0.6	+3.4	+4.4	V	P _{OUT} ≤ +28.6 dBm
Battery Voltage (V _{BATT})	+3.1	+3.4	+4.4	V	P _{OUT} ≤ +28.6 dBm
Enable Voltage (V _{EN_B2})	+1.35 0	+1.8 -	+3.1 +0.5	V	PA "on" PA "shut down"
Mode Control Voltage (V _{MODE})	0 +1.35	- +1.8	+0.5 +3.1	V	High Bias Mode Low Bias Mode
UMTS Band 2 Output Power ⁽¹⁾ R99 (HPM) HSPA (MPR = 0), HPM R99 (LPM) HSPA (MPR = 0), LPM	27.8 26.8 16.2 15.2	28.6 27.6 17 16	- - - -	dBm	3GPP TS 34.121-1 Rel 8 Table c 11.1.3, SUBTEST 1
CDMA Output Power ⁽¹⁾ HPM LPM	27 15.2	27.8 16	- -	dBm	CDMA2000, RC-1 CDMA2000, RC-1
Case Temperature (T _C)	-30	-	+90	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

(1) P_{OUT} derated 0.8 dB for 3.1 V operation.

Table 4: Electrical Specifications - WCDMA Operation (Band 2 & 25) (R99 waveform)
(T_C = +25 °C, V_{BATT} = V_{CC} = +3.4 V, V_{EN} = +1.8 V, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
					P _{OUT}	V _{MODE}
Gain	24 13.5	27.5 16	31 19	dB	+28.6 dBm +17 dBm	0 V 1.8 V
ACLR1 at 5 MHz offset ⁽¹⁾	- -	-40 -42	-36 -36	dBc	+28.6 dBm +17 dBm	0 V 1.8 V
ACLR2 at 10 MHz offset ⁽¹⁾	- -	-52 -55	-48 -48	dBc	+28.6 dBm +17 dBm	0 V 1.8 V
Efficiency ⁽¹⁾	38 36	45 41	- -	%	+28.6 dBm +17 dBm	0 V 1.8 V
Quiescent Current (I _{cq}) Low Bias Mode	-	6	-	mA	through V _{CC} pin	1.8 V
Mode Control Current	-	0.1	0.25	mA	through V _{MODE} pins, V _{MODE} = +1.8 V	
Enable Current	-	0.04	0.1	mA	through V _{EN} pin	
BATT Current	-	0.80	2.0	mA	through V _{BATT} , V _{MODE} = +1.8 V	
Leakage Current	-	6	15	μA	V _{BATT} = +4.4 V, V _{CC} = +4.4 V, V _{EN} = 0 V, V _{MODE} = 0 V	
Noise Power	- - -	-134 -136 -146	- - -	dBm/Hz	Rx Band, 1930 - 1990 MHz GPS Band, 1573 - 1578 MHz ISM Band, 2402 - 2480 MHz P _{OUT} ≤ +28.6 dBm	
Harmonics 2f _o 3f _o , 4f _o	- -	-44 -39	-35 -30	dBc	P _{OUT} ≤ +28.6 dBm	
Coupling Factor	18.5	20.5	22.5	dB		
Directivity	-	20	-	dB		
Daisy Chain Insertion Loss	-	<0.5	0.7	dB	698 - 2620 MHz Pin 15 through 8, shutdown mode	
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	P _{OUT} ≤ +28.6 dBm In-band load VSWR < 5:1 Out-of-band load VSWR < 10:1 Applies over all operating conditions	
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Applies over full operating range	

Notes:

(1) ACLR and Efficiency measured at 1882.5 MHz.

Table 5: Electrical Specifications - CDMA Operation (CDMA2000, RC-1) (BC 1 & 14)
(T_C = +25 °C, V_{CC} = +3.4 V, V_{EN} = +1.8 V, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
					P _{OUT}	V _{MODE}
Gain	24 13.5	27.5 16	31 19	dB	+27.8 dBm +16 dBm	0 V 1.8 V
Adjacent Channel Power at ± 1.25 MHz Primary Channel BW - 1.23 MHz Adjacent Channel BW = 30 kHz	- -	-51 -54	-46 -46	dBc	+27.8 dBm +16 dBm	0 V 1.8 V
Adjacent Channel Power at + 1.98 MHz Primary Channel BW - 1.23 MHz Adjacent Channel BW = 30 kHz	- -	-56 -59	-53 -53	dBc	+27.8 dBm +16 dBm	0 V 1.8 V
Efficiency	- -	40 38	- -	%	+27.8 dBm +16 dBm	0 V 1.8 V
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	P _{OUT} ≤ +27.8 dBm In-band load VSWR < 5:1 Out-of-band load VSWR < 10:1 Applies over all operating conditions	
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Applies over full operating range	

Table 6: Operating Ranges (Band 5 & 19, BC 0 & 10)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency (f)	824 816	- -	849 849	MHz	B5 & 19 BC0 & BC10
Supply Voltage (V _{CC})	+0.6	+3.4	+4.4	V	P _{OUT} ≤ +28.5 dBm
Battery Voltage (V _{BATT})	+3.1	+3.4	+4.4	V	P _{OUT} ≤ +28.5 dBm
Enable Voltage (V _{EN_B5})	+1.35 0	+1.8 -	+3.1 +0.5	V	PA “on” PA “shut down”
Mode Control Voltage (V _{MODE})	0 +1.35	- +1.8	+0.5 +3.1	V	High Bias Mode Low Bias Mode
UMTS Band 5 Output Power ⁽¹⁾ R99 (HPM) HSPA (MPR = 0), HPM R99 (LPM) HSPA (MPR = 0), LPM	27.7 26.6 16.2 15.2	28.5 27.4 17 16	- - - -	dBm	B5 & 19 3GPP TS 34.121-1 Rel 8 Table c 11.1.3 SUBTEST 1
CDMA Output Power ⁽¹⁾ HPM HPM LPM	26.7 26.5 14.7	27.5 27.3 15.5	- - -	dBm	BC0 BC10 CDMA2000, RC-1
Case Temperature (T _c)	-30	-	+90	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

(1) P_{OUT} derated 0.8 dB for 3.1 V operation.

Table 7: Electrical Specifications - WCDMA Operation (R99 waveform) (Band 5)
(T_C = +25 °C, V_{CC} = +3.4 V, V_{EN} = +1.8 V, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
					P _{OUT}	V _{MODE}
Gain	24.5 14.5	27.5 18	30.5 21	dB	+28.5 dBm +17 dBm	0 V 1.8 V
ACLR1 at 5 MHz offset ⁽¹⁾	- -	-40 -39	-36 -35	dBc	+28.5 dBm +17 dBm	0 V 1.8 V
ACLR2 at 10 MHz offset ⁽¹⁾	- -	-55 -53	-48 -48	dBc	+28.5 dBm +17 dBm	0 V 1.8 V
Efficiency ⁽¹⁾	37 34	44 41	- -	%	+28.5 dBm +17 dBm	0 V 1.8 V
Quiescent Current (I _{cq}) Low Bias Mode	-	6	-	mA	through V _{CC} pin	1.8 V
Mode Control Current	-	0.1	0.25	mA	through V _{MODE} pins, V _{MODE} = +1.8 V	
Enable Current	-	0.03	0.1	mA	through V _{EN} pin	
BATT Current	-	0.80	2.0	mA	through V _{BATT} , V _{MODE} = +1.8 V	
Leakage Current	-	6	15	μA	V _{BATT} = +4.4 V, V _{CC} = +4.4 V, V _{EN} = 0 V, V _{MODE} = 0 V	
Noise Power	- - -	-133 -155 -160	- - -	dBm/Hz	Rx Band 869 - 894 MHz GPS Band, 1573 - 1578 MHz ISM Band, 2402 - 2480 MHz P _{OUT} ≤ +28.5 dBm	
Harmonics 2f _o 3f _o , 4f _o	- - -	-44 -51	-35 -35	dBc	P _{OUT} ≤ +28.5 dBm	
Coupling Factor	18.5	20.5	22.5	dB		
Directivity	-	20	-	dB		
Daisy Chain Insertion Loss	-	<0.5	0.7	dB	698 - 2620 MHz Pin 15 through 8, shutdown mode	
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	P _{OUT} ≤ +28.5 dBm In-band load VSWR < 5:1 Out-of-band load VSWR < 10:1 Applies over all operating conditions	
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Applies over full operating range	

Notes:

(1) ACLR and Efficiency measured at 832.5 MHz.

Table 8: Electrical Specifications - CDMA Operation (CDMA2000, RC-1) (BC 0)
(T_C = +25 °C, V_{CC} = +3.4 V, V_{EN} = +1.8 V, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
					P _{OUT}	V _{MODE}
Gain	24.5 14.5	27.5 18	30.5 21	dB	+27.5 dBm +15.5 dBm	0 V 1.8 V
Adjacent Channel Power at ± 0.85 MHz Primary Channel BW - 1.23 MHz Adjacent Channel BW = 30 kHz	- -	-51 -52	-46 -46	dBc	+27.5 dBm +15.5 dBm	0 V 1.8 V
Adjacent Channel Power at + 1.98 MHz Primary Channel BW - 1.23 MHz Adjacent Channel BW = 30 kHz	- -	-60 -59	-56 -56	dBc	+27.5 dBm +15.5 dBm	0 V 1.8 V
Efficiency	- -	39 35	- -	%	+27.5 dBm +15.5 dBm	0 V 1.8 V
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	P _{OUT} ≤ +27.5 dBm In-band load VSWR < 5:1 Out-of-band load VSWR < 10:1 Applies over all operating conditions	
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Applies over full operating range	

APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site: <http://www.anadigics.com>

Shutdown Mode

The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to the V_{ENABLE} and V_{MODE} pads.

Bias Modes

The power amplifier may be placed in either Low or High Bias mode by applying the appropriate logic level

(see Operating Ranges table) to the V_{MODE} pin. The Bias Control table below lists the recommended modes of operation for various applications.

Two operating modes are recommended to optimize current consumption. High Bias/High Power operating mode is for P_{OUT} levels ≥ 17 dBm. For P_{OUT} levels ≤ 17 dBm, the PA can be switched to Low Power Mode for extremely low current consumption.

Table 9: Bias Control

APPLICATION	P_{OUT} LEVELS	BIAS MODE	V_{EN}	V_{MODE}	V_{CC}	V_{BATT}
Low power (Low Bias Mode)	$< +17$ dBm	Low	+1.8 V	+1.8 V	1.6 - 4.4 V	> 3.1 V
High power (High Bias Mode)	$> +16$ dBm	High	+1.8 V	0 V	0.6 - 4.4 V	> 3.1 V
Shutdown	-	Shutdown	0 V	0 V	0.6 - 4.4 V	> 3.1 V


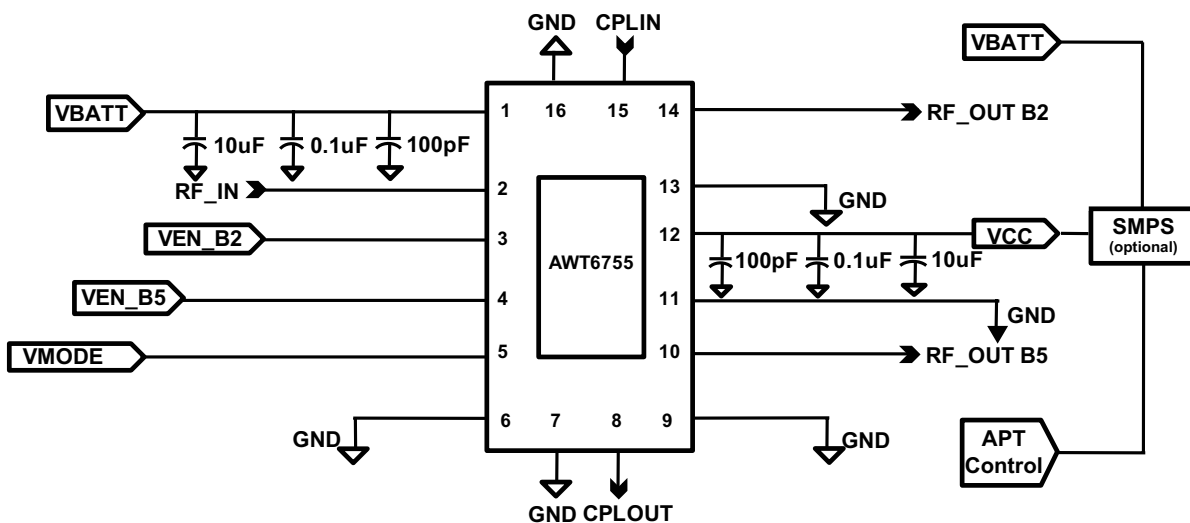


Figure 3: Evaluation Board Schematic

PACKAGE OUTLINE

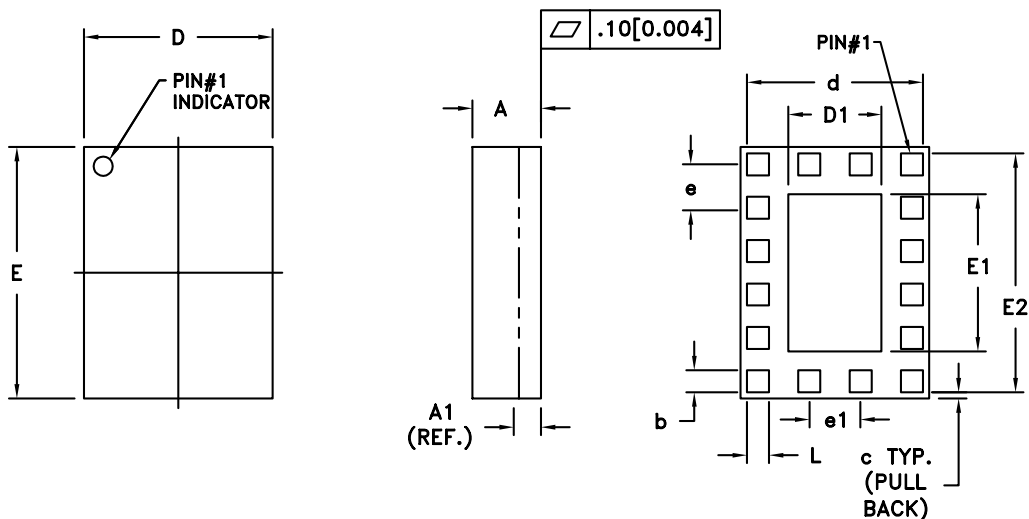

	MILLIMETERS			INCHES			NOTE
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
A	0.85	0.92	1.00	0.033	0.036	0.039	—
A1	PLEASE REFER TO LAMINATE CONTROL DRAWING						—
b	0.30	0.35	0.40	0.012	0.014	0.016	3
c	—	0.10	—	—	0.004	—	—
d	—	2.80	—	—	0.11	—	—
D	2.88	3.00	3.12	0.113	0.118	0.123	—
D1	1.43	1.50	1.65	0.056	0.059	0.065	3
E	3.88	4.00	4.12	0.152	0.157	0.162	—
E1	2.45	2.50	2.55	0.096	0.098	0.10	3
E2	—	3.80	—	—	0.15	—	—
e	—	0.69	—	—	0.027	—	4
e1	—	0.82	—	—	0.032	—	4
L	0.30	0.35	0.40	0.012	0.014	0.016	3

NOTES:

1. CONTROLLING DIMENSIONS IN MILLIMETERS.
2. UNLESS SPECIFIED, TOLERANCE=±0.076[0.003].
3. SIGNAL PADS SHOWN UNIFORM SIZE FOR REFERENCE ONLY. ACTUAL SIZE AND LOCATION WILL VARY WITHIN MIN. AND MAX. DIMENSIONS ACCORDING TO THE PRODUCT DESIGN.
4. GROUND PADS SHOWN UNIFORM SIZE FOR REFERENCE ONLY. ACTUAL SIZE AND LOCATION ARE REFERENCE ONLY.
5. PITCH MEASUREMENTS (e) TAKE CENTERLINE TO CENTERLINE OF SOLDERMASK OPENINGS.
6. UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.
7. LAMINATE CONTROL DRAWING SPECIFIED BY PRODUCT DESIGN.

Figure 4: Outline 16 Pin 3 mm x 4 mm x 0.92 mm Surface Mount Module

TOP BRAND


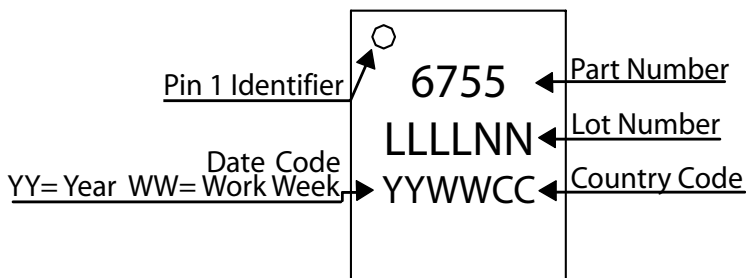


Figure 5: Branding Specification

PCB AND STENCIL DESIGN GUIDELINE

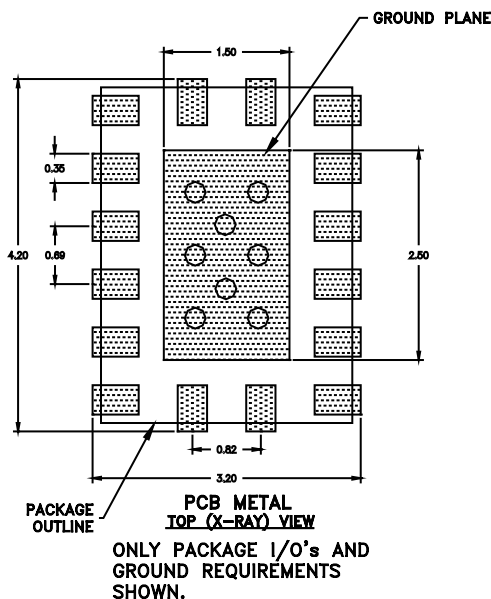

NOTES:

- (1) OUTLINE DRAWING REF: P8002530
- (2) UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.
- (3) DIMENSIONS IN MILLIMETERS.
- (4) VIAS SHOWN IN PCB METAL VIEW ARE FOR REFERENCE ONLY. NUMBER & SIZE OF THERMAL VIAS REQUIRED DEPENDENT ON HEAT DISSIPATION REQUIREMENT AND THE PCB PROCESS CAPABILITY.
- (5) RECOMMENDED STENCIL THICKNESS: APPROX. 0.150mm (6 MILs)



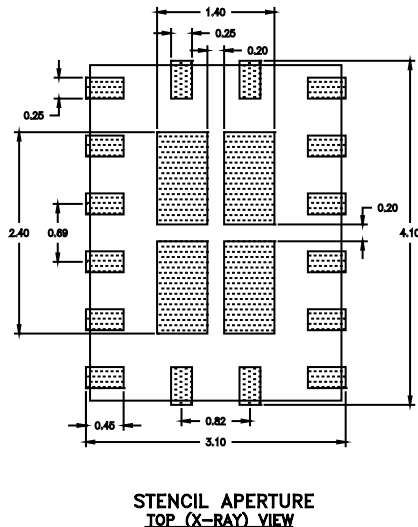



Figure 6: Recommended PCB Layout Information

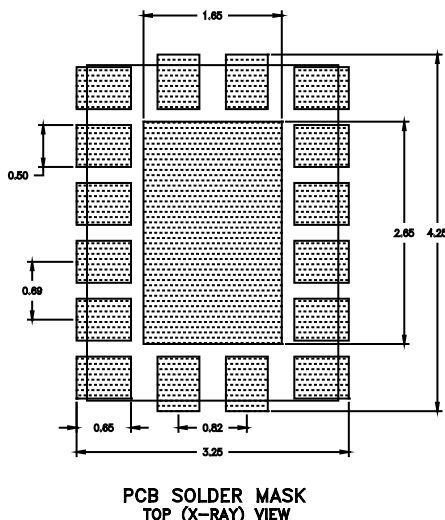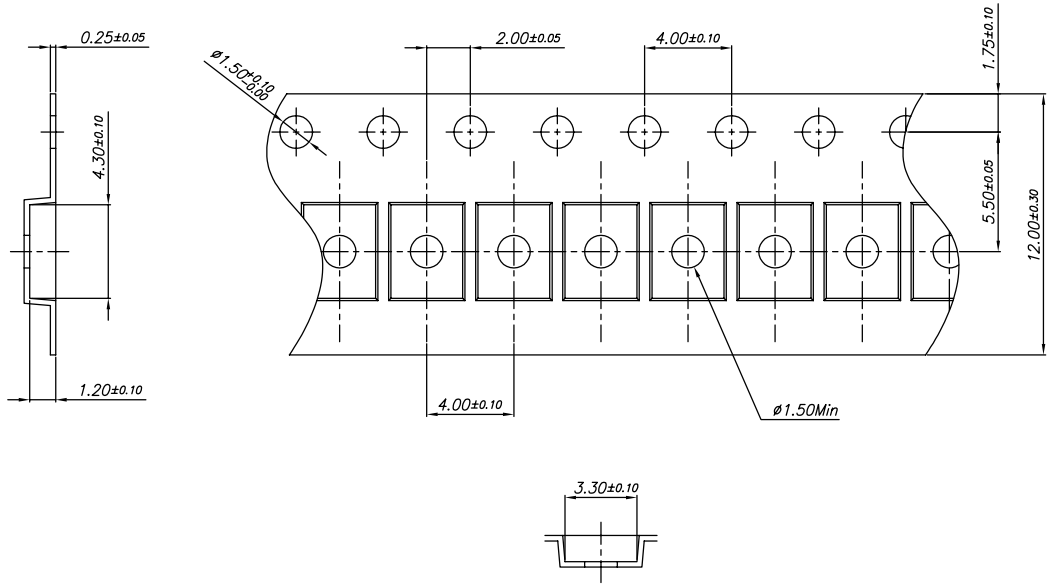

NOTES:

- (1) 10 sprocket hole pitch cumulative tolerance ± 0.2 .
- (2) Camber not to exceed 1 mm in 250 mm.
- (3) Material: Black conductive Polystyrene.
- (4) Ao and Bo measured on a plane 0.3 mm above the bottom of the pocket.
- (5) Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- (6) Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- (7) Pocket center and pocket hole center must be same position.

Figure 7: Carrier Tape

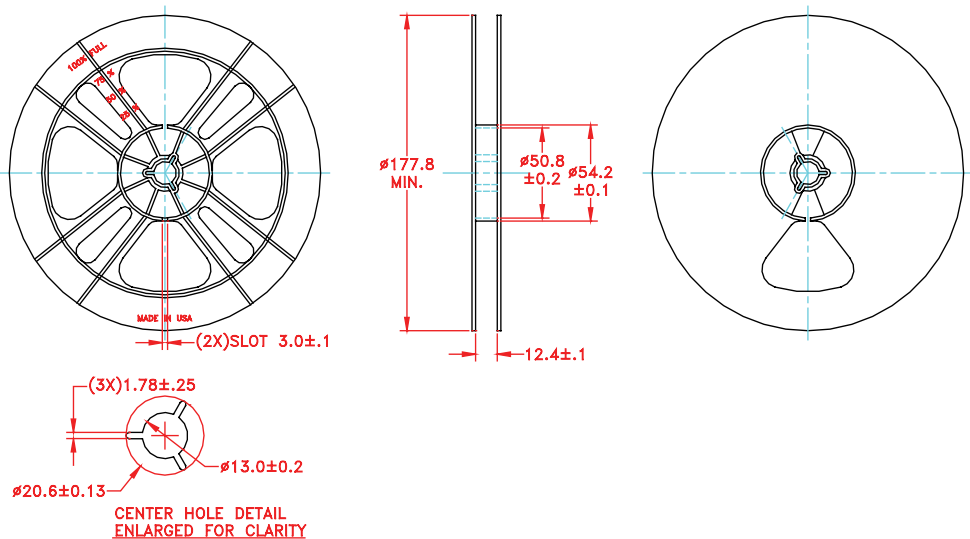

NOTES:

1. MATERIAL: BLACK CARBON POLYSTYRENE
- SURFACE RESISTIVITY: 1×10^4 TO 1×10^6 ohms/square

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

Figure 8: Reel

ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWT6755P7	-30 °C to +90 °C	RoHS Compliant 16 Pin 3 mm x 4 mm x 0.92 mm Surface Mount Module	Bags
AWT6755P9	-30 °C to +90 °C	RoHS Compliant 16 Pin 3 mm x 4 mm x 0.92 mm Surface Mount Module	Partial Tape and Reel
AWT6755Q7	-30 °C to +90 °C	RoHS Compliant 16 Pin 3 mm x 4 mm x 0.92 mm Surface Mount Module	Tape and Reel, 2500 pieces per Reel

**ANADIGICS**

141 Mount Bethel Road
Warren, New Jersey 07059, U.S.A.
Tel: +1 (908) 668-5000
Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.