



SKiM® 93

Trench IGBT Modules

SKiM459GD12E4

Features


- IGBT 4 Trench Gate Technology
- Solderless sinter technology
- $V_{CE(sat)}$ with positive temperature coefficient
- Low inductance case
- Isolated by Al_2O_3 DCB (Direct Copper Bonded) ceramic substrate
- Pressure contact technology for thermal contacts
- Spring contact system to attach driver PCB to the control terminals
- High short circuit capability, self limiting to $6 \times I_C$
- Integrated temperature sensor

Typical Applications*

- Automotive inverter
- High reliability AC inverter wind
- High reliability AC inverter drives

Remarks

- Case temperature limited to $T_s = 125^\circ C$ max; $T_c = T_s$ (for baseplateless modules)
- Recommended $T_{op} = -40 \dots +150^\circ C$

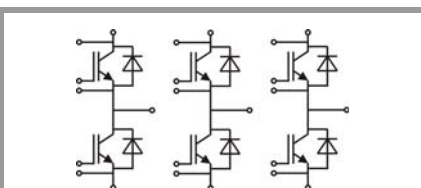

GD

Absolute Maximum Ratings				
Symbol	Conditions		Values	Unit
IGBT				
V _{CES}			1200	V
I _C	T _j = 175 °C	T _s = 25 °C	554	A
		T _s = 70 °C	450	A
I _{Cnom}			450	A
I _{CRM}	I _{CRM} = 3xI _{Cnom}		1350	A
V _{GES}			-20 ... 20	V
t _{psc}	V _{CC} = 800 V V _{GE} ≤ 15 V V _{CES} ≤ 1200 V	T _j = 150 °C	10	μs
T _j			-40 ... 175	°C
Inverse diode				
I _F	T _j = 175 °C	T _s = 25 °C	438	A
		T _s = 70 °C	347	A
I _{Fnom}			450	A
I _{FRM}	I _{FRM} = 3xI _{Fnom}		1350	A
I _{FSM}	t _p = 10 ms, sin 180°, T _j = 25 °C		2430	A
T _j			-40 ... 175	°C
Module				
I _{t(RMS)}	T _{terminal} = 80 °C		700	A
T _{stg}			-40 ... 125	°C
V _{isol}	AC sinus 50 Hz, t = 1 min		2500	V

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
IGBT						
V _{CE(sat)}	I _C = 450 A V _{GE} = 15 V chipelevel	T _j = 25 °C		1.85	2.10	V
		T _j = 150 °C		2.25	2.45	V
V _{CE0}	V _{GE} = 15 V	T _j = 25 °C		0.8	0.9	V
		T _j = 150 °C		0.7	0.8	V
r _{CE}		T _j = 25 °C		2.3	2.7	mΩ
		T _j = 150 °C		3.4	3.7	mΩ
V _{GE(th)}	V _{GE} =V _{CE} , I _C = 18 mA		5	5.8	6.5	V
I _{CES}	V _{GE} = 0 V	T _j = 25 °C		0.1	0.3	mA
	V _{CE} = 1200 V	T _j = 150 °C				mA
C _{ies}	V _{CE} = 25 V V _{GE} = 0 V	f = 1 MHz		26.40		nF
C _{oes}		f = 1 MHz		1.74		nF
C _{res}		f = 1 MHz		1.41		nF
Q _G	V _{GE} = - 8 V...+ 15 V			2550		nC
R _{Gint}	T _j = 25 °C			1.7		Ω
t _{d(on)}	V _{CC} = 600 V I _C = 450 A R _{G on} = 1.3 Ω R _{G off} = 1.3 Ω di/dt _{on} = 8340 A/μs di/dt _{off} = 3660 A/μs	T _j = 150 °C		276		ns
t _r		T _j = 150 °C		55		ns
E _{on}		T _j = 150 °C		22		mJ
t _{d(off)}		T _j = 150 °C		538		ns
t _f		T _j = 150 °C		114		ns
E _{off}		T _j = 150 °C		57		mJ
R _{th(j-s)}	per IGBT				0.092	K/W



SKiM® 93

Trench IGBT Modules

SKiM459GD12E4

Features

- IGBT 4 Trench Gate Technology
- Solderless sinter technology
- $V_{CE(sat)}$ with positive temperature coefficient
- Low inductance case
- Isolated by Al_2O_3 DCB (Direct Copper Bonded) ceramic substrate
- Pressure contact technology for thermal contacts
- Spring contact system to attach driver PCB to the control terminals
- High short circuit capability, self limiting to $6 \times I_C$
- Integrated temperature sensor


Typical Applications*

- Automotive inverter
- High reliability AC inverter wind
- High reliability AC inverter drives

Remarks

- Case temperature limited to $T_s = 125^\circ\text{C}$ max; $T_c = T_s$ (for baseplateless modules)
- Recommended $T_{op} = -40 \dots +150^\circ\text{C}$

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
V _F = V _{EC}	I _F = 450 A V _{GE} = 0 V chiplevel	T _j = 25 °C		2.1	2.5	V
		T _j = 150 °C		2.1	2.4	V
V _{F0}		T _j = 25 °C		1.3	1.5	V
		T _j = 150 °C		0.9	1.1	V
r _F		T _j = 25 °C		1.9	2.1	mΩ
		T _j = 150 °C		2.6	2.8	mΩ
I _{RRM}		I _F = 450 A	T _j = 150 °C		570	A
Q _{rr}		di/dt _{off} = 8880 A/μs	T _j = 150 °C		80	μC
E _{rr}	V _{GE} = -15 V	T _j = 150 °C		40	mJ	
	V _{CC} = 600 V					
R _{th(j-s)}	per diode				0.155	K/W
Module						
L _{CE}				10	15	nH
R _{CC'+EE'}	terminal-chip	T _s = 25 °C		0.3		mΩ
		T _s = 125 °C		0.5		mΩ
w				1042		g
Temperature Sensor						
R ₁₀₀	T _{Sensor} = 100 °C (R ₂₅ = 5 kΩ)			339		Ω
B _{100/125}	R _(T) = R ₁₀₀ exp[B _{100/125} (1/T-1/373)]; T[K];			4096		K

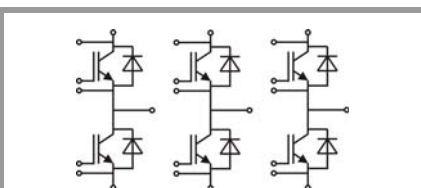

GD

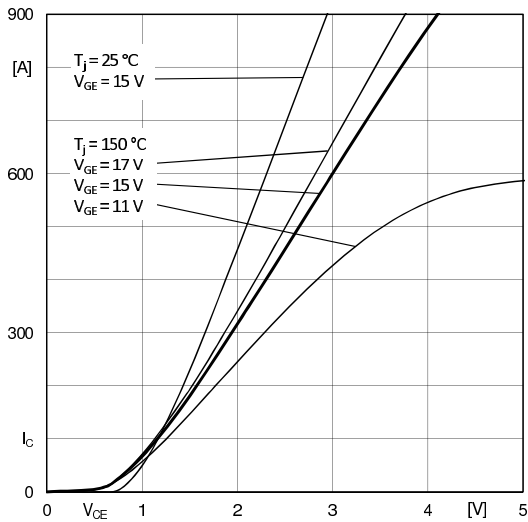


Fig. 1: Typ. output characteristic, inclusive $R_{CC'} + E_{E'}$

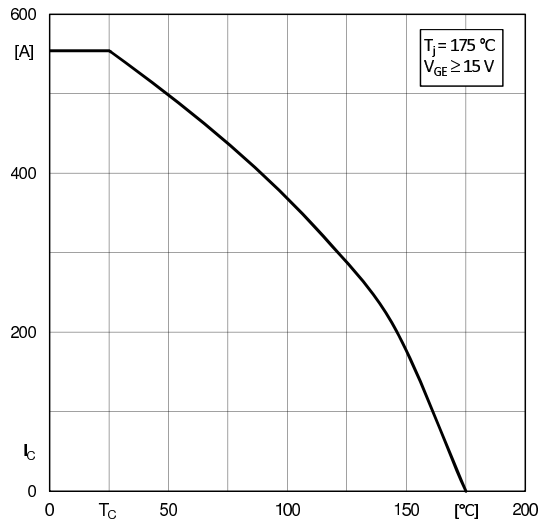


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

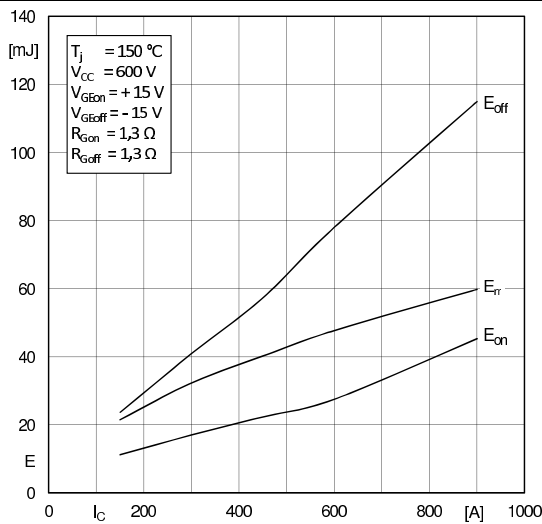


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

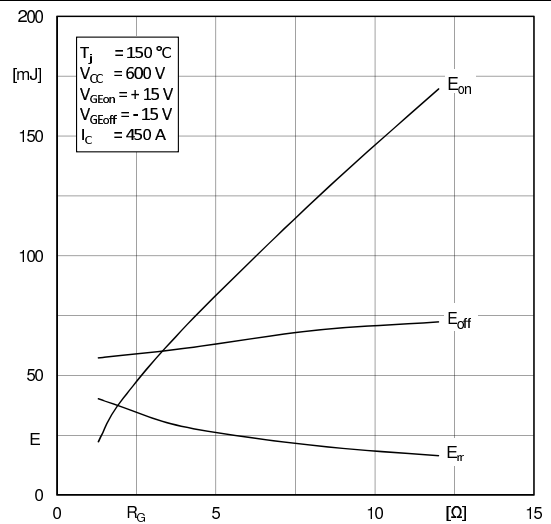


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

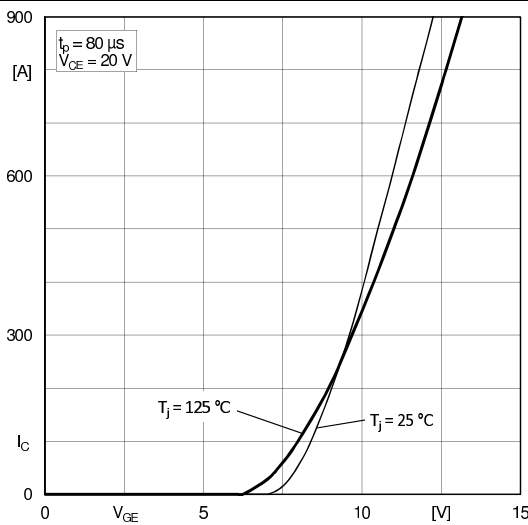


Fig. 5: Typ. transfer characteristic








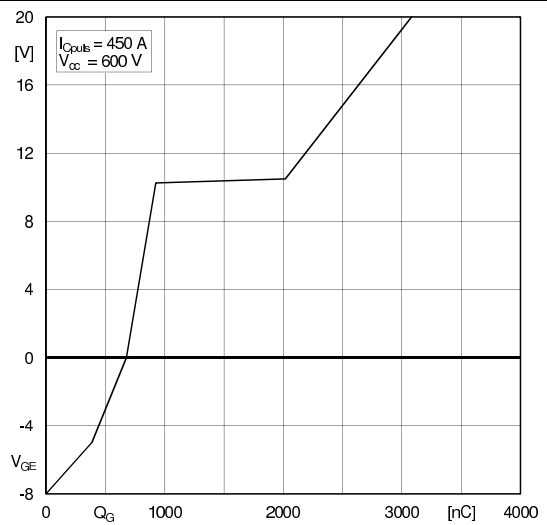


Fig. 6: Typ. gate charge characteristic

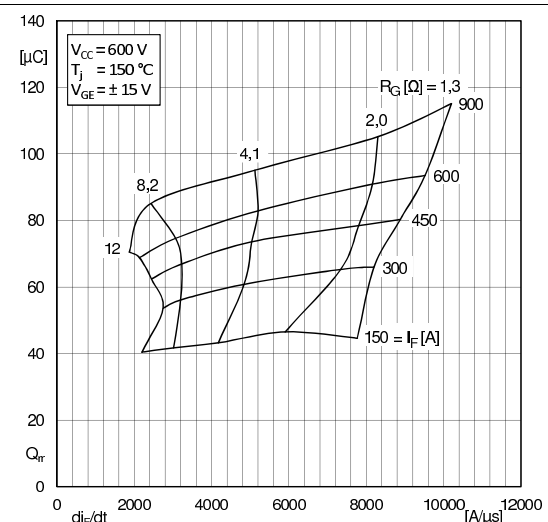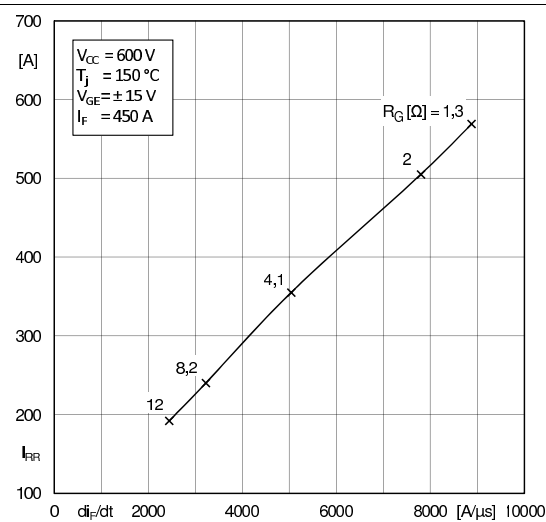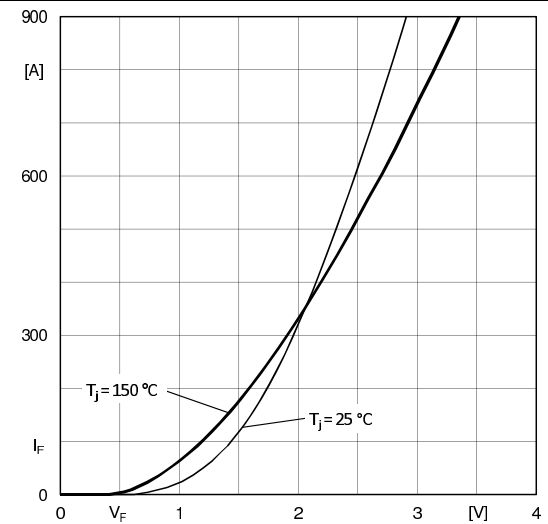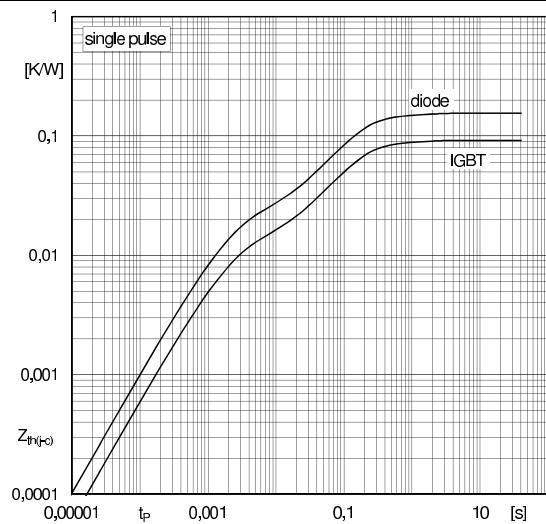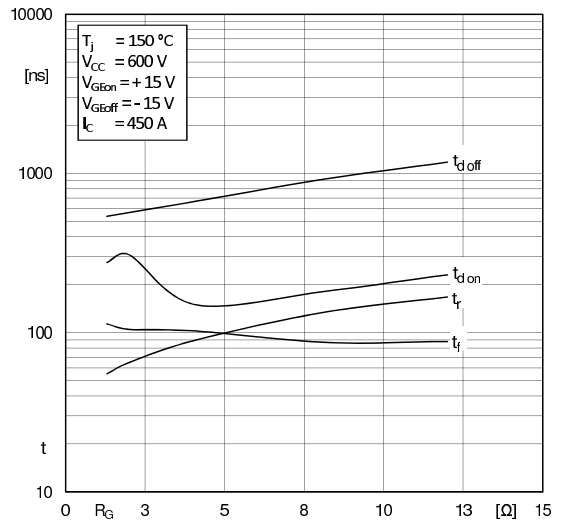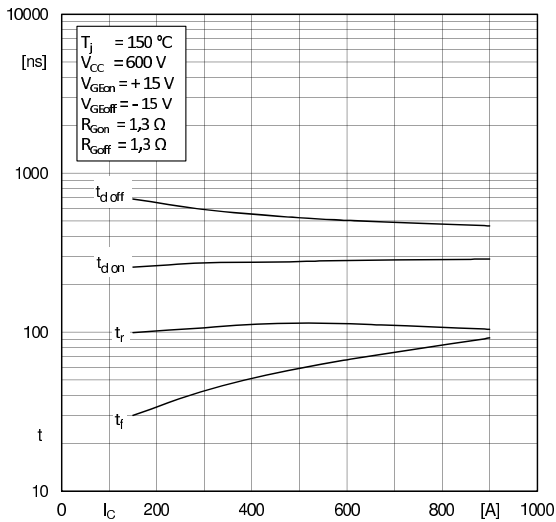

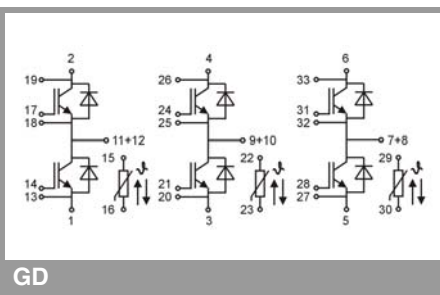

5