


The RF Line NPN Silicon Power Transistor 150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07

Designed primarily for high-voltage applications as a high-power linear amplifier from 2.0 to 30 MHz. Ideal for marine and base station equipment.

- Specified 50 V, 30 MHz Characteristics —
Output power = 150 W (PEP)
Minimum gain = 13 dB
Efficiency = 45%
- Intermodulation distortion @ 150 W (PEP) —
IMD = -32 dB (Max)
- Diffused emitter resistors for superior ruggedness
- 100% tested for load mismatch at all phase angles with 30:1 VSWR @ 150 W CW

Product Image

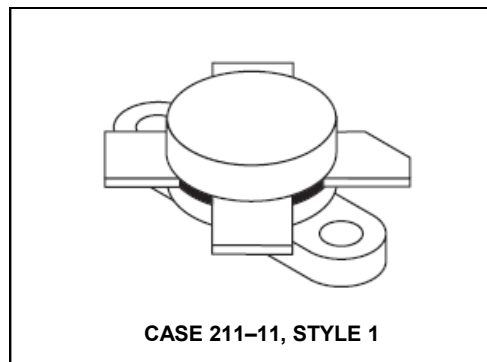

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	50	Vdc
Collector-Base Voltage	V_{CBO}	100	Vdc
Emitter-Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous	I_C	16	Adc
Withstand Current — 10 s	—	20	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	233 1.33	Watts W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.75	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C = 200 \text{ mAdc}$, $I_B = 0$)	$V_{(BR)CEO}$	50	—	—	Vdc
Collector-Emitter Breakdown Voltage ($I_C = 100 \text{ mAdc}$, $V_{BE} = 0$)	$V_{(BR)CES}$	100	—	—	Vdc
Collector-Base Breakdown Voltage ($I_C = 100 \text{ mAdc}$, $I_E = 0$)	$V_{(BR)CBO}$	100	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = 10 \text{ mAdc}$, $I_C = 0$)	$V_{(BR)EBO}$	4.0	—	—	Vdc

(continued)

The RF Line NPN Silicon Power Transistor
150W(PEP), 30MHz, 50V
M/A-COM Products
Released - Rev. 07.07
ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS					
DC Current Gain ($I_C = 5.0 \text{ Adc}$, $V_{CE} = 5.0 \text{ Vdc}$)	h_{FE}	10	30	80	—
DYNAMIC CHARACTERISTICS					
Output Capacitance ($V_{CB} = 50 \text{ Vdc}$, $I_E = 0$, $f = 1.0 \text{ MHz}$)	C_{ob}	—	220	300	pF
FUNCTIONAL TESTS					
Common-Emitter Amplifier Gain ($V_{CC} = 50 \text{ Vdc}$, $P_{out} = 150 \text{ W (PEP)}$, $I_C(\text{max}) = 3.32 \text{ Adc}$, $f = 30$; 30.001 MHz)	G_{PE}	13	15	—	dB
Output Power ($V_{CE} = 50 \text{ Vdc}$, $f = 30$; 30.001 MHz)	P_{out}	150	—	—	W (PEP)
Collector Efficiency ($V_{CC} = 50 \text{ Vdc}$, $P_{out} = 150 \text{ W (PEP)}$, $I_C(\text{max}) = 3.32 \text{ Adc}$, $f = 30$, 30.001 MHz)	η	45	—	—	%
Intermodulation Distortion (1) ($V_{CE} = 50 \text{ Vdc}$, $P_{out} = 150 \text{ W (PEP)}$, $I_C = 3.32 \text{ Adc}$)	IMD	—	-35	-32	dB
Electrical Ruggedness ($V_{CC} = 50 \text{ Vdc}$, $P_{out} = 150 \text{ W CW}$, $f = 30 \text{ MHz}$, VSWR 30:1 at all Phase Angles)	Ψ	No Degradation in Output Power			

NOTE:

1. To Mil-Std-1311 Version A, Test Method 2204, Two Tone, Reference each Tone.

The RF Line NPN Silicon Power Transistor 150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07

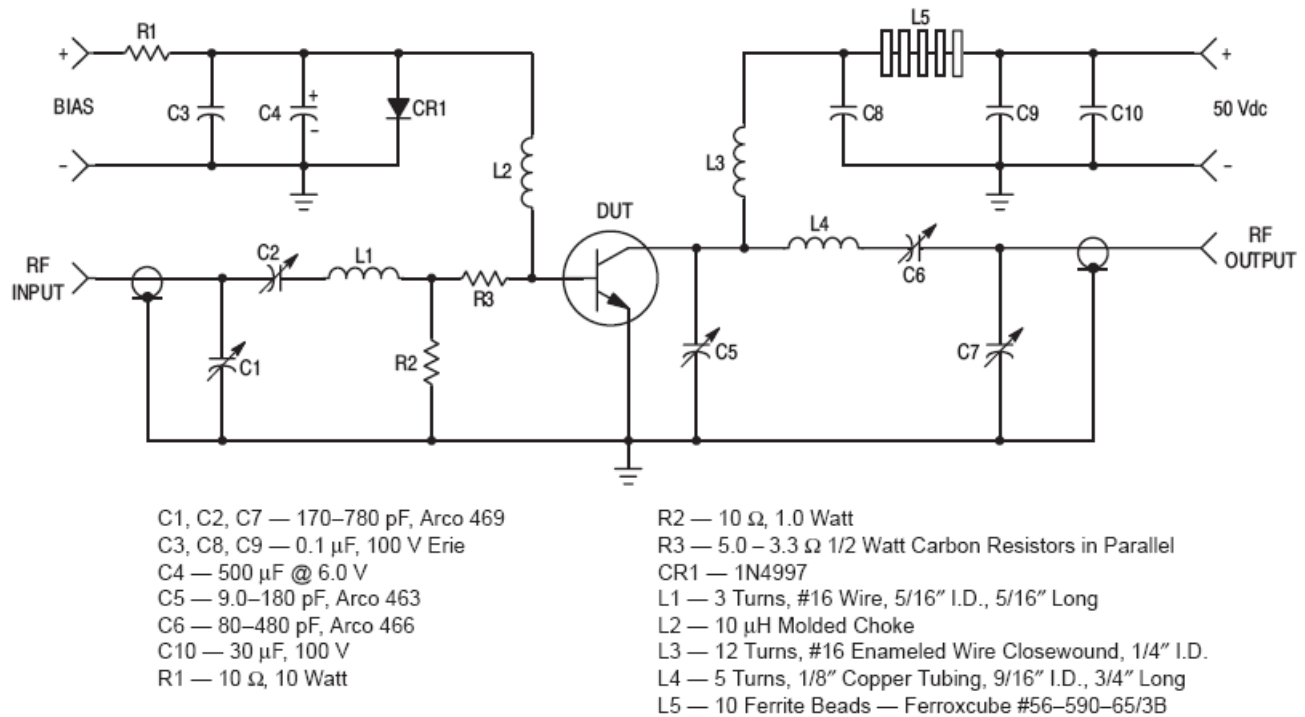


Figure 1. 30 MHz Test Circuit Schematic

The RF Line NPN Silicon Power Transistor 150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07

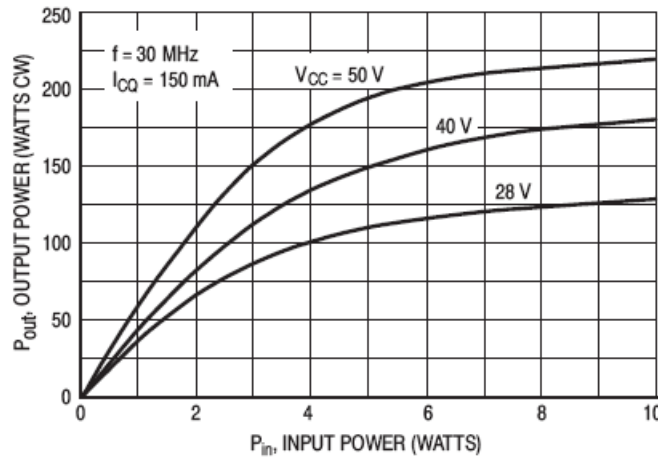


Figure 2. Output Power versus Input Power

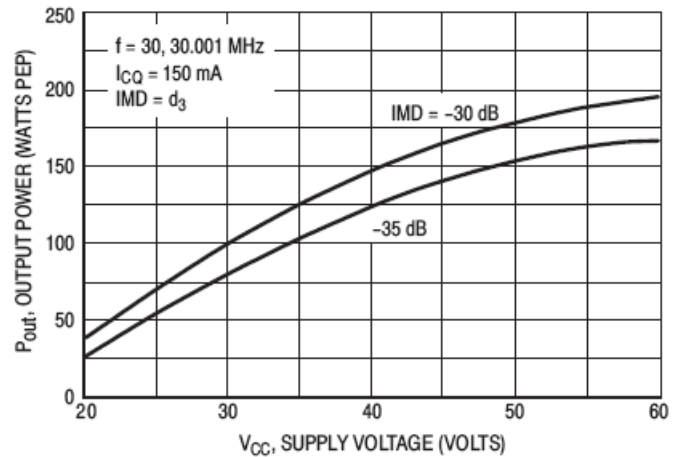


Figure 3. Output Power versus Supply Voltage

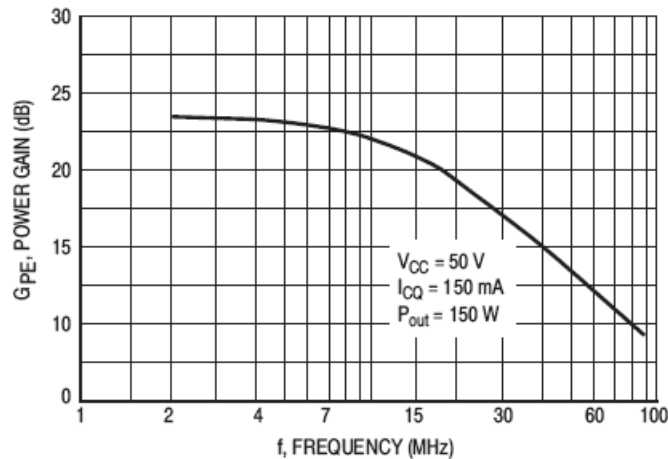


Figure 4. Power Gain versus Frequency

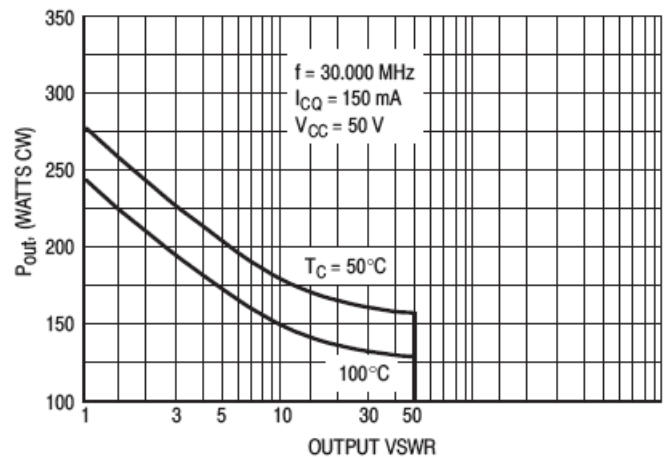


Figure 5. RF Safe Operating Area (SOAR)

The RF Line NPN Silicon Power Transistor 150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07

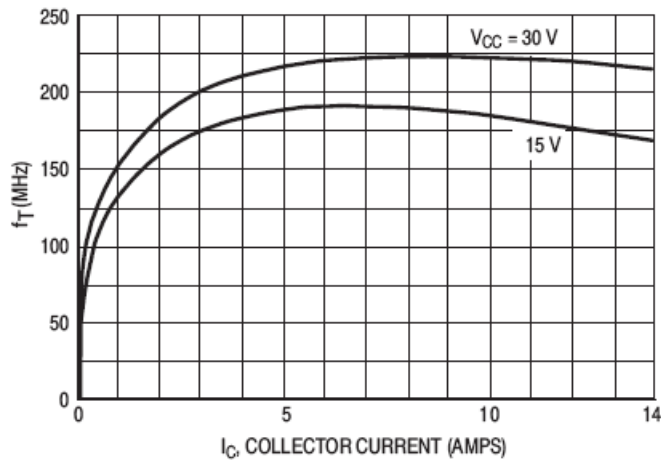


Figure 6. f_T versus Collector Current

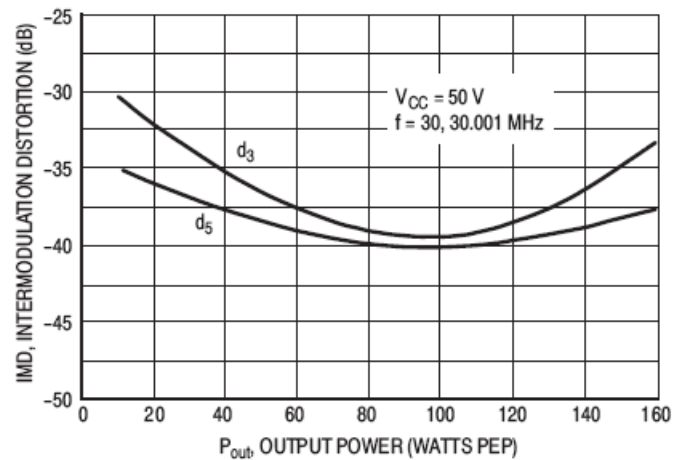


Figure 7. IMD versus P_{out}

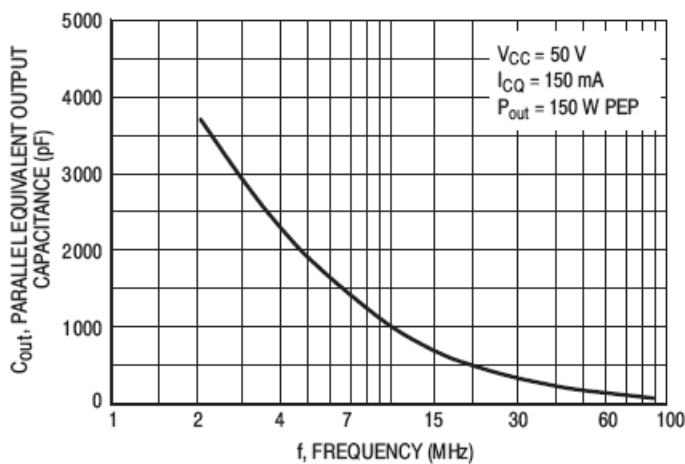


Figure 8. Output Capacitance versus Frequency

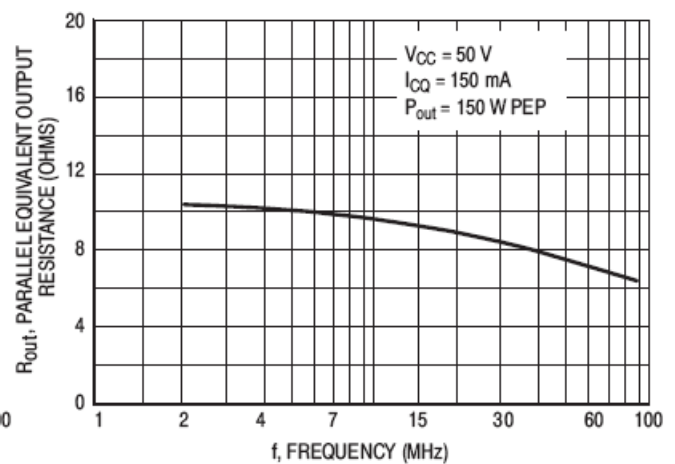


Figure 9. Output Resistance versus Frequency

The RF Line NPN Silicon Power Transistor 150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07


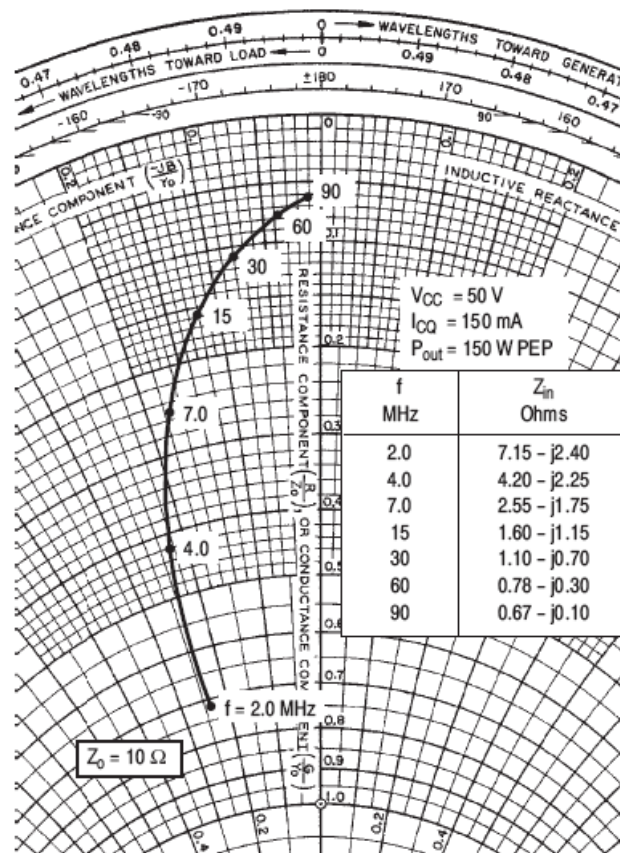


Figure 10. Series Equivalent Impedance

The RF Line NPN Silicon Power Transistor
150W(PEP), 30MHz, 50V

M/A-COM Products
Released - Rev. 07.07

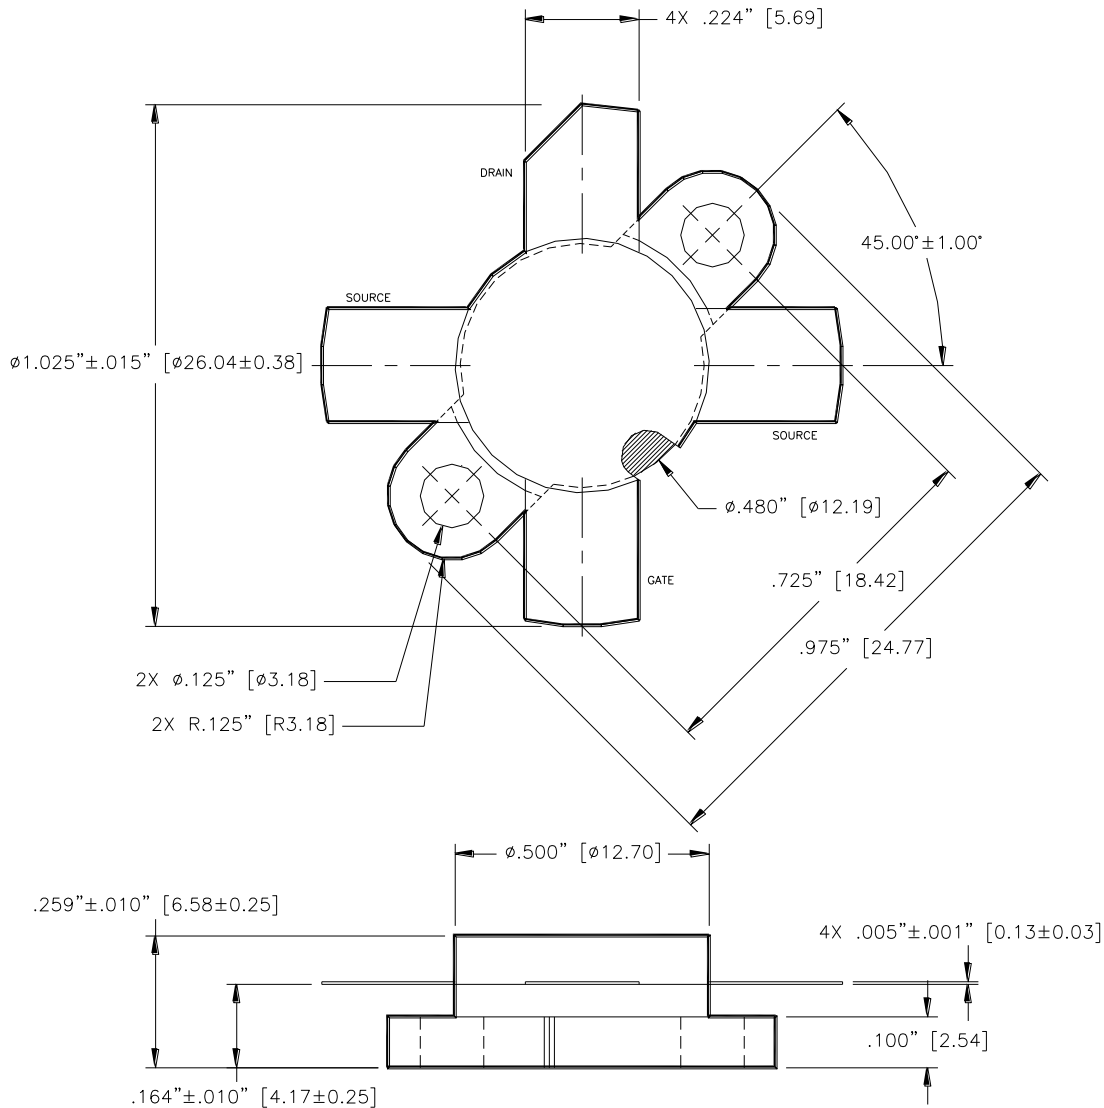

Unless otherwise noted, tolerances are inches $\pm .005$ [millimeters $\pm 0.13\text{mm}$]