

40-44GHz Down converter

GaAs Monolithic Microwave IC


Description

The CHR2299-99F is a down converter multifunction chip, which integrates LO X4 multiplier, a balanced cold FET mixer and a RF LNA.

It is designed for a wide range of applications, from military to commercial communication systems.


The circuit is manufactured with a power pHEMT process, 0.15 μ m gate length, via holes through the substrate, air bridges and electron beam gate lithography.

It is available in chip form.

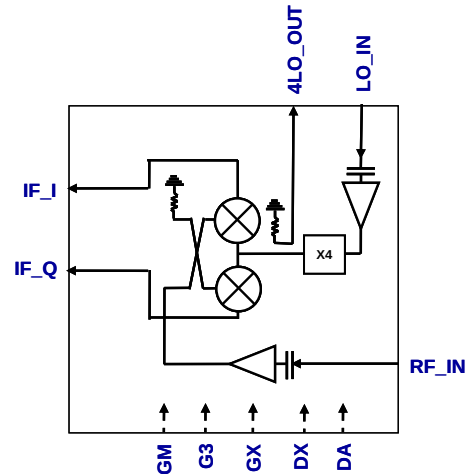

Main Features

- 40-44GHz RF bandwidth
- 21dB conversion gain
- x4 LO frequency multiplier
- x4 LO output port
- > 12dB image rejection
- DC bias: Vd = 4V @ Id = 240mA
- Chip size 3.97x2.25x0.1mm

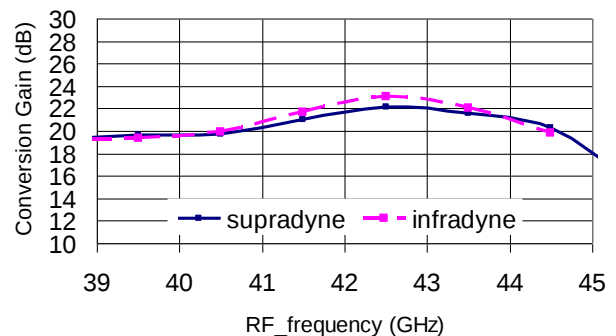

Main Characteristics

Tamb.= +25°C

Symbol	Parameter	Min	Typ	Max	Unit
F_RF	RF frequency range	40		44	GHz
F_LO	LO frequency range	9.5		11.5	GHz
F_IF	IF frequency range	DC		2.0	GHz
Gc	Conversion gain		21		dB

Electrical Characteristics

Tamb. = +25°C

Symbol	Parameter	Min	Typ	Max	Unit
F_RF	RF frequency range	40		44	GHz
F_LO	LO frequency range	9.5		11.5	GHz
F_IF	IF frequency range	DC		2.0	GHz
Gc	Conversion gain		21		dB
Im rej	Image rejection		12		dB
P_LO	LO Input power		0		dBm
NF	Noise figure for IF>0.1GHz		4.5		dB
IMD3	Intermodulation level at Pin _{2tones} = -30dBm		45		dBc
RL_RF	RF Return Loss		6		dB
RL_LO	LO Return Loss		12		dB
P_4FLO	Output power at 4LO_OUT port		-1		dBm
4xFLO_Lk	4xFLO leakage on RF port		-38		dBm
DX, DA	LO multiplier, buffer and LNA biasing		4		V
GM	Mixer gate biasing		-0.6		V
G3	LO buffer gate biasing		-0.3		V
GX	Multiplier gate biasing		-1.2		V
IdT	Total biasing current		240		mA

Electrostatic discharge sensitive device observe handling precautions!

These values are representative of chip on board measurements with a 90° hybrid coupler.

Absolute Maximum Ratings (1)

Tamb.= +25°C



Symbol	Parameter	Values	Unit
DX, DA	LO multiplier, buffer and LNA biasing	4.5	V
IdT	Total biasing current	300	mA
GM, G3, GX	Gate bias voltage	-2; +0.6	V
P_LO	Maximum peak input LO power overdrive ⁽²⁾	10	dBm
Pin_RF	Maximum peak input RF power overdrive ⁽²⁾	-5	dBm
Tj	Junction temperature	175	°C
Ta	Operating temperature range	-40 to +85	°C
Tstg	Storage temperature range	-55 to +155	°C
RTh	Thermal resistance, Tback side = +85 °C, Ptotal = 0.96 W	80	°C/W

⁽¹⁾ Operation of this device above any one of these parameters may cause permanent damage⁽²⁾ Duration < 1s



Typical chip on board Measurements in Temperature

DX= DA = 4V, GM = -0.6V, G3 = -0.3V, GX = -1.2V, P_LO = 0dBm



These values are representative of onboard measurements as defined on the section "Evaluation mother board". The losses are de-embedded.

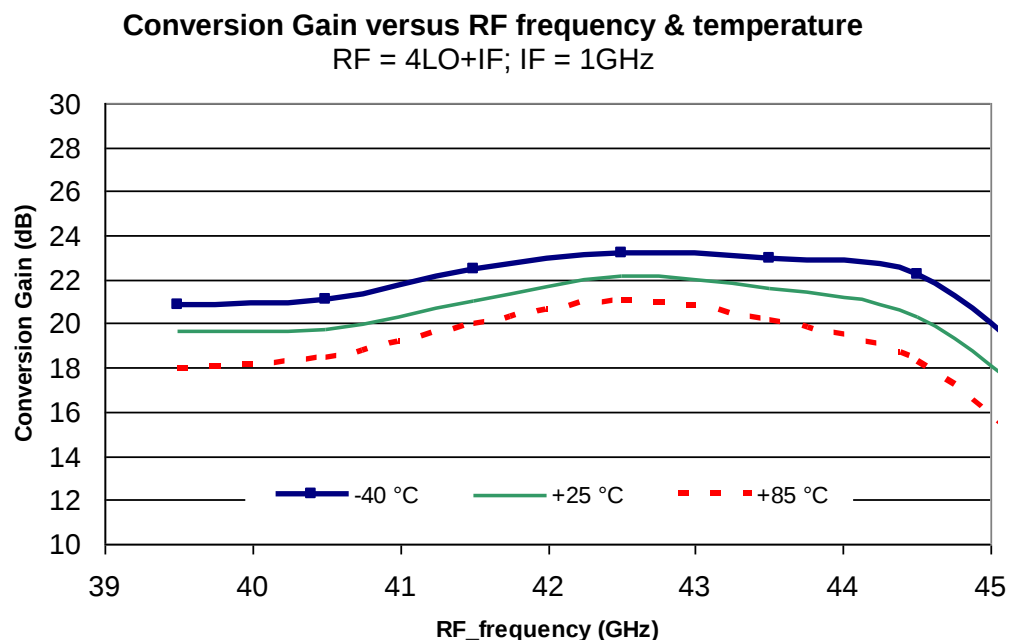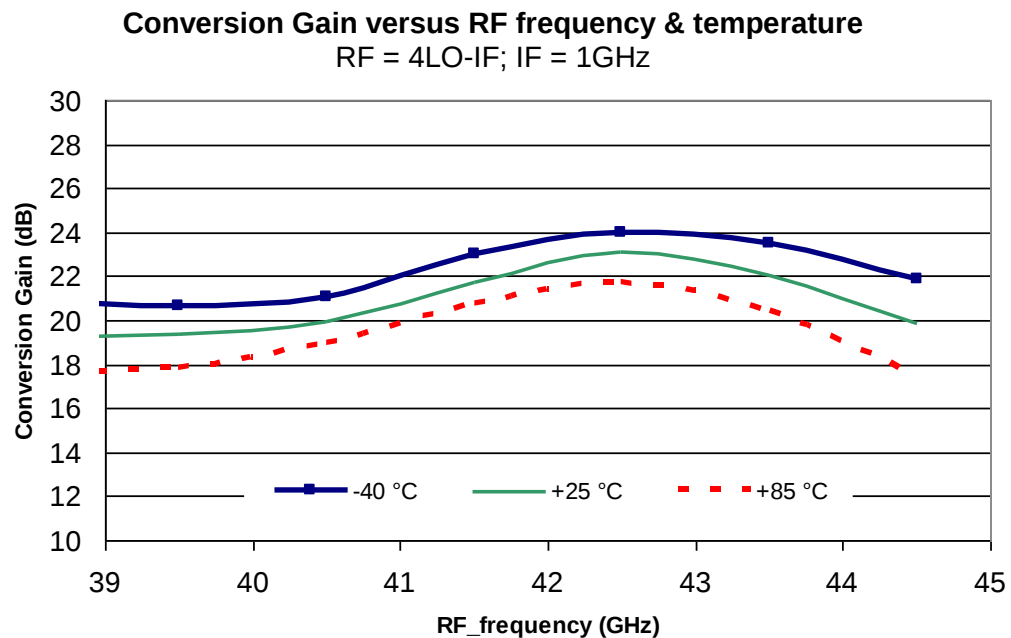

Typical chip on board Measurements in Temperature

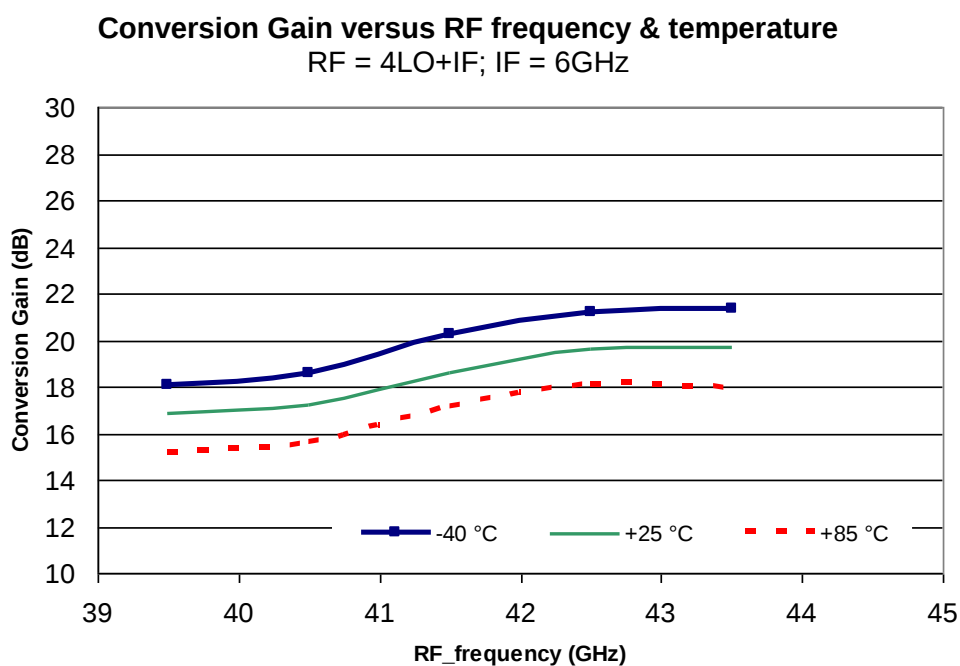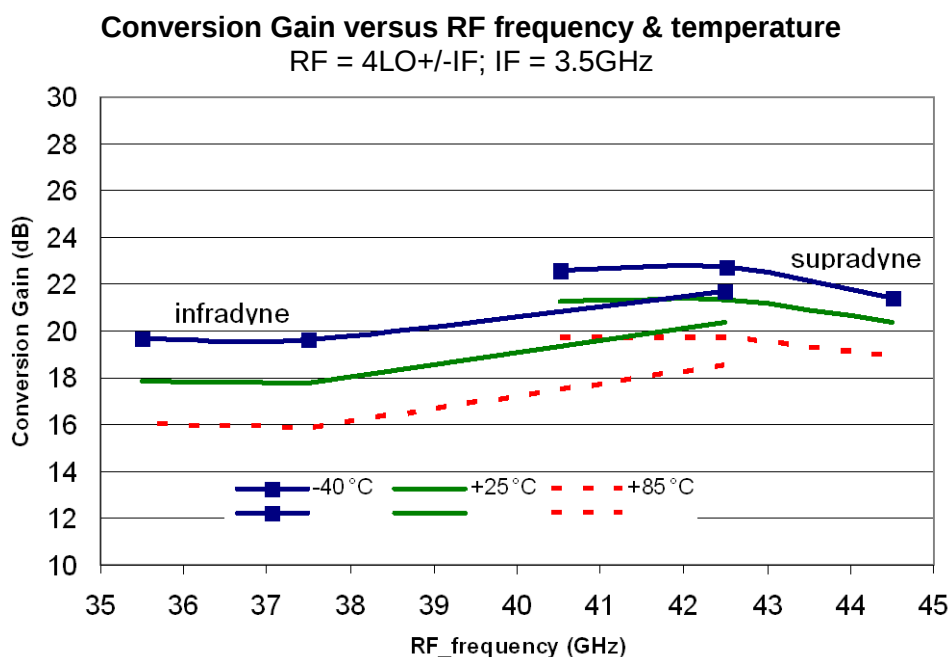


Typical chip on board Measurements in Temperature

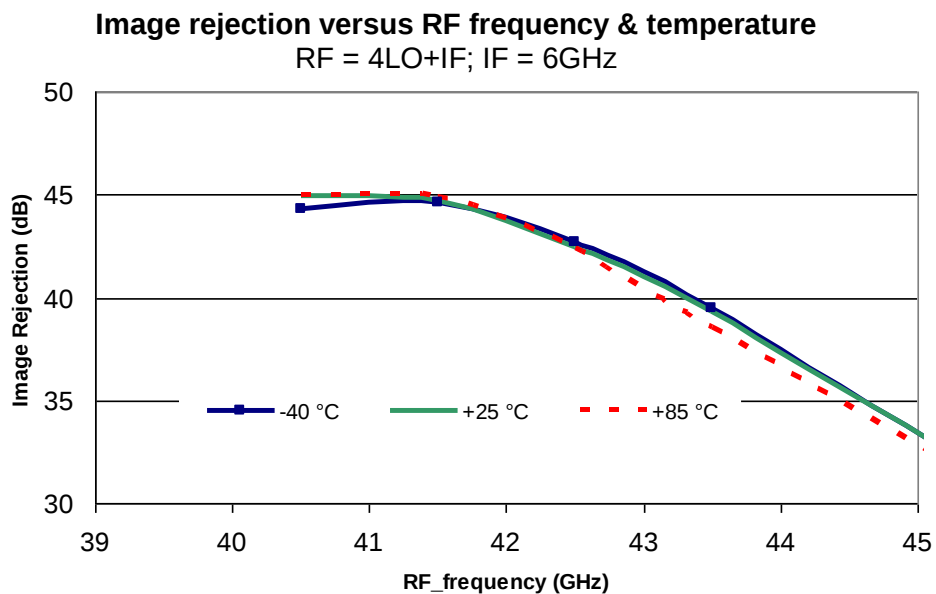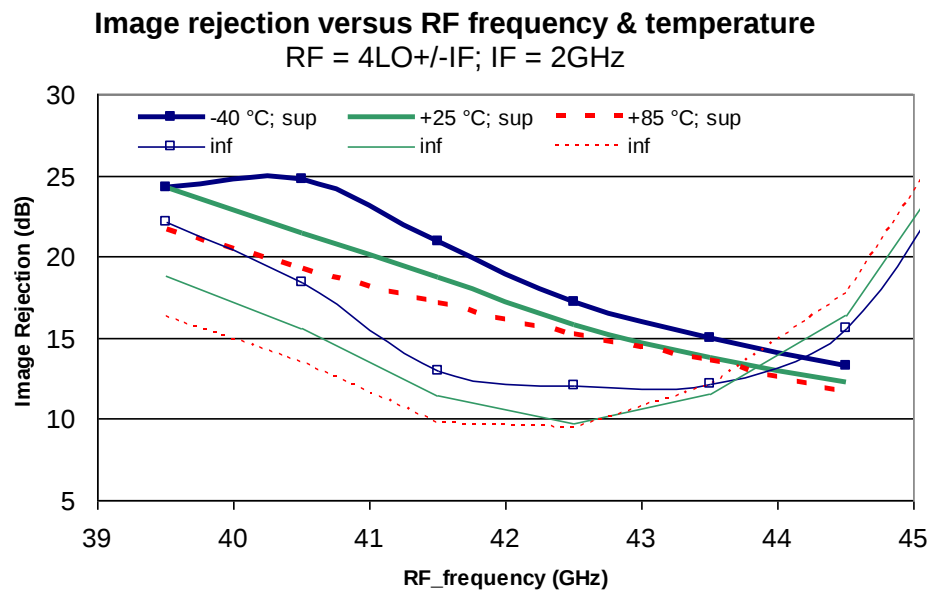


Typical chip on board Measurements

IMD3 versus RF frequency & Input power

Infradyne: IF = 2GHz

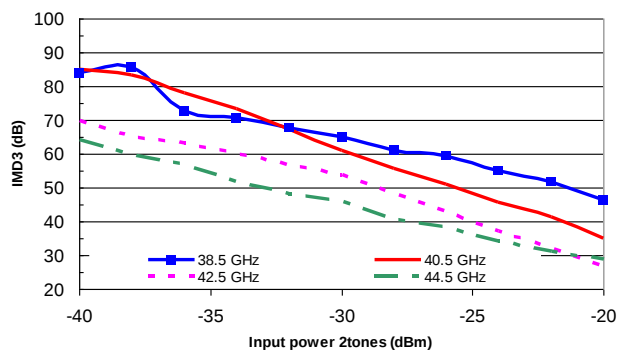


Supradyne: IF = 2GHz

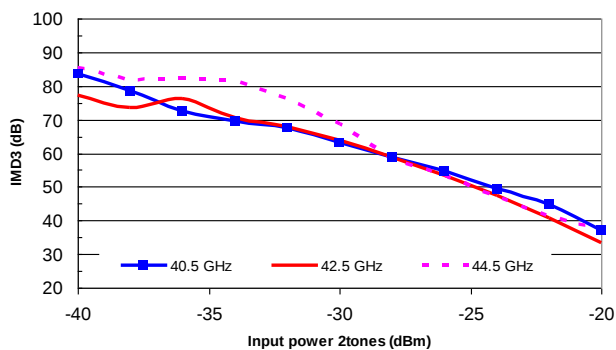


Input IP3 versus Temperature & Input power



Supradyne: RF = 40.5GHz; IF = 2GHz

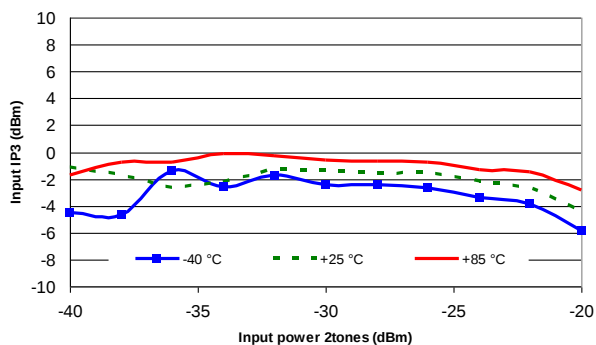


Supradyne: RF = 40.5GHz; IF = 3.5GHz

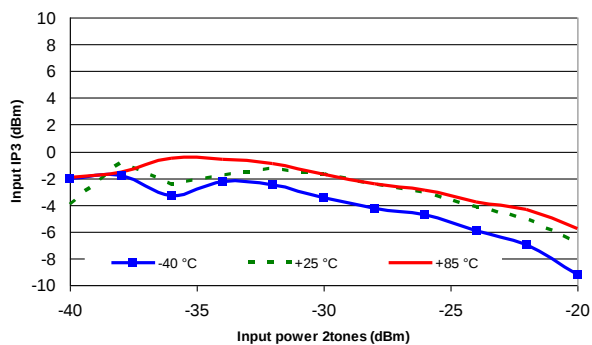

Typical chip on board Measurements

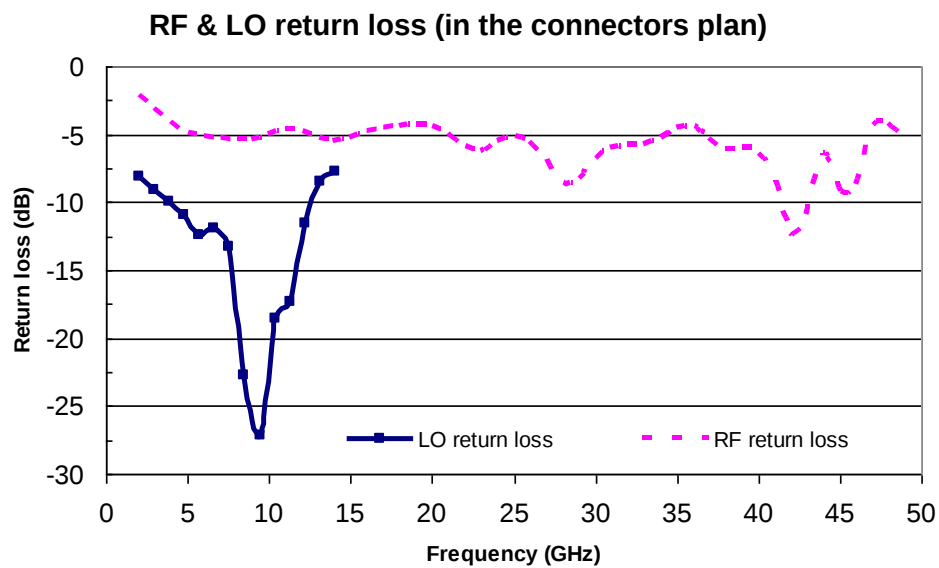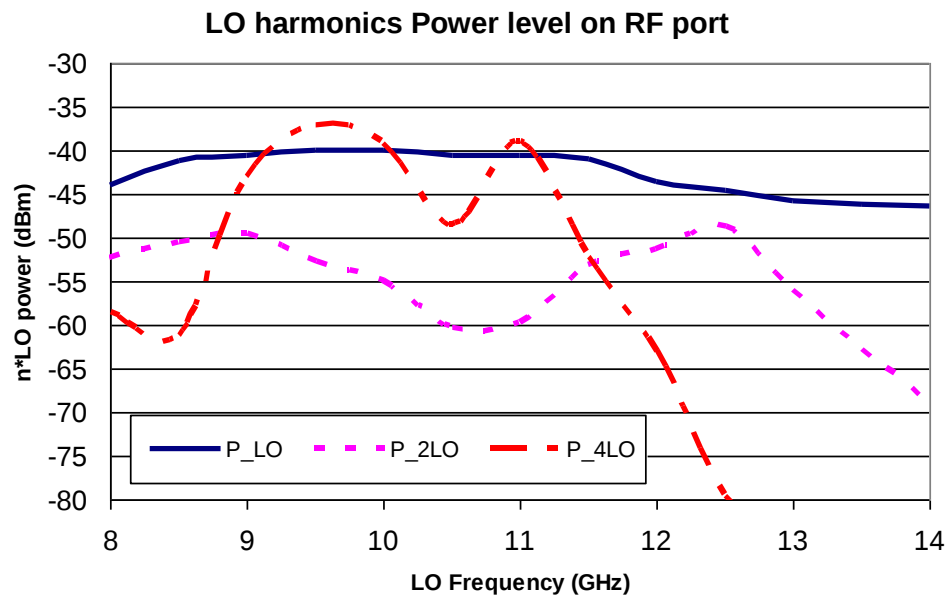

Mechanical data

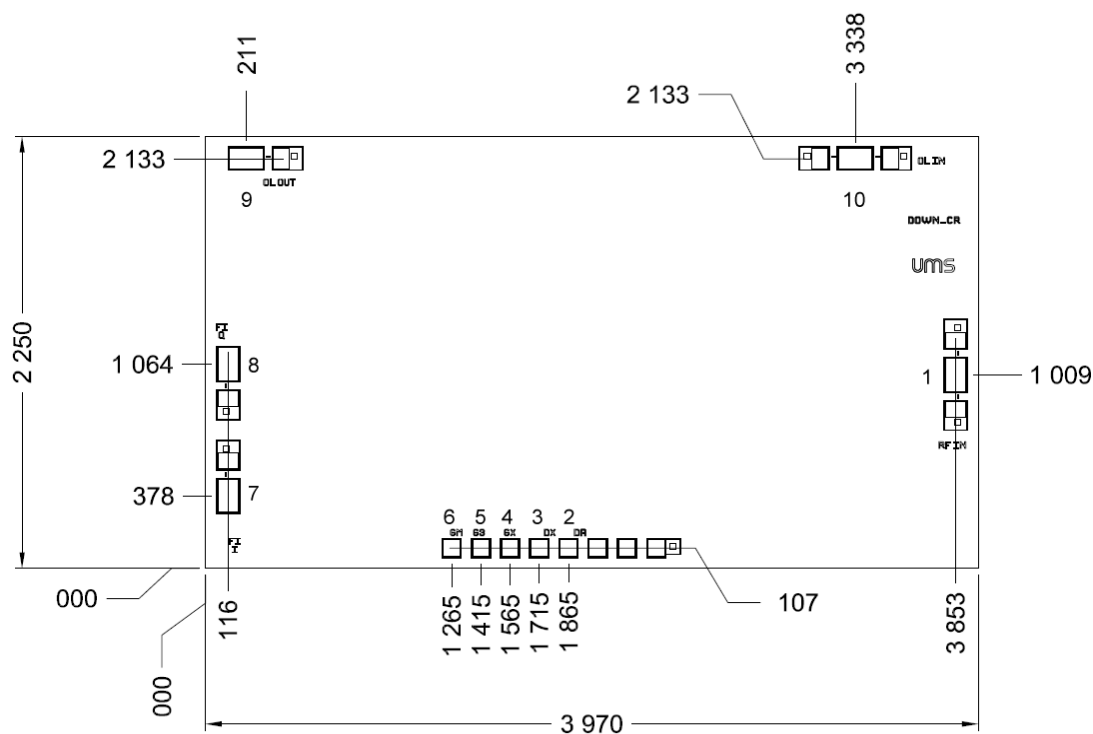


Chip thickness: 100 μm, units: μm, tol: +/- 35 μm
DC pads = 92x92 μm, RF pads = 178x114 μm

Pin number	Pin name	Description
1	RF_IN	RF input
2	DA	LNA drain voltage
3	DX	Multiplier & Buffer drain voltage
4	GX	Multiplier gate voltage
5	G3	LO buffer gate voltage
6	GM	Mixer gate voltage
7, 8	IF_I & IF_Q	IF outputs
9	4LO_OUT	Output 4xLO frequency
10	LO_IN	LO input

Recommended biasing

Pin Name	Pin Number	Parameter	Nominal value
GM	6	Mixer gate voltage	-0.6 V
G3	5	LO buffer gate voltage	-0.3 V
GX	4	X4 gate voltage	-1.2 V
DX	3	X4 and buffer drain voltage	4 V
DA	2	LNA Drain voltage	4 V

Chip assembly

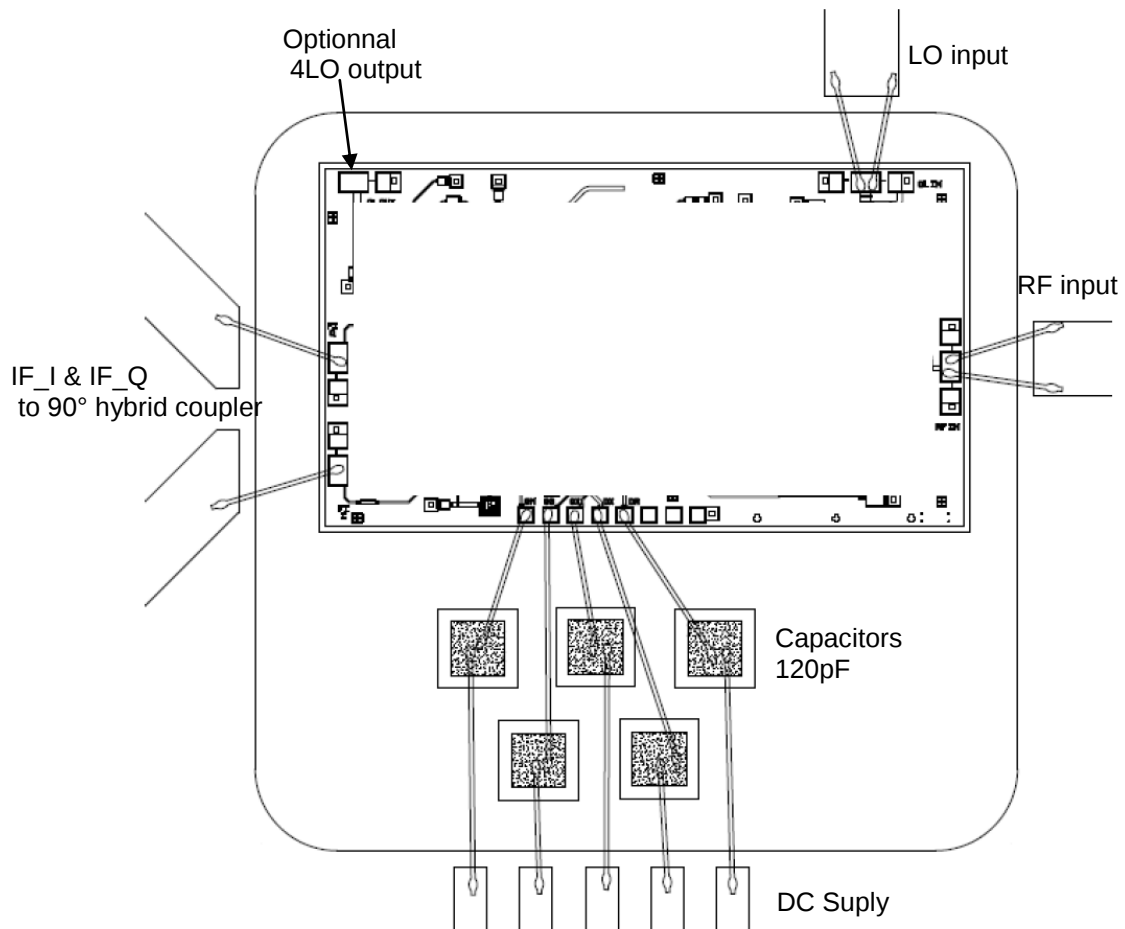


Note: Supply feed should be capacitively bypassed. 25µm diameter gold wire is recommended

Evaluation mother board



Based on typically Ro4003 / 8 mils or equivalent.

Decoupling capacitors of 10nF $\pm 10\%$ and chip 120pF $\pm 10\%$

90° hybrid coupler: 1-2GHz or 2-4GHz

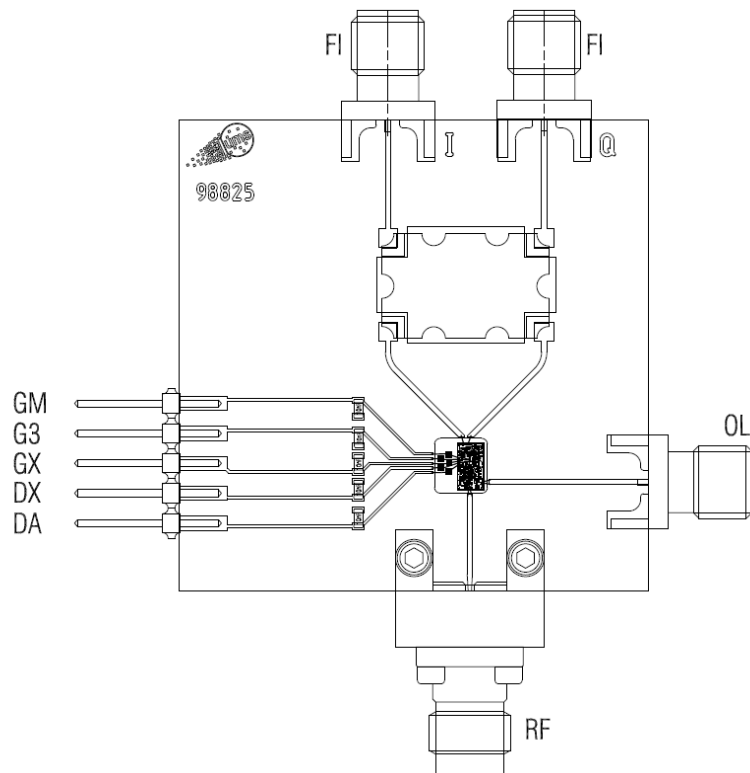

LO multiplier and buffers: 4V, 105mA

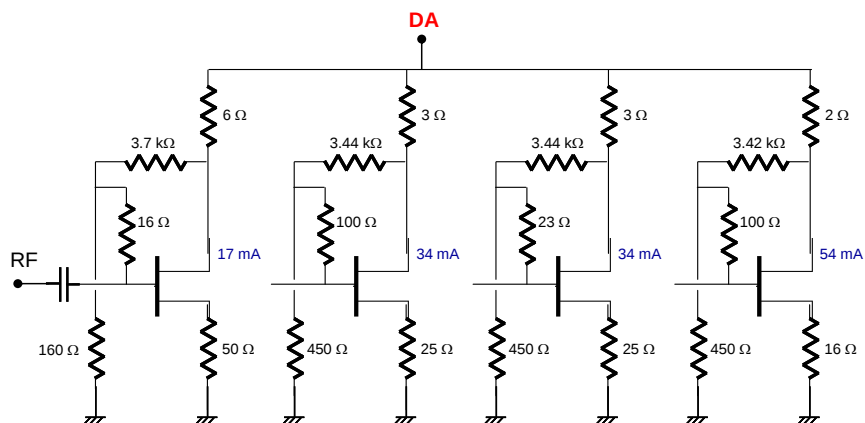

Recommended ESD management

Refer to the application note AN0020 available at <http://www.ums-gaas.com> for ESD sensitivity and handling recommendations for the UMS products.

Recommended environmental management

UMS products are compliant with the regulation in particular with the directives RoHS N°2011/65 and REACH N°1907/2006. More environmental data are available in the application note AN0019 also available at <http://www.ums-gaas.com>.

Ordering Information

Chip form:

CHR2299-99F/00

Information furnished is believed to be accurate and reliable. However **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.**. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**