



Description

- Standard 7 x 5mm crystal oscillator
Ceramic package with a seam sealed metal lid, hermetically sealed
- Model: CFPS-72
- Model Issue number: 12

Frequency Parameters

- Frequency: 24.0MHz
- Frequency Tolerance @ 25°C: INCLUSIVE
- Frequency Stability: $\pm 50.00\text{ppm}$
- Operating Temperature Range: 0.00 to 70.00°C
- Ageing: $\pm 3\text{ppm}$ per year max

Electrical Parameters

- Supply Voltage: 5.0V
- Supply Voltage Tolerance: $\pm 10\%$
- Current Draw: 30mA max

Output Details

- Output Compatibility: HCMOS/TTL
- Output Load: 50pF max
- Rise and Fall time: 6ns max
- Duty Cycle: 45/55%

Output Control

- Standby Operation
Logic '1' (>70% VS) to pad 1 enables oscillator output
Logic '0' (<30% VS) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: 10 μ A max

Environmental Parameters

- Shock: MIL-STD-202, Method 213, Condition E
- Vibration: MIL-STD-883, Method 2007, Condition A
- Storage Temperature Range: -55 to 125°C

Compliance

- RoHS Status: Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable


Packaging

- Pack Type: Bulk: Loose in bulk pack
- Pack Size: 100
- Alternative packing option available


This document is correct at the time of printing; please contact your local office for the latest version.



Outline (mm)

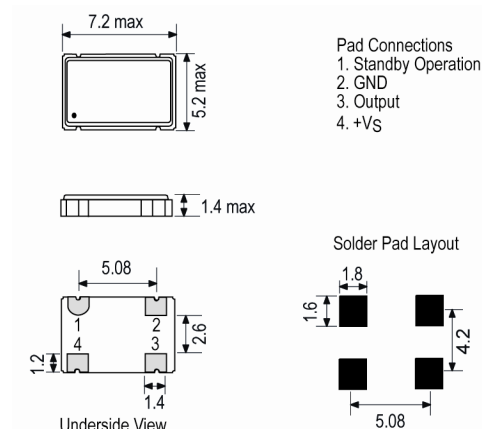

Test Circuit

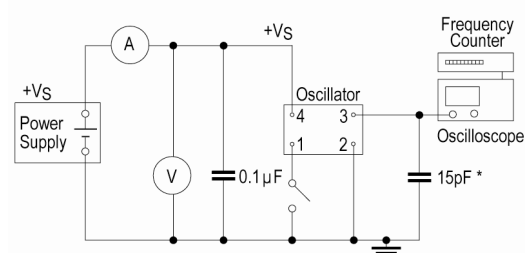

* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18


USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com


Web: www.iqdfrequencyproducts.com



Wave Form

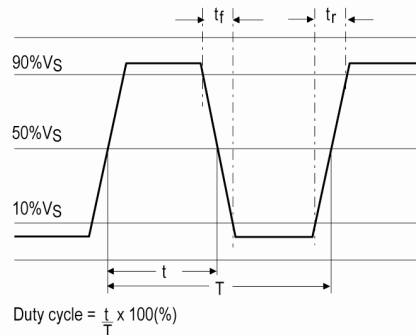

Phase Noise / Jitter

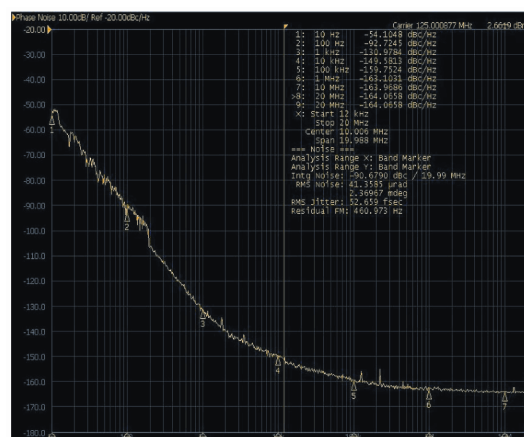

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18

USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com