



## Description

- Standard 2 x 1.6 crystal oscillator in a ceramic package with a seam sealed metal lid, hermetically sealed
- Model IQXO-540
- Model Issue number 2

## Frequency Parameters

- Frequency 12.0MHz
- Frequency Tolerance @ 25°C INCLUSIVE
- Frequency Stability  $\pm 50.00\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Ageing  $\pm 5\text{ppm}$

## Frequency Stability

- Inclusive of tolerance, supply voltage and load variations over the operating temperature range

## Electrical Parameters

- Supply Voltage 3.3V
- Supply Voltage Tolerance  $\pm 10\%$
- Current Draw 4mA max
- Standby Current: 10 $\mu\text{A}$  max (pad 1 at logic '0')

## Output Details

- Output Compatibility CMOS
- Output Load 15pF max
- Rise and Fall time (10% - 90%) 5.0ns max
- Duty Cycle 45/55%

## Output Control

- Standby Operation: Logic '1' ( $\geq 70\%V_S$ ) to pad 1 enables oscillator output  
Logic '0' ( $\leq 30\%V_S$ ) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state  
No connection to pad 1 enables oscillator output

## Environmental Parameters

- Vibration: IEC 60068-2-6: 1.5mm amplitude, 10Hz-55Hz, 1min in 3 mutually perpendicular planes, duration 2hrs each plane (total 6hrs)
- Storage Temperature Range: -40 to 85°C
- Impact: Weight of 10G dropped to centre of part from a height of 6mm

## Compliance

- RoHS Status Compliant
- REACH Status Compliant

## Packaging


- Pack Type: Reel Tape and reel in accordance with EIA-481-D
- Pack Size 3,000

- Alternative packing option available



*This document is correct at the time of printing; please contact your local office for the latest version.*



## Outline (mm)




- Pad Connections
- Standby Operation
  - GND
  - Output
  - +Vs




Underside View

## Solder Pad Layout




## Test Circuit

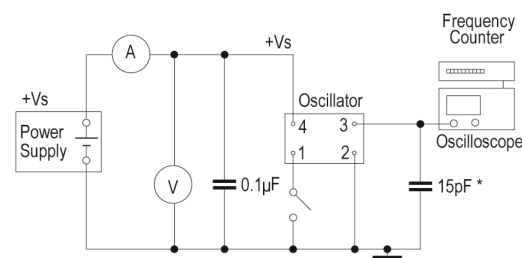

\* Inclusive of jigging and equipment capacitance

## Wave Form

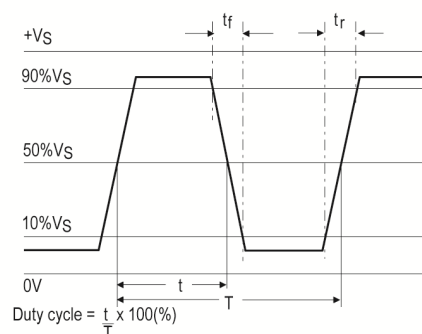

## Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18

USA: +1 (0)408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)