



### Description

- Microcomputer Compensated Crystal Oscillator with voltage control (MCXO)
- Model IQMT-100-3-B
- Model Issue number 1

### Frequency Parameters

- Frequency 20.0MHz
- Frequency Tolerance @ 25°C  $\pm 0.50$ ppm
- Frequency Stability  $\pm 0.14$ ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing  $\pm 0.02$ ppm max per day,  $\pm 1$ ppm max per year
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC=1.65V and load=15pF):  $\pm 0.1$ ppm max
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and load=15pF):  $\pm 0.1$ ppm max
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and within 30 days after ex-works):  $\pm 0.5$ ppm
- Short Term Stability (@ 25°C after 10mins power on): 2E-10/s typ @ 10MHz
- Frequency Stability: TA varied from -40°C to 85°C, measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V, load=15pF and temperature variable speed less than 2°C per minute.
- Ageing: TA=25°C, Vs=3.3V, VC=1.65V and after 1hr of operation.

### Electrical Parameters


- Supply Voltage 3.3V
- Supply Voltage Tolerance  $\pm 5\%$
- Current Draw 10.00mA max
- Current: TA=25°C, Vs=3.3V, VC=1.65V and load=15pF

### Frequency Adjustment


- Pulling  $\pm 10$ ppm to  $\pm 15$ ppm
- Control Voltage Details 1.65V  $\pm 1.65$ V
- Linearity:  $\pm 10\%$  max
- Input Impedance: 100k $\Omega$  min
- Slope: Positive

### Output Details


- Output Compatability HCMOS
- Output Load 15pF
- Rise and Fall time (10% - 90%) 8ns max
- Duty Cycle 45/55%
- Output Low (@ Vs=3.3V, load=15pF): 0.4V max
- Output High (@ Vs=3.3V, load=15pF): 2.4V min
- Phase Noise (@ 10MHz typ):
  - 90dBc/Hz @ 10Hz
  - 115dBc/Hz @ 100Hz
  - 135dBc/Hz @ 1kHz
  - 145dBc/Hz @ 10kHz
  - 148dBc/Hz @ 100kHz
  - 150dBc/Hz @ 1MHz

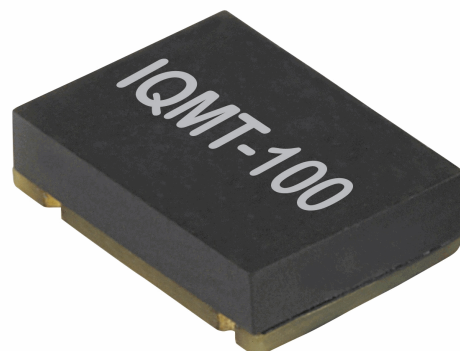

### Outline (mm)

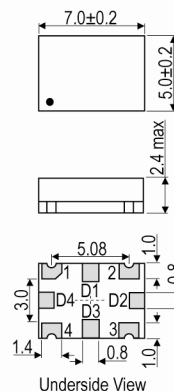

Pad Connections  
1. Voltage Control  
2. GND  
3. Output  
4. +Vs  
D1, D2, D3, D4. N/C



### Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18

USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



### **Environmental Parameters**

- Shock: IEC 60068-2-27, Test Ea: 100G acceleration for 6ms, half sinewave, in 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc: 10Hz-2000Hz, 0.75mm amplitude, 10G acceleration, 30mins per cycle, in 3 mutually perpendicular planes, test duration 2hrs
- Storage Temperature Range: -55 to 105°C
- Operable Temperature Range: -40 to 85°C
- ESD Level:  
HBM, Class 2: 2000V to 4000V, JEDEC JS-001-2010  
Machine Model, Class B: 200V to 400V, JEDEC JS-001-2010

### **Manufacturing Details**

- Moisture Sensitivity Level: 2
- Maximum Reflow Temperature: 260°C (30secs max)

### **Compliance**

- |                |           |
|----------------|-----------|
| ▪ RoHS Status  | Compliant |
| ▪ REACH Status | Compliant |

### **Packaging**

- |                   |                    |
|-------------------|--------------------|
| ▪ Pack Type: Bulk | Loose in bulk pack |
| Pack Size         | 1                  |
- Alternative packing option available

*This document is correct at the time of printing; please contact your local office for the latest version.*

---

### **Sales Office Contact Details:**

UK: +44 (0)1460 270200

Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18

USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)