



Description

- Surface mount temperature compensated crystal oscillator (TCXO) in a miniature ceramic package

Model	CFPT-69
Model Issue number	2

Frequency Parameters

- Frequency: 26.0MHz
- Frequency Tolerance @ 25°C: $\pm 2.00\text{ppm}$
- Frequency Stability: $\pm 0.50\text{ppm}$
- Operating Temperature Range: -30.00 to 85.00°C
- Ageing: $\pm 1\text{ppm}$ max per year @ 25°C $\pm 2^\circ\text{C}$
- Supply Voltage Variation: $\pm 0.2\text{ppm}$ max
- Load Variation: $\pm 0.1\text{ppm}$ max

Electrical Parameters

- Supply Voltage: 3.0V
- Supply Voltage Tolerance: $\pm 5\%$
- Current Draw: 2.00mA max

Output Details

- Output Compatibility: Clipped Sine
- Output Load: 10k Ω /10pF $\pm 10\%$
- Output: 0.8V pk-pk min

Noise Parameters

- Phase Noise (typical)
 - 80dBc/Hz @ 10Hz
 - 105dBc/Hz @ 100Hz
 - 130dBc/Hz @ 1kHz
 - 145dBc/Hz @ 10kHz
- Harmonics: -5dBc max

Environmental Parameters

- Vibration: 1.5mm amplitude, 10Hz-55Hz-10Hz, sweep rate 1min in 3 mutually perpendicular planes, duration 2hrs each plane
- Storage Temperature Range: -40 to 85°C
- Drop: 150cm drop (6 directions x 3 times) onto hard wooden board

Manufacturing Details

- Washing: Not recommended
- Soldering: Suitable for Convection Reflow soldering. Peak temperature 260°C for 10sec max
- MSL 1

Compliance


- RoHS Status: Compliant
- REACH Status: Compliant

Packaging

- Pack Type: Bulk: Loose in bulk pack
- Pack Size: 100
- Alternative packing option available

This document is correct at the time of printing; please contact your local office for the latest version.

Outline (mm)

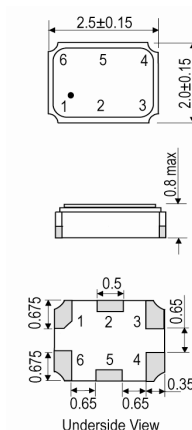


Pad Connections


- GND
- N/C
- GND
- Output
- N/C
- +VS

Note 1: a capacitor of 0.01 μF between +VS and GND is recommended.
Note 2: a DC bias cut capacitor of 0.01 μF at the output is recommended.

Solder Pad Layout



Test Circuit

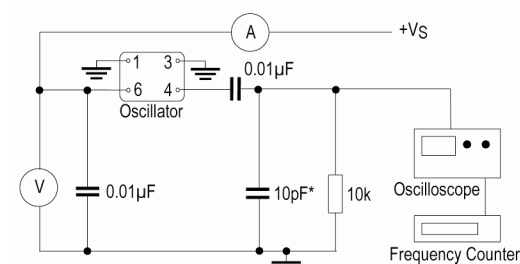

* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com