
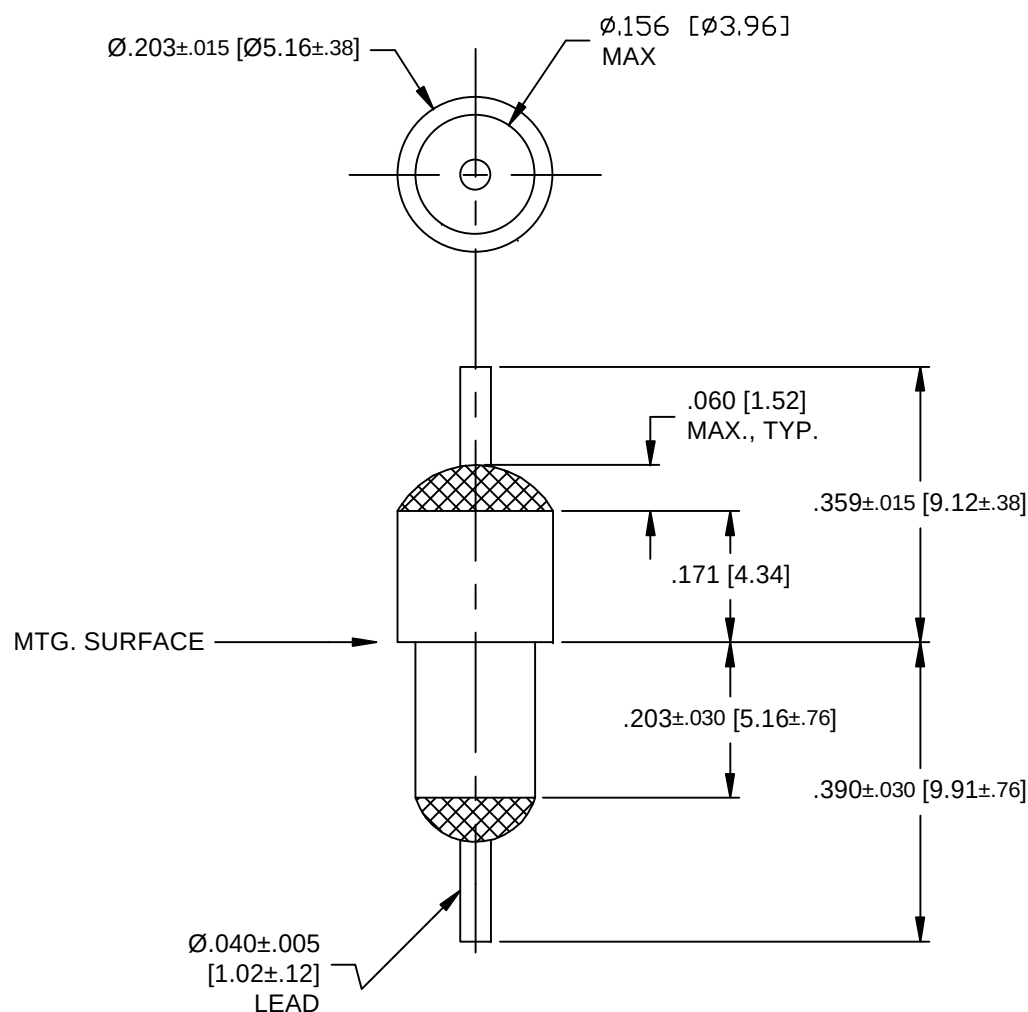


(CAPACITANCE MUST BE
BETWEEN .3uF AND .6uF ONLY)



BUSHING FINISH	SILVER
LEAD FINISH	SILVER
CAPACITANCE	.3uF + 100 /- 0%
TEMP. RANGE	-55°C TO +125°C
CURRENT	10 AMPS MAX.
WORKING VOLTAGE	85°C ---VDC MAX. 125°C 50 VDC MAX.
DC RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
50 KHz	8
100 KHz	13
1	32
10	47
100	60
500	70
1 GHz	70
SCHEMATIC: 	
MARKING: PART: SCI 304P BAG: 54-786-003 DATE CODE QTY./BAG (200 MAX.)	

[illegible]

Quality Products From The Specialists In Electro-Magnetic Compatibility

