


- NOTES:
- 1) HARDWARE IS INCLUDED
 - 2) SUGGESTED MOUNTING HOLE: Ø.228 [5.79]
 - 3) MAXIMUM MOUNTING TORQUE: 6 IN.LBS.
 - 4) MAX. REFLOW TEMP. IS 245°C FOR 5 SECONDS



LEAD FINISH:	GOLD
BUSHING FINISH:	SILVER
CAPACITANCE	1000 pF ^{+80%} _{-20%}
TEMP. RANGE	-55°C TO +125°C
CURRENT	25 AMP
WORKING VOLTAGE	125°C, 500 VDC MAX.
D.C. RESISTANCE	.01 OHMS MAX.
MIN. I.L. PER MIL-STD-220 @ 25°C NO LOAD	

SCHEMATIC

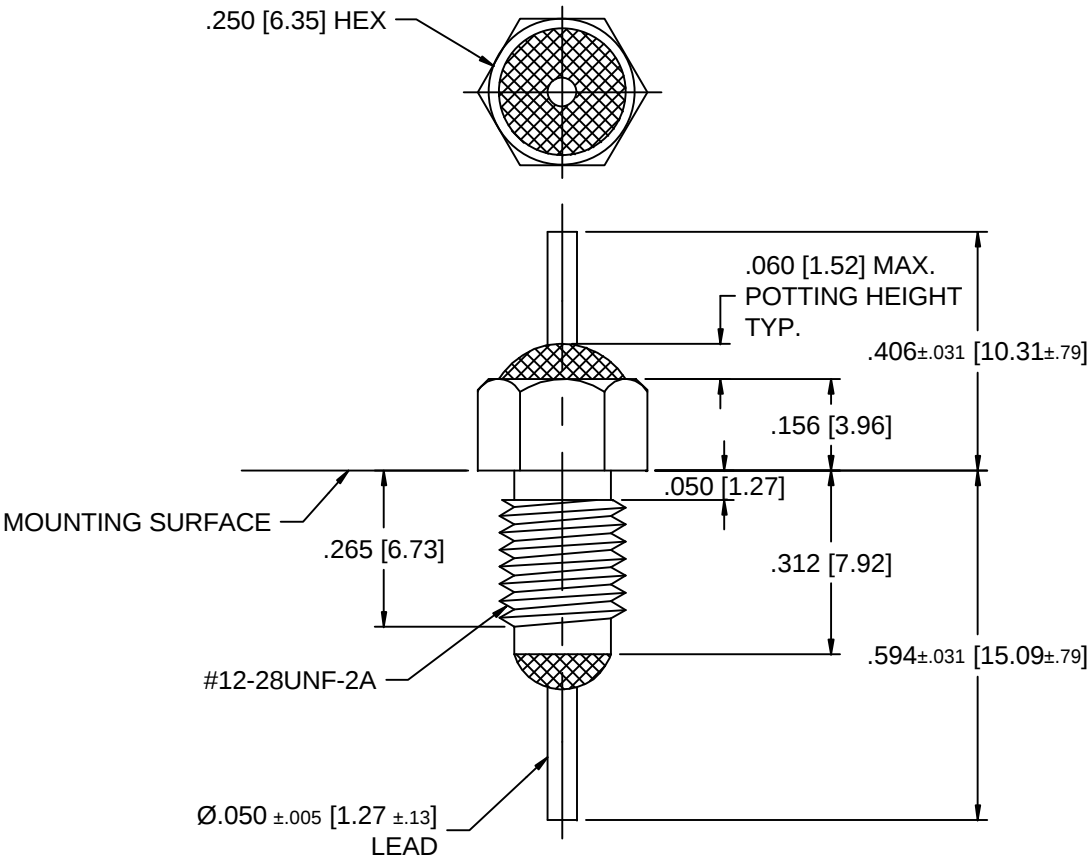

MARKING:
PART: SF743044
BAG: SCI 54F-743-044
DATE CODE
LOT NO.
QTY. / BAG (100 MAX.)

			00	REV NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.		FAIRVIEW PENNSYLVANIA	
			CN 30914-CPD	CHANGE NOTICE	Dec. .x±	Dwn. D. REILLY		Description	
					Dec. .xx± .010 [.25]				
					Dec. .xxx± .005 [.13]	Date 9/28/06	FT, RESIN SEAL FILTER		
					Angles ± 0° 30'	Engr. Struchen		54F-743-044	
					CODE IDENT. NO. 0LSP2	Scale NONE			