



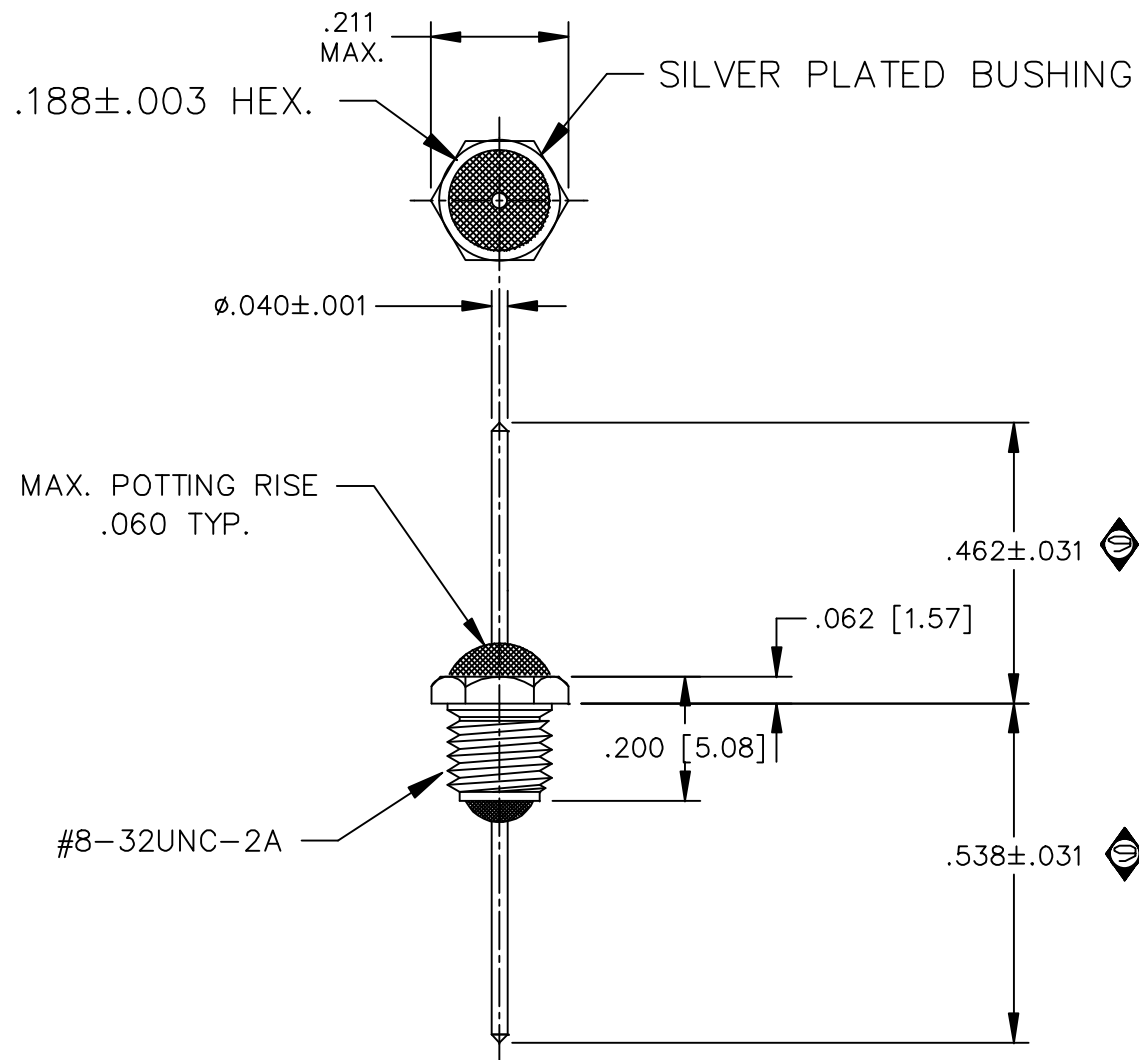

NOTE: HARDWARE IS INCLUDED.

LEAD FINISH:	SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	1000pF TO 3000pF
TEMP. RANGE	-55°C TO 125°C
CURRENT	15 AMP MAX.
WORKING VOLTAGE	125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
7 MHz	3dB
25 GHz	10dB
50 GHz	15dB
100 GHz	20dB
300 MHz	40dB
500 MHz	50dB
1 TO 10 GHz	55dB

SCHEMATIC



MARKING:

PART: S619-4

BAG: SCI 859619-4

DATE CODE

QTY/BAG (100 MAX.)

				9	8	7	6	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	ERIE, FAIRVIEW PENNSYLVANIA	
				CN 201159	CN 200774 REDRAWN	CN 193413	CN 191643	CHANGE NOTICE	Fractions $\pm 1/64$		Dwn. KRDZALIC	Description
									Dec. .xx±		DATE 4/18/01	FILTER
									Dec. .xxx± .010		Apvd. DUNN	
									Angles $\pm 0^{\circ} 30'$		Scale NONE	
									CODE IDENT. NO. OLSP2			859619-4