



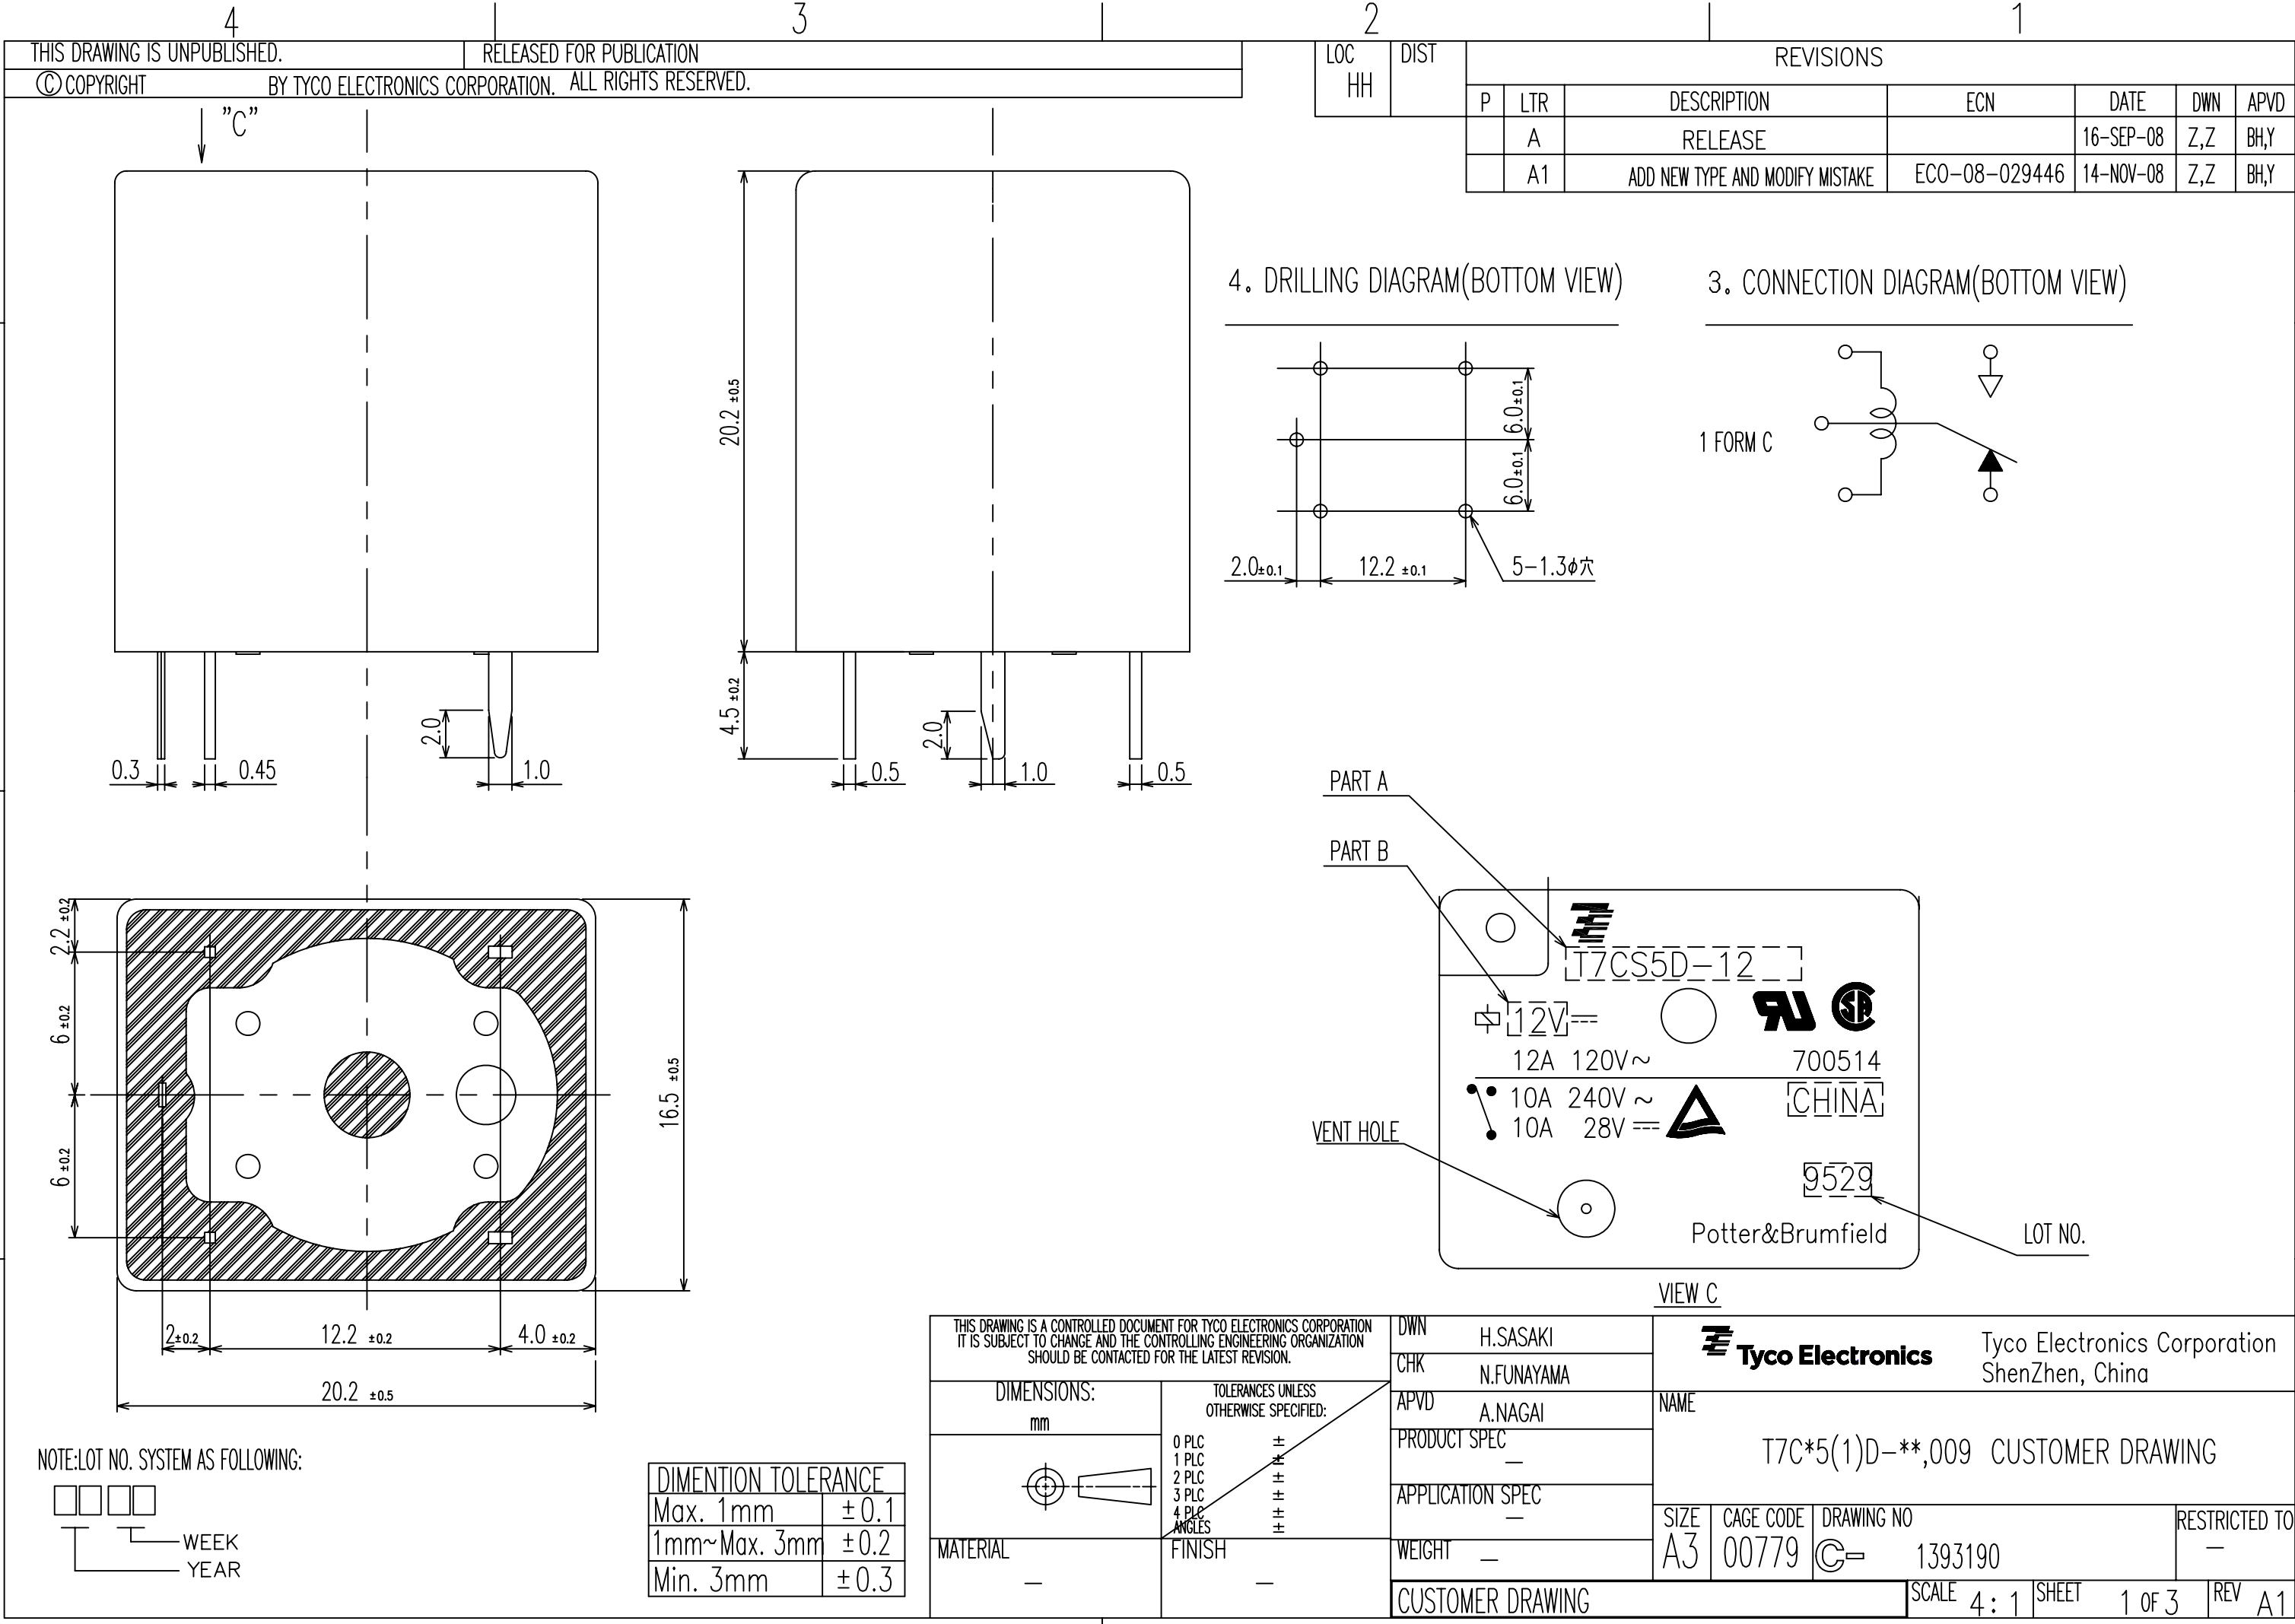

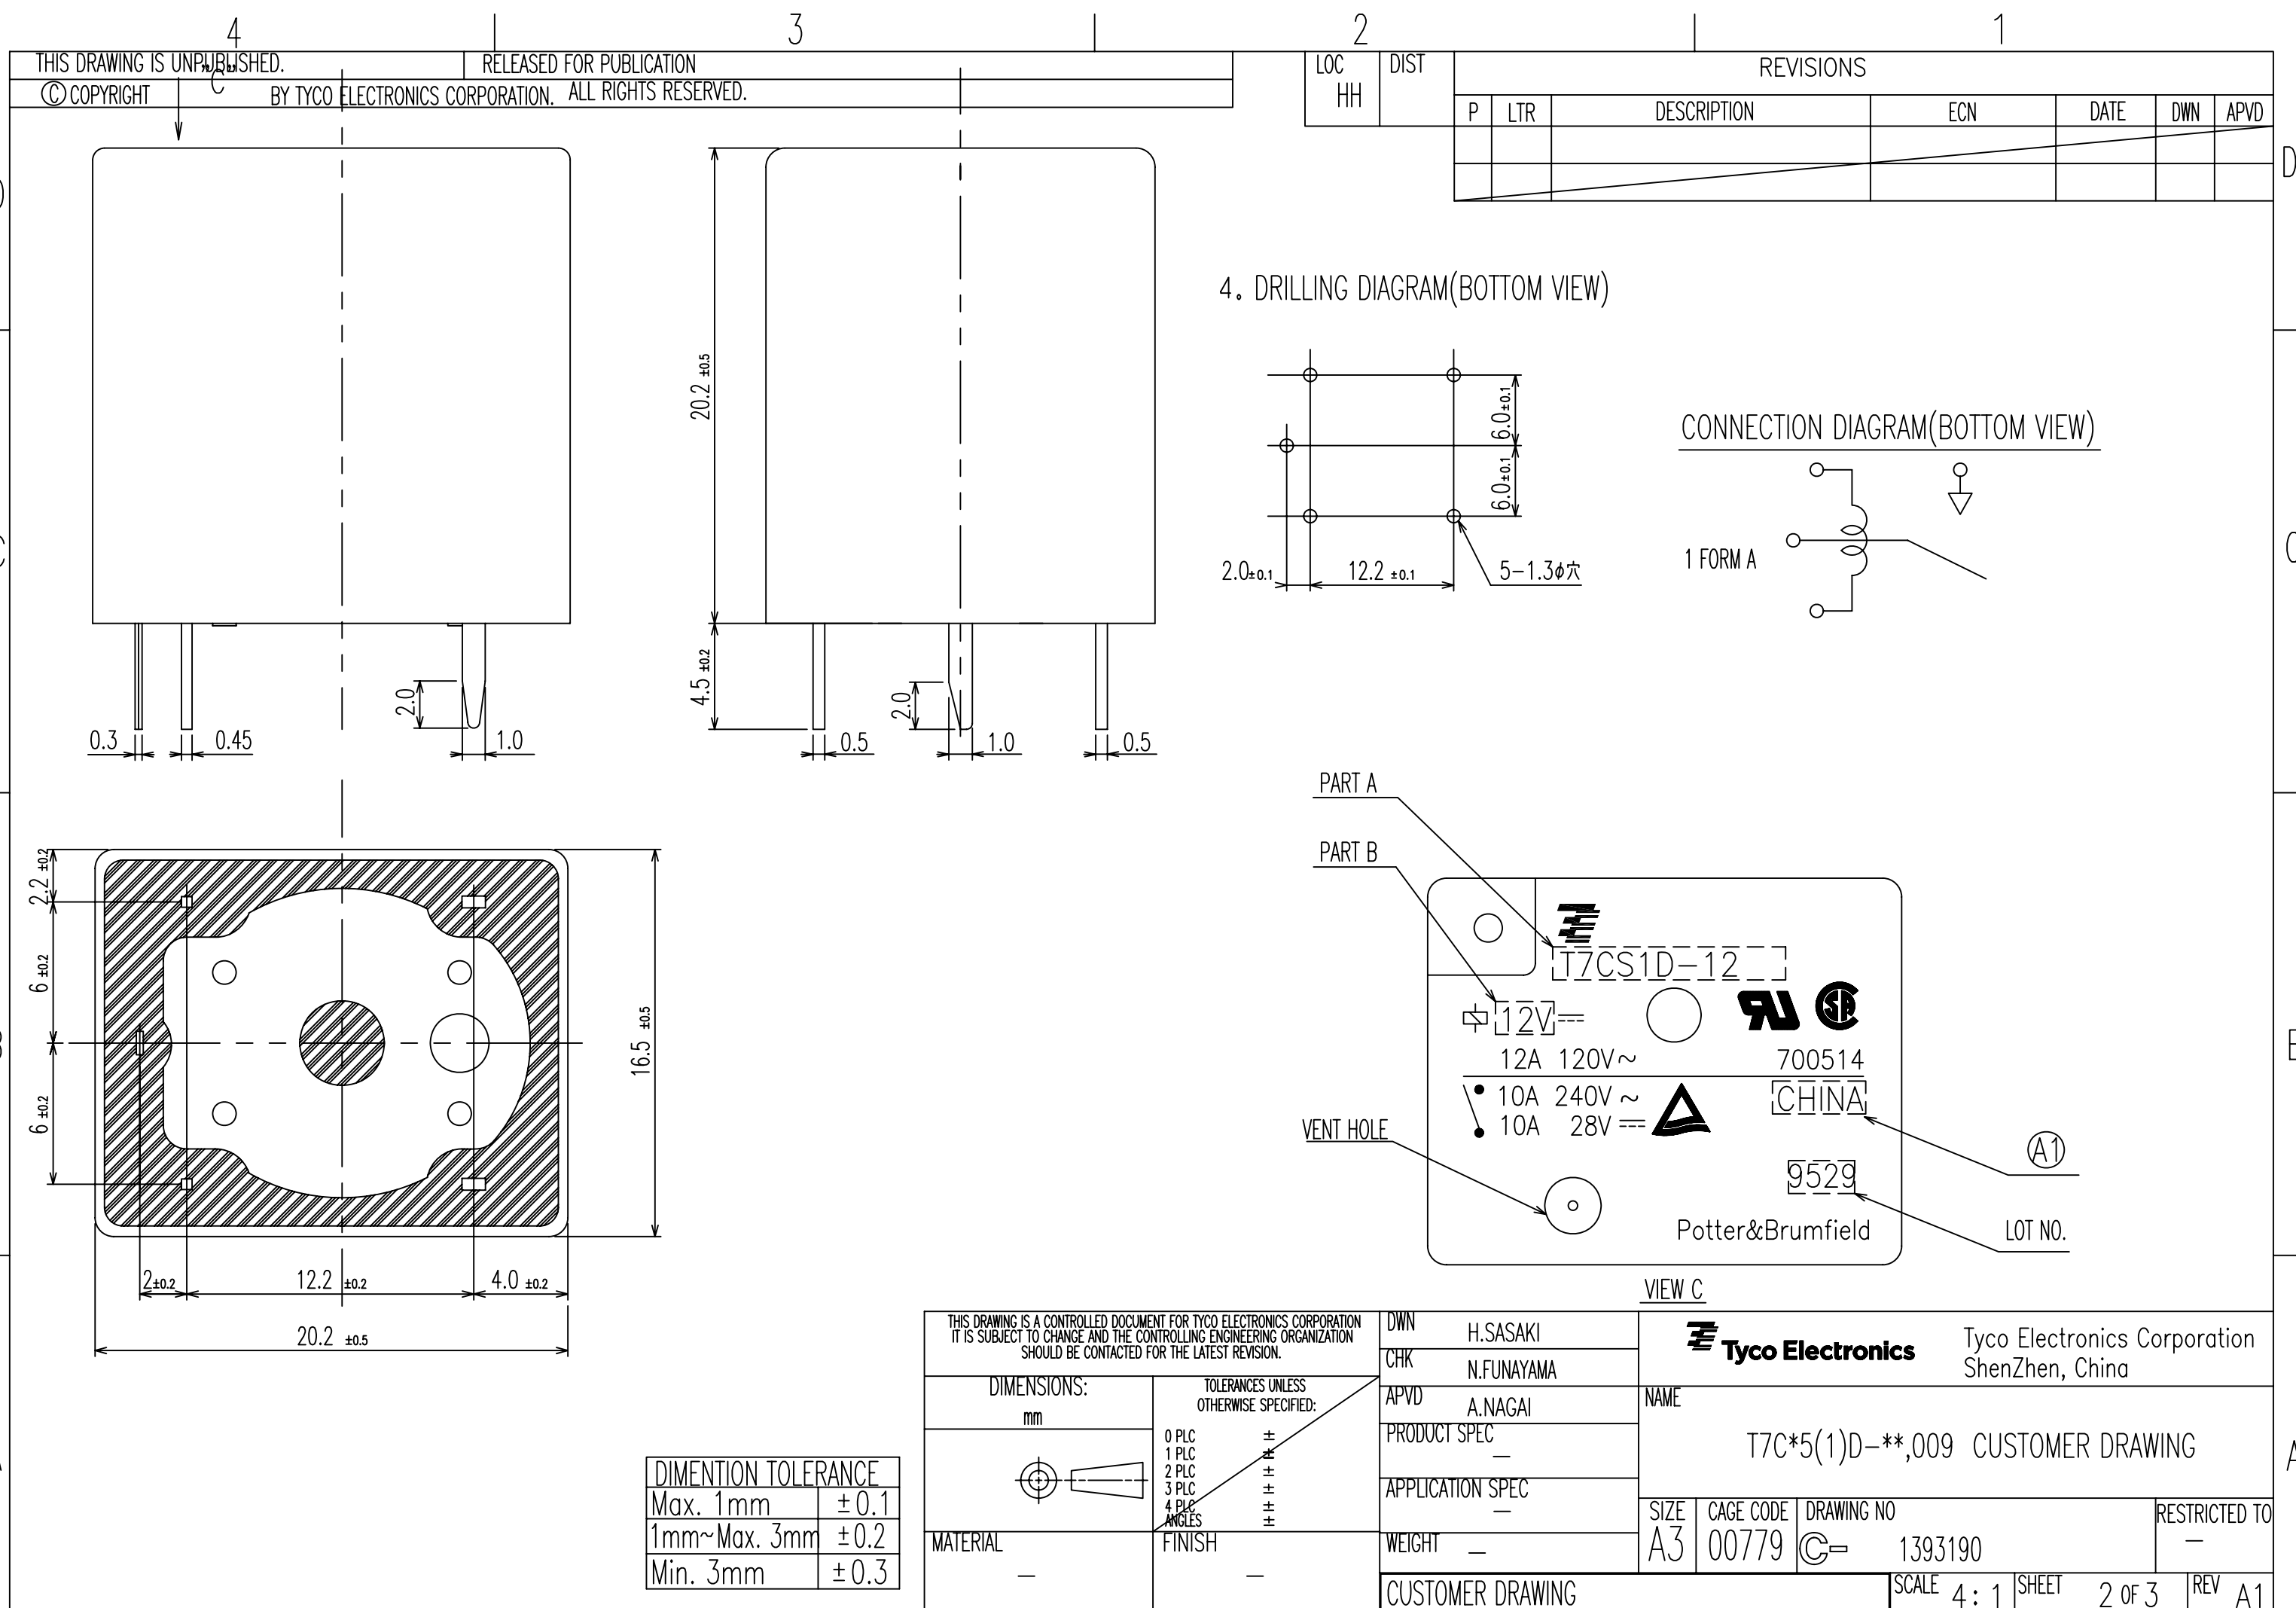


THIS DRAWING IS UNPUBLISHED.
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


RELEASED FOR PUBLICATION

LOC HH	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

4. DRILLING DIAGRAM(BOTTOM VIEW)

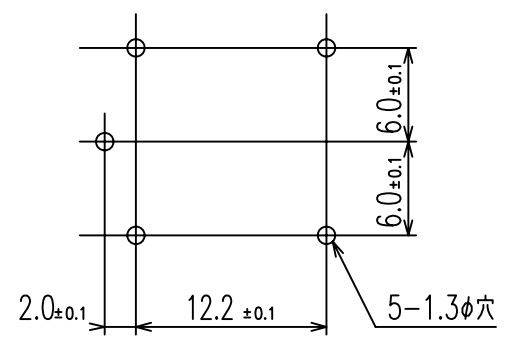

CONNECTION DIAGRAM(BOTTOM VIEW)

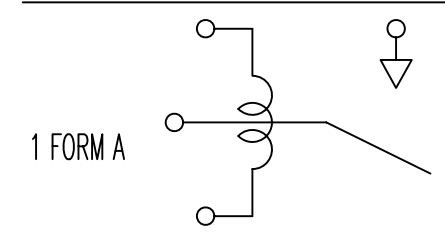

PART A

PART B

VENT HOLE

①

LOT NO.

VIEW C

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	H.SASAKI	Tyco Electronics Corporation ShenZhen, China	
		CHK	N.FUNAYAMA		
DIMENSIONS: mm		APVD	A.NAGAI	NAME T7C*5(1)D-**,009 CUSTOMER DRAWING	
		PRODUCT SPEC	—		
		APPLICATION SPEC	—	SIZE A3	
		WEIGHT	—	CAGE CODE 00779	DRAWING NO C= 1393190
MATERIAL —		FINISH —		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 3
				REV A1	

DIMENTION TOLERANCE	
Max. 1mm	±0.1
1mm~Max. 3mm	±0.2
Min. 3mm	±0.3

4

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT

3

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

2

LOC
HH

DIST

1

REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

A1

A1

FIGURE 11	4-1393190-3	24V	T7CV1D-24	t
FIGURE 11	4-1393190-1	12V	T7CV1D-12	s
FIGURE 11	1-1393190-2	24V	T7CS1D-24	r
FIGURE 11	1-1393190-0	12V	T7CS1D-12	q
FIGURE 1	6-1393190-3	48V	T7CV5D-48	p
FIGURE 1	6-1393190-0	24V	T7CV5D-24	o
FIGURE 1	5-1393190-6	18V	T7CV5D-18	n
FIGURE 1	5-1393190-3	12V	T7CV5D-12	m
FIGURE 1	4-1393190-9	9V	T7CV5D-09	l
FIGURE 1	4-1393190-7	6V	T7CV5D-06	k
FIGURE 1	4-1393190-6	5V	T7CV5D-05	j
FIGURE 1	4-1393190-5	3V	T7CV5D-03	i
FIGURE 1	3-1393190-1	48V	T7CS5D-48	h
FIGURE 1	2-1393190-8	24V	T7CS5D-24	g
FIGURE 1	2-1393190-5	18V	T7CS5D-18	f
FIGURE 1	2-1393190-2	12V	T7CS5D-12	e
FIGURE 1	2-1393190-0	9V	T7CS5D-09	d
FIGURE 1	1-1393190-9	6V	T7CS5D-06	c
FIGURE 1	1-1393190-8	5V	T7CS5D-05	b
FIGURE 1	1-1393190-7	3V	T7CS5D-03	a
FIGURE	TE PART NO	PART B	PART A	ITEM

RELAY TYPE

A1

	UV RESIN	UV SEAL(FOR SEALED TYPE)	14
	EPOXY RESIN	SEAL	13
	MW79	MAGNETIC WIRE	12
UL94 V-0	PBT	CASE	11
UL94 V-0 CLASS-F	PET	BOBBIN	10
	CP WIRE	COIL TERMINAL	9
	Ag ALLOY	STATIONARY CONTACT	8
	Ag ALLOY	MOVABLE CONTACT	7
	Cu ALLOY	NC TERMINAL	6
	Cu ALLOY	NO TERMINAL	5
	Cu ALLOY	MOVABLE SPRING	4
	STEEL	CORE	3
	STEEL	ARMATURE	2
	STEEL	YOKE	1
INCOMBUSTIBILITY	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm

DIMENTION TOLERANCE

Max. 1mm	±0.1
1mm~Max. 3mm	±0.2
Min. 3mm	±0.3

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL

—

FINISH

—

DWN
H.SASAKI

CHK
N.FUNAYAMA

APVD
A.NAGAI

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

Tyco Electronics Corporation
ShenZhen, China

NAME
T7C*5(1)D-**,009 CUSTOMER DRAWING

SIZE
A3

CAGE CODE
00779

DRAWING NO
C= 1393190

RESTRICTED TO
—

SCALE 4: 1 | SHEET 3 of 3 | REV A1