

ATTENUATORS

TNC, up to 18 GHz, 50 Watts

SPECIFICATIONS:

Models: XXT50W-XX, XXT50W-XXF & XXT50W-XXM

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18.0 GHz
Standard Freq. Values _____ 6 & 18 GHz
Standard dB Values* _____ 3, 6, 10, 20, 30 & 40 dB

Attenuation Accuracy	DC - 6 GHz	6 - 12.4 GHz	12.4 - 18 GHz
3, & 6 dB	±0.75 dB	±0.75 dB	±0.75 dB
10 & 20 dB	±0.75 dB	±0.75 dB	±1.00 dB
30 dB	±0.75 dB	±1.00 dB	±1.25 dB
40 dB	±1.00 dB	±1.25 dB	±1.50 dB

VSWR

	DC - 6 GHz	6 - 12.4 GHz	12.4 - 18 GHz
	1.25:1 Max.	1.35:1 Max.	1.45:1 Max.

Input Power _____ 50 Watts Avg. @ 25°C
Derated Linearly to 10 Watts @ +125°C

Peak Power _____ 500 Watts Max.
(5uSec Pulse, .05% Duty Cycle)

Impedance _____ 50 Ohms

Operating Temp Range _____ -65°C to +125°C


Mechanical:

TNC Connectors** _____ Passivated Stainless Steel
Mates with MIL-STD-348

Conductors _____ Gold Plated Beryllium Copper

Housing _____ Anodized Aluminum

**TNC Connectors are 18 GHz Mode-Free

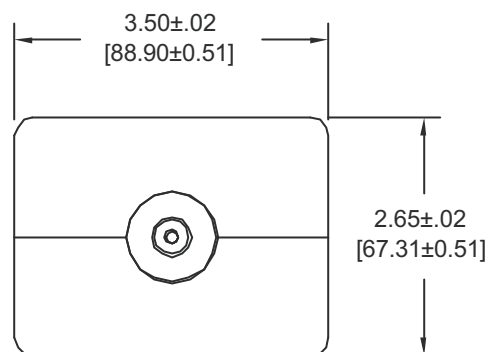

END VIEW
TYPICAL


Units must be Mounted in such a way as to
Allow for Free Air Flow Around fins to Insure
Performance

Note: Units are Unidirectional, Therefore Input Connector MUST be Specified & will be Indicated on Unit

Model Number: **XXT50W-XX**
Pictured

Model Number: **XXT50W-XXF**
Female/Female Connectors
Length: 4.75 ±.05 [120.7 ±1.3]

Model Number: **XXT50W-XXM**
Male/Male Connectors
Length: 4.56 ±.05 [115.8 ±1.3]

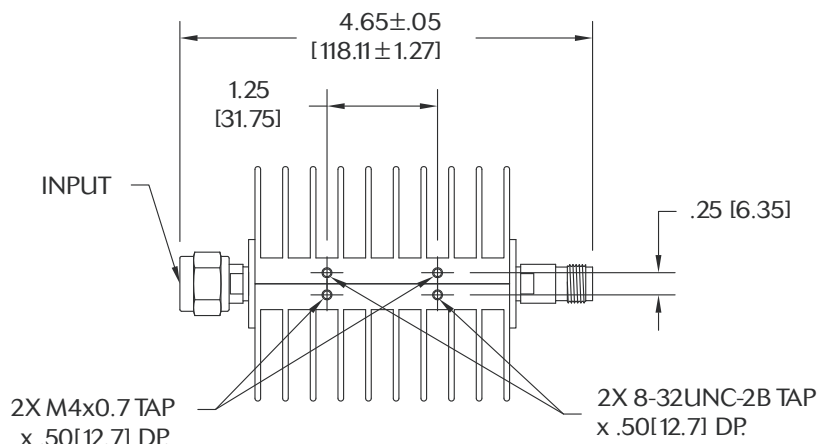

HOW TO ORDER:

Model Number: **XXT50W-XXY**

Freq. Range
6 = DC - 6 GHz
18 = DC - 18 GHz

Connector Configuration
= Male/Female (Male Input)
F = Fem/Fem
M = Male/Male
FM = Female/Male (Female Input)
dB Value

Ordering Examples:

Model Number: **18T50W-20**
DC - 18 GHz; 20 dB; TNC - Male/Fem (Male Input)

Model Number: **6T50W-03F**
DC - 6 GHz; 3 dB; TNC - Fem/Fem

Model Number: **6T50W-10FM**
DC - 6 GHz; 10 dB; TNC - Fem/Male (Female Input)

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

XXT50W-XX: REV F (M)

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com