



AF100B03004


BeO Flange Attenuator

Power: 100 Watts (CW)
Attenuation: 30 dB $\pm$ 1.0 dB
VSWR: 1.25:1
Frequency Range: DC to 3.5 GHz
Substrate: BeO




TYPICAL PERFORMANCE

RETURN LOSS

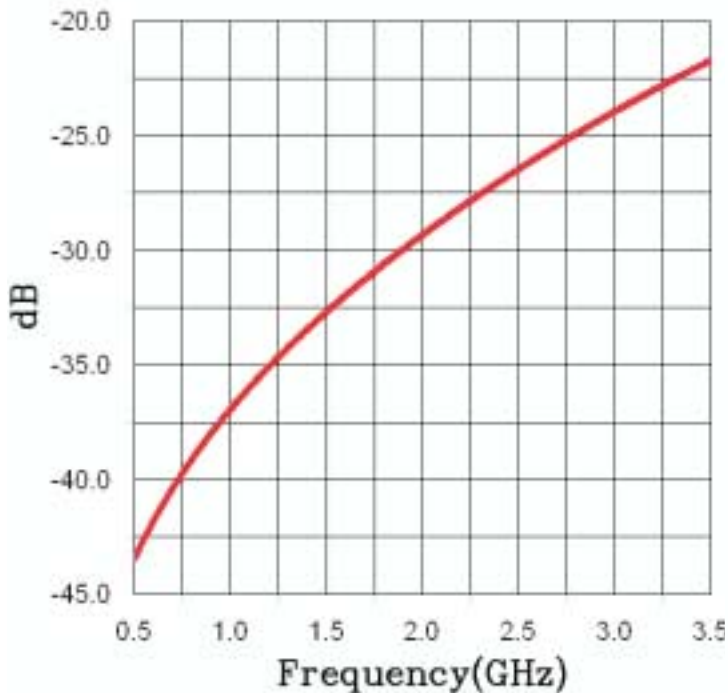

ATTENUATION

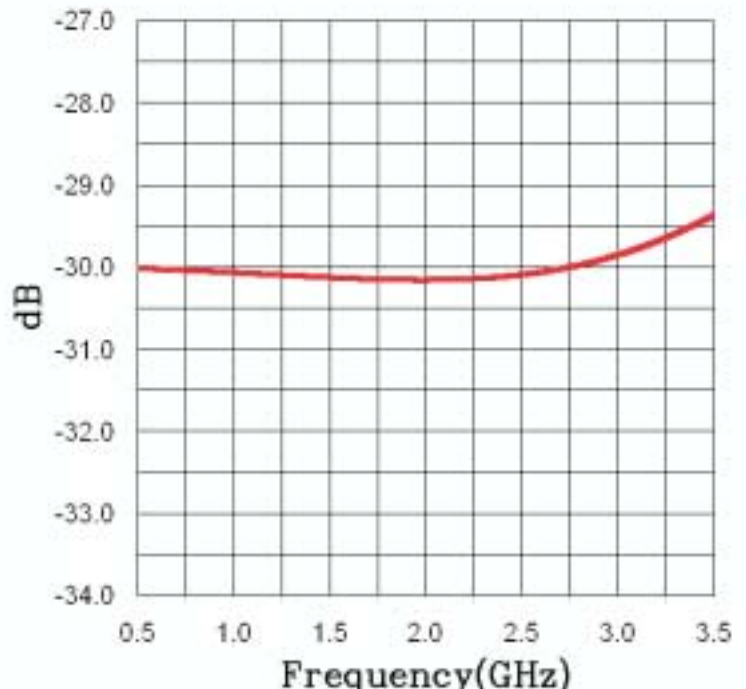

For detailed information regarding this product or sample request contact Johanson Sales




Johanson Manufacturing Corporation • 301 Rockaway Valley Road, Boonton, New Jersey 07005 • Phone 973.334.2676 • Fax 973.334.2954
STAY TUNED • ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION • WWW.JOHANSONMFG.COM

Nov 08



AF100B03004

BeO Flange Attenuator

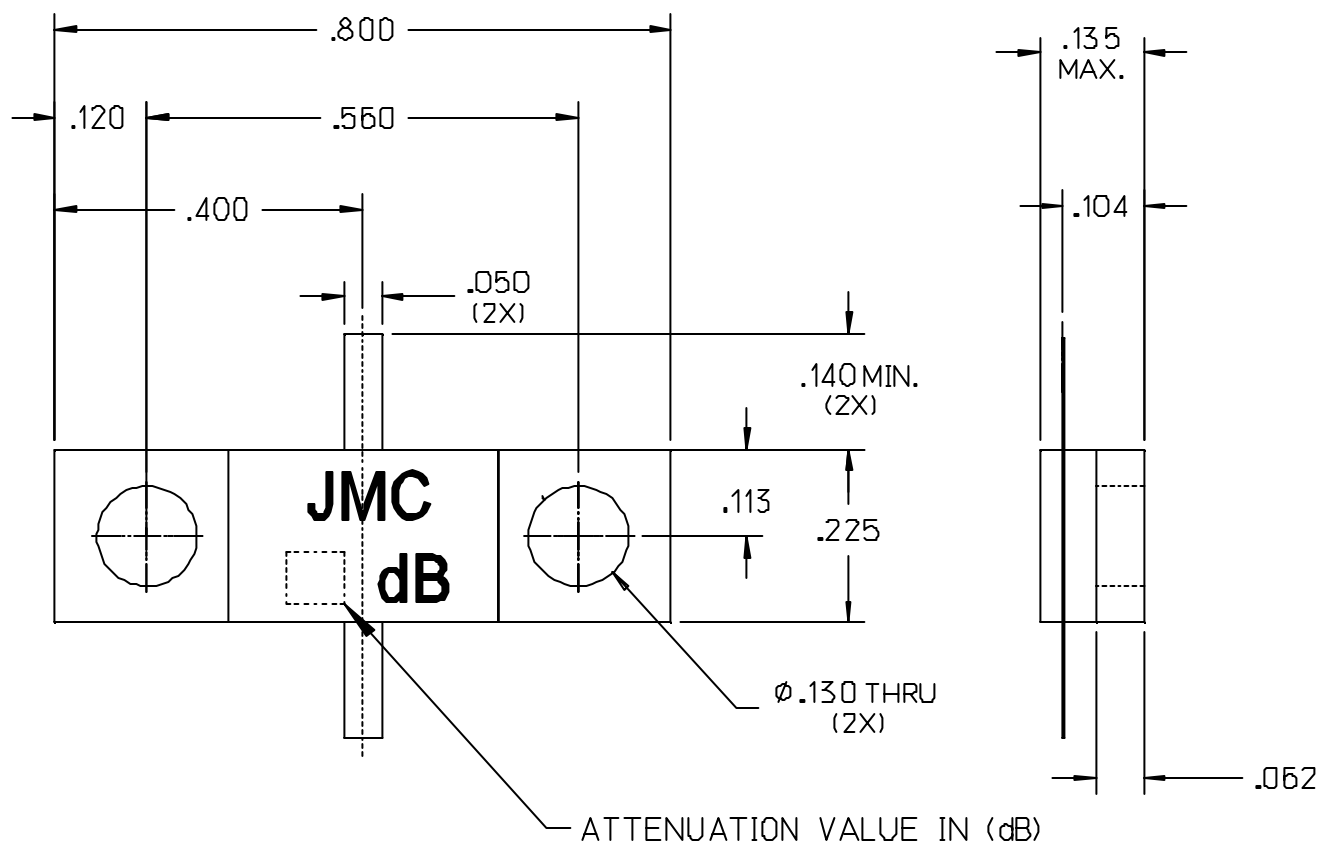

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

For detailed information regarding this product or sample request contact Johanson Sales



Johanson Manufacturing Corporation • 301 Rockaway Valley Road, Boonton, New Jersey 07005 • Phone 973.334.2676 • Fax 973.334.2954
STAY TUNED • ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION • WWW.JOHANSONMFG.COM

Nov 08