
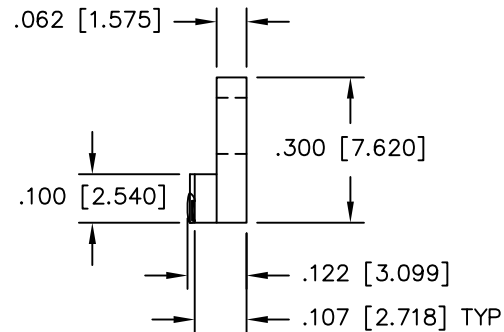


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3715	A	INITIAL RELEASE	DG	6-12

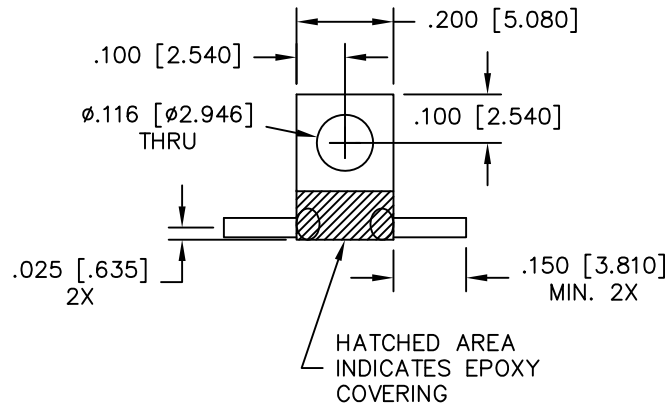


NOTES:

- LEADS 99.99% PURE SILVER
.040 [1.016] WIDE X .005 [.127] THICK.
- SUBSTRATE MATERIAL: BeO
COVER MATERIAL: EPOXY
- FLANGE MATERIAL: COPPER
PLATING: NICKEL

ELECTRICAL SPECIFICATIONS

NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY: DC – 6.0 GHz.
VSWR: 1.30:1
INPUT POWER: 10 WATTS
TEMPERATURE: –55°C TO 150°C

PART NO.	VALUE	TOLERANCE
IPP-AB201-2	2 dB	±.50 dB
IPP-AB201-4	4 dB	±.50 dB
IPP-AB201-6	6 dB	+0.75 –0.50 dB
IPP-AB201-7	7 dB	+0.75 –0.50 dB
IPP-AB201-8	8 dB	+0.75 –0.50 dB
IPP-AB201-9	9 dB	+1.00 –0.50 dB
IPP-AB201-10	10 dB	+1.00 –0.50 dB
IPP-AB201-11	11 dB	+1.00 –0.50 dB
IPP-AB201-20	20 dB	+1.50 –0.50 dB

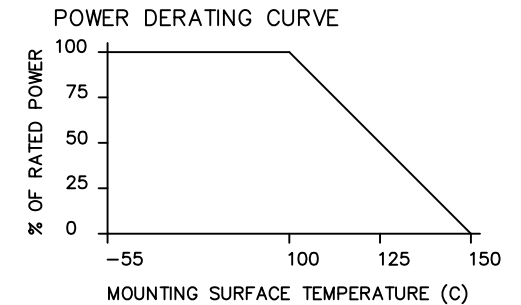

MATERIAL 23	DWN S.Cornell	DATE 6-8-12	Innovative Power Products			
	ENG DG	DATE 6-12				
FINISH 3	MANUF	DATE	TITLE ATTENUATOR, 10 WATT, FLANGE			
	CAGE CODE: 437R2					
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	SHEET 1	OF 1	SCALE 4:1	SIZE B	P/N IPP-AB201-XX	REV. A