
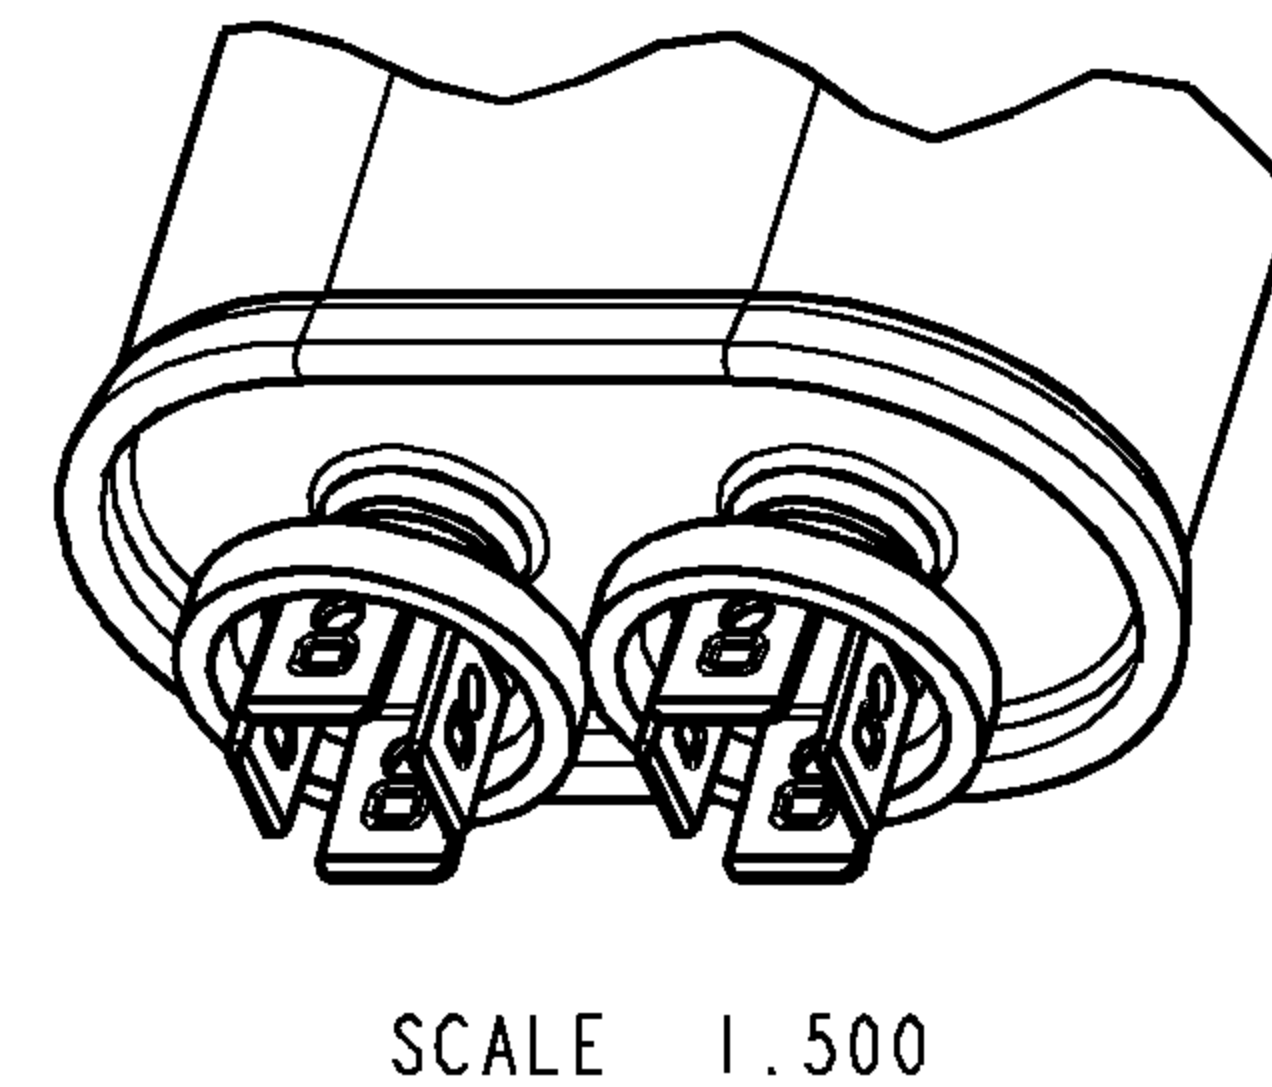
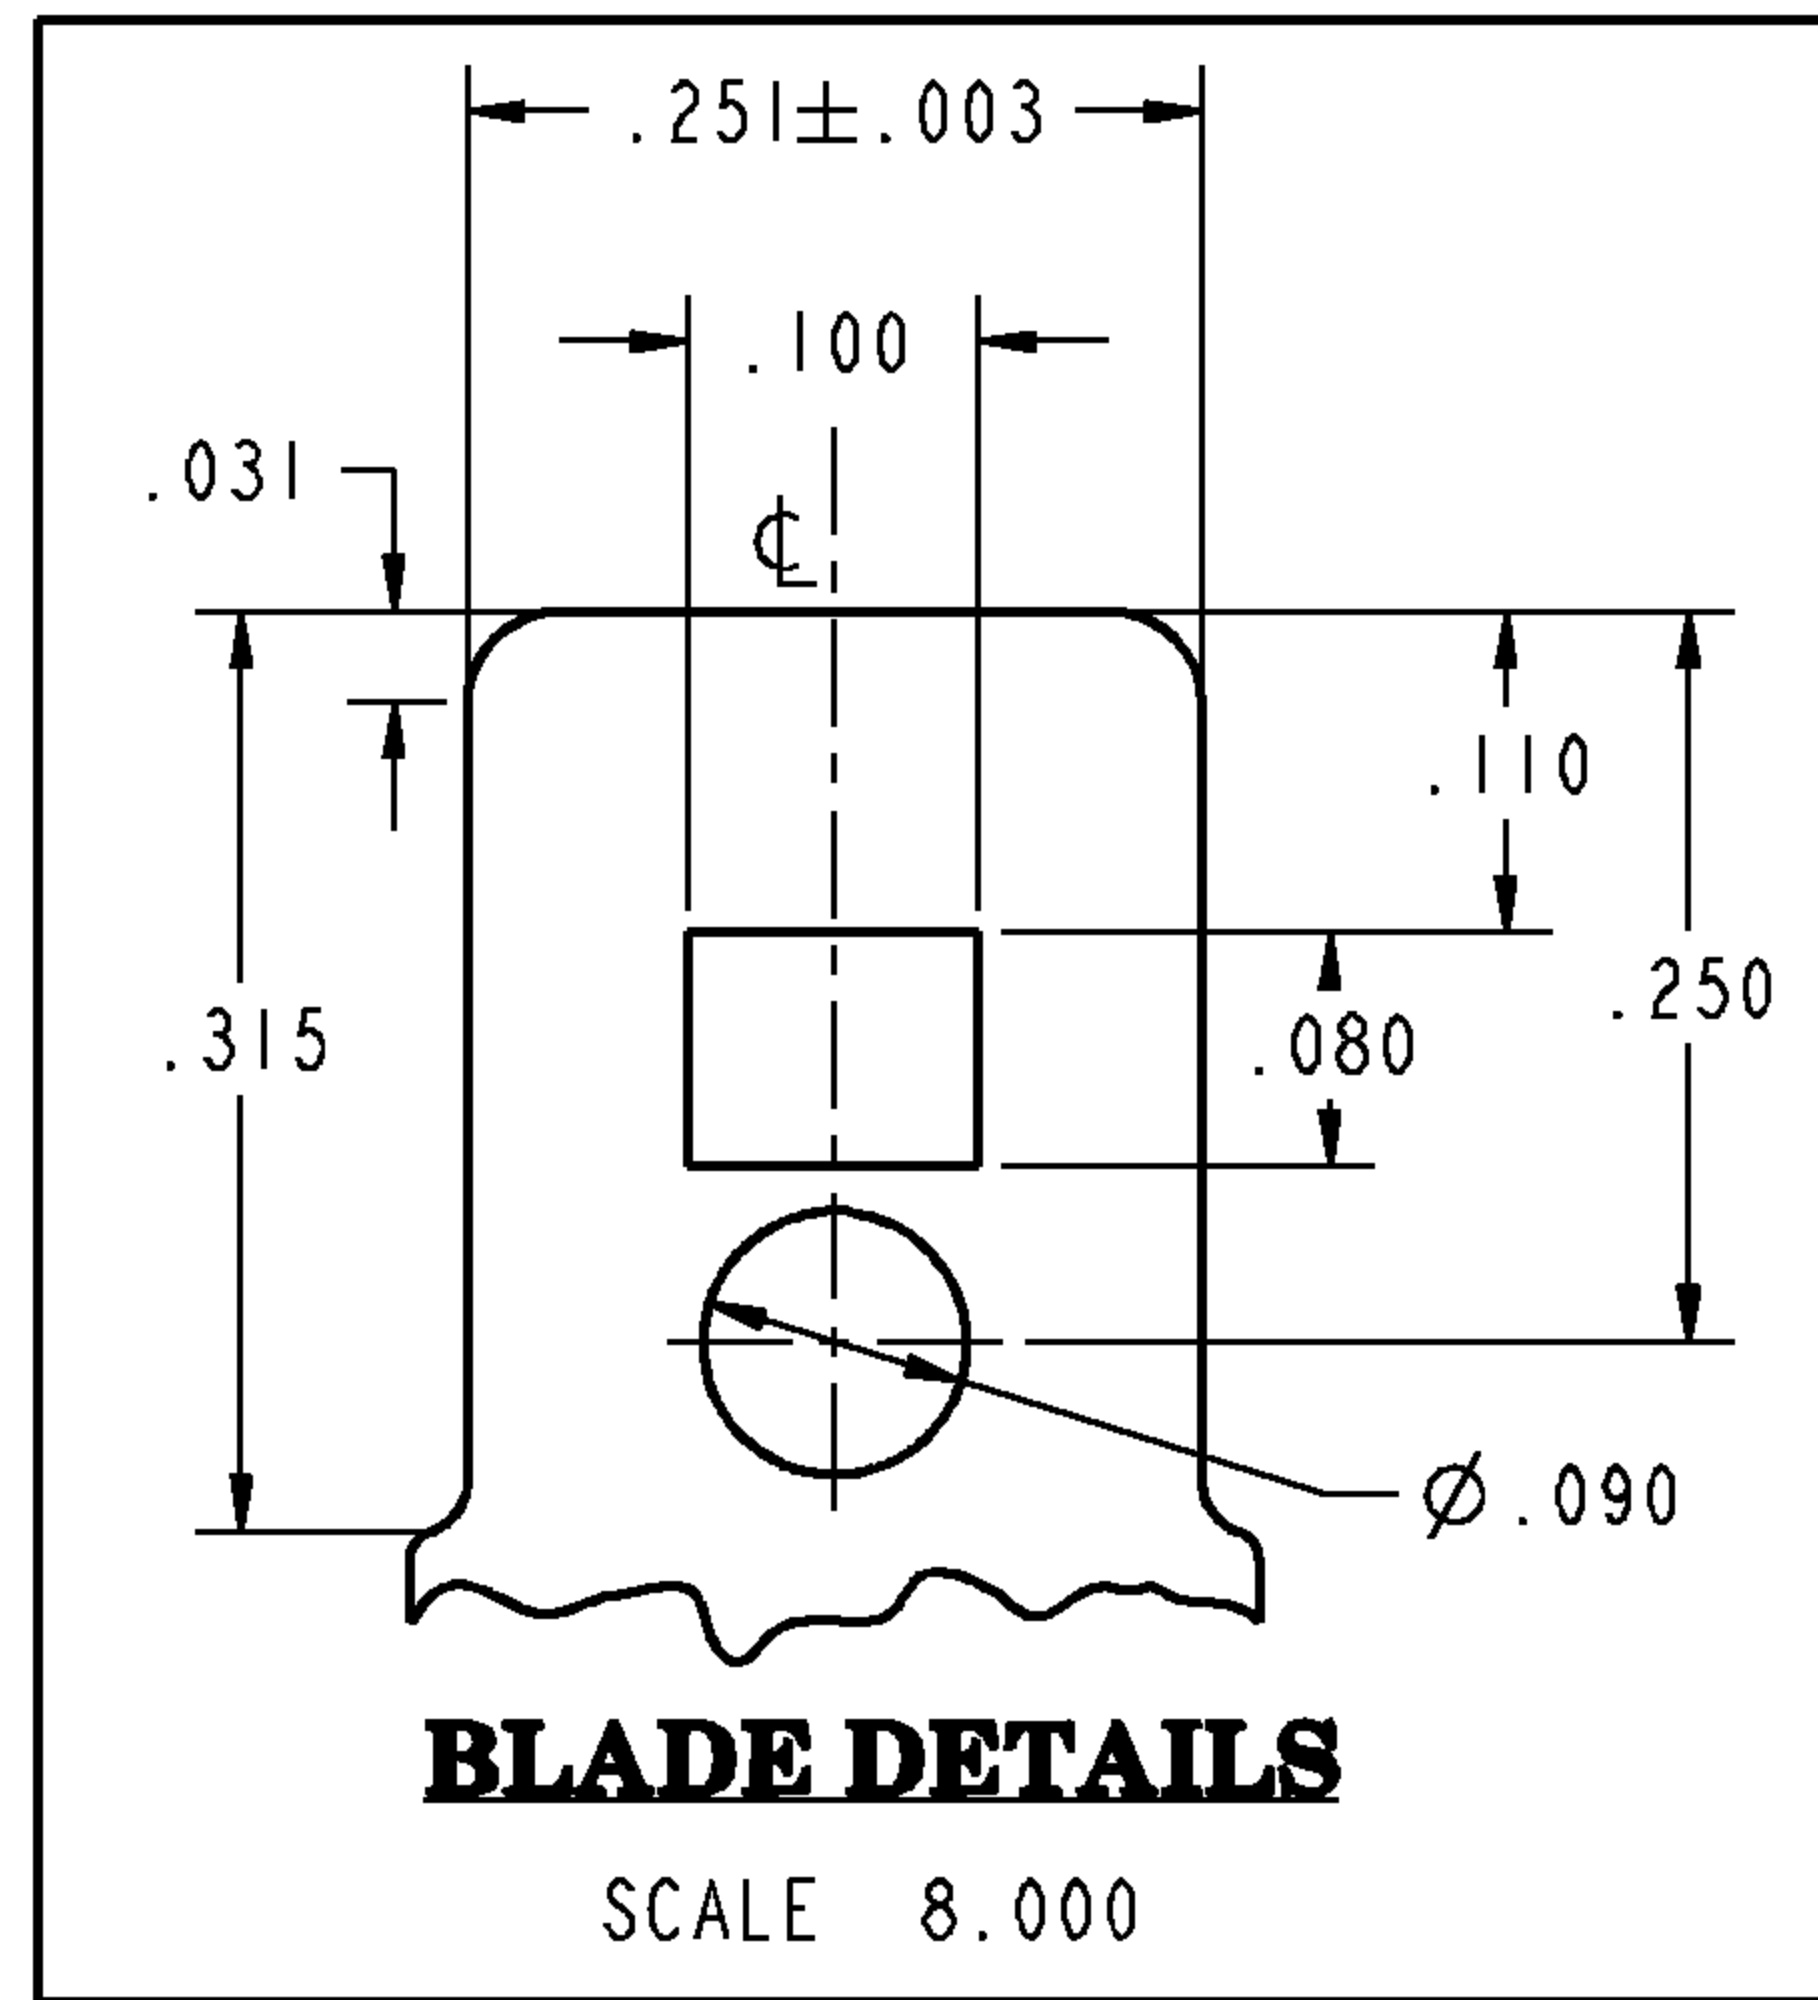


NAME: 100006199 OBJECT: 2T_CAPACITOR_ASM DATE: 30-Jul-08 14:04:28

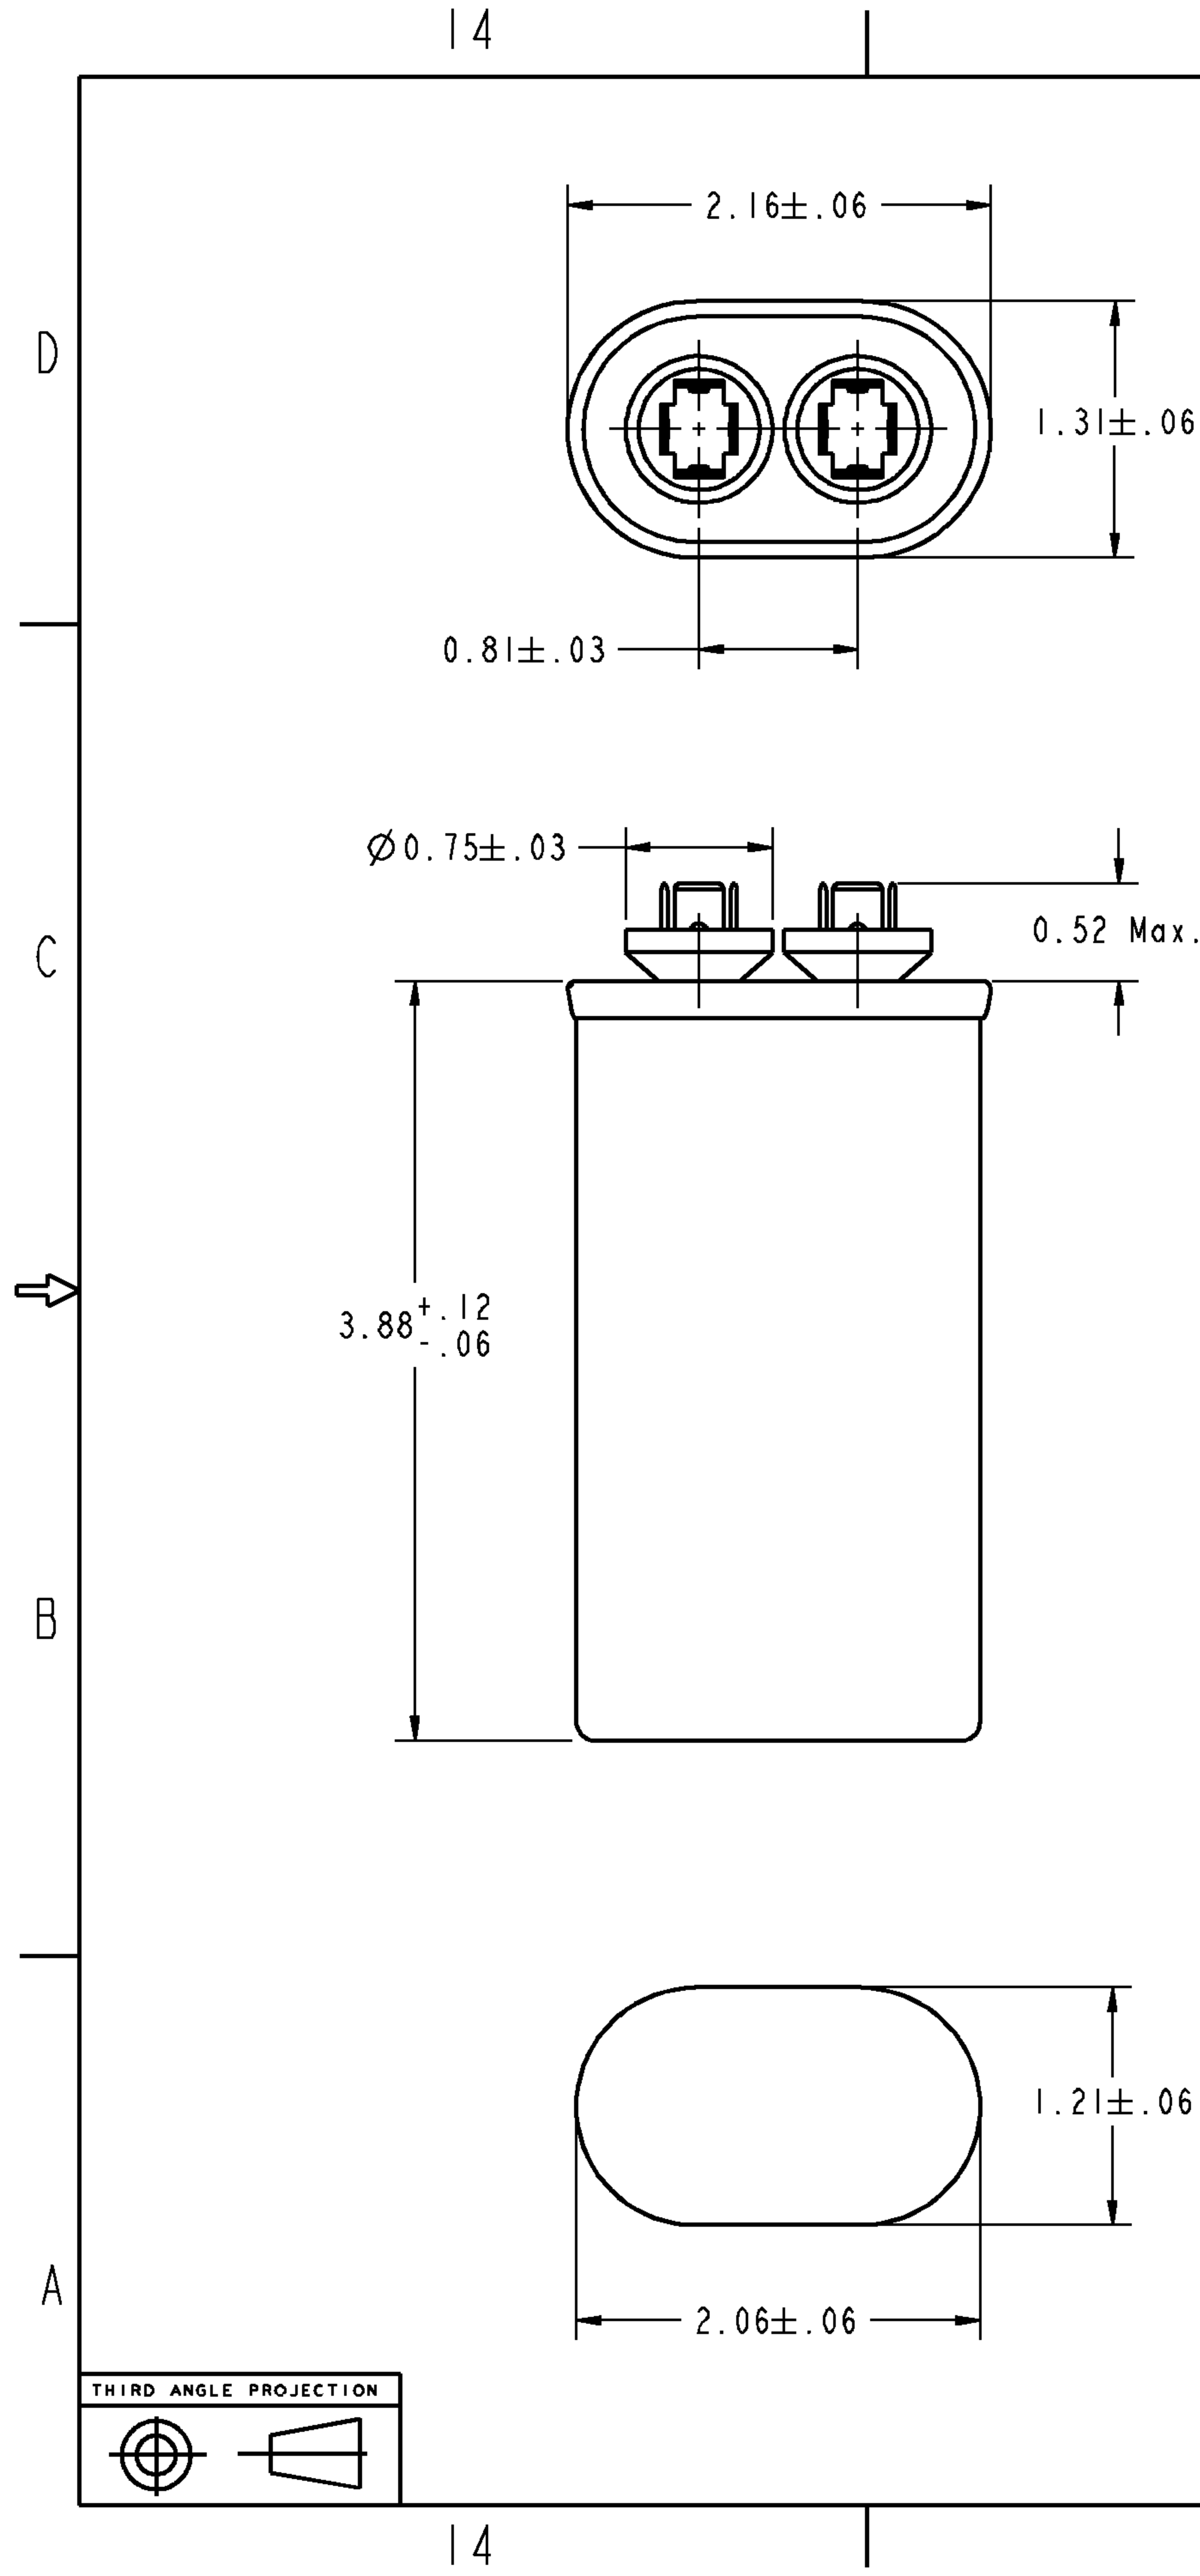

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 7.50 μ F $\pm$ 6%
Secondary Capacitance	: NIL
Volts	: 440AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: STEEL TIN PLATED
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PSI A10000AFC

FOR ADDITIONAL INFO REFER TO:			SIGNATURES		DATE	 REGAL-BELOIT CORPORATION TITLE GEM III CAPACITOR OUTLINE DRAWING
APPLIED PRACTICES	MODEL	NPS	07/25/08			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			DETAIL	NPS	07/25/08	
TOLERANCE ON:			CHECKED	HV	07/25/08	
1 PL DECIMALS $\pm$ 0.1			ENGRG	-	-	
2 PL DECIMALS $\pm$ 0.01			MFG	-	-	SIZE C
3 PL DECIMALS $\pm$ 0.001			QUALITY	-	-	
ANGLES $\pm$ 0.5			ISSUED	-	-	
FRACTIONS $\pm$						DRAWING 97F9036
FINISH						REV 2
MATERIAL			SOLID MODEL: 2TCAPACITOR_ASM			SCALE: 1.250
						REF. No: .
						SHEET 1 OF 1