
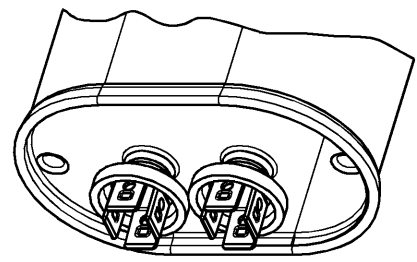
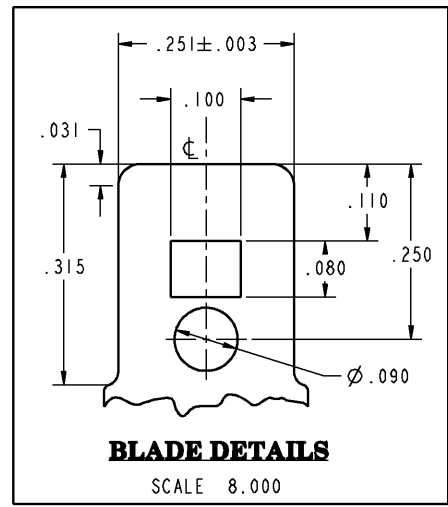


NAME: 501221413 OBJECT: 2T_CAPACITOR_ASM DATE: 21-Nov-05 12:59:16

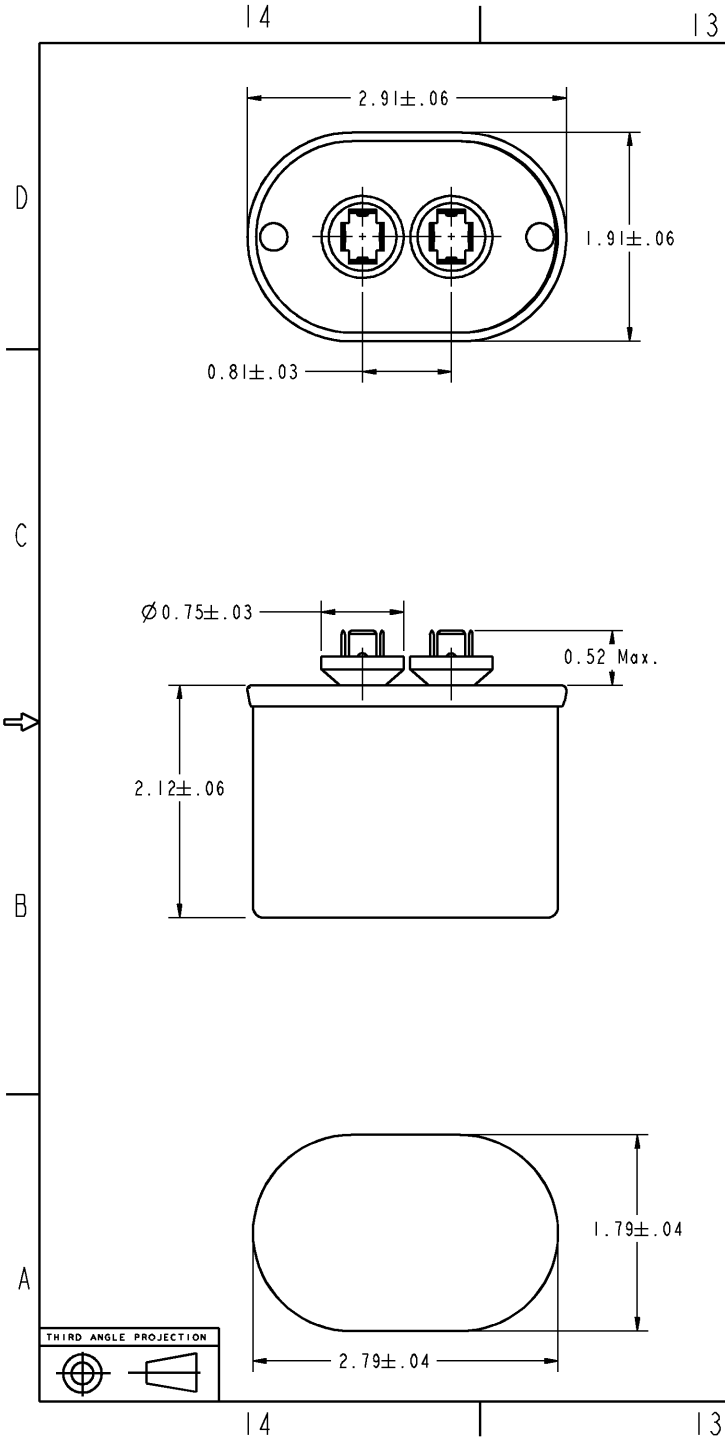

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 15.00 μ F $\pm$ 6%
Secondary Capacitance	: NIL
Volts	: 370AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: TERNPLATE
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE	 REGAL-BELOIT CORPORATION
APPLIED PRACTICES	MODEL	RAGHU.P.H		05/14/03	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DETAIL	RAGHU.P.H		05/14/03	
TOLERANCE ON:	CHECKED	RAGHU.P.H		05/21/03	
1 PL DECIMALS $\pm$ 0.1	ENGRG	-		-	
2 PL DECIMALS $\pm$ 0.01	MFG	-		-	GEM III CAPACITOR OUTLINE DRAWING
3 PL DECIMALS $\pm$ 0.001	QUALITY	-		-	
ANGLES $\pm$ 0.5	ISSUED	-		-	
FRACTIONS $\pm$					SIZE DRAWING
FINISH					C
MATERIAL	SOLID MODEL: 2TCAPACITOR.ASM				SCALE: 1.250
					REF. No: .
					SHEET 1 OF 1