

14

13

12

C






97F9626

1

1

THIS DRAWING IS THE PROPERTY OF REGAL-BELLOTT CORPORATION. IT IS TO BE USED FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREON. IT IS TO BE KEPT IN THE OFFICE OF THE DESIGN ENGINEER OR HIS SUCCESSOR. IT IS TO BE DESTROYED WHEN THE PRODUCT IS NO LONGER IN PRODUCTION. IT IS TO BE KEPT IN THE OFFICE OF THE DESIGN ENGINEER OR HIS SUCCESSOR. IT IS TO BE DESTROYED WHEN THE PRODUCT IS NO LONGER IN PRODUCTION.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	Modified per ECM NO. 0627.	11/11/05	RV

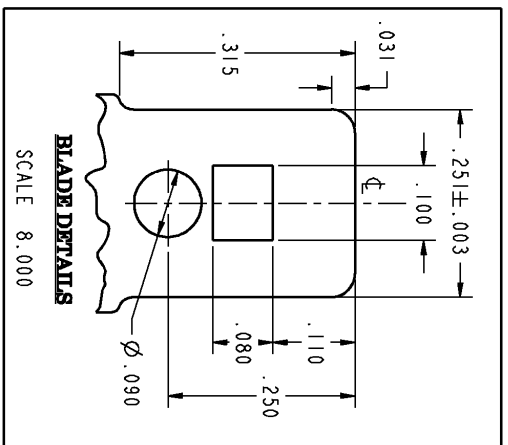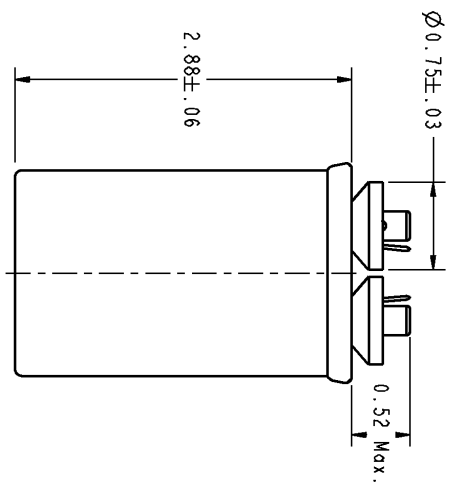

SPECIFICATIONS:

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 15.00uF ±6%
Secondary Capacitance	: NIL
Volts	: 440AC
Leakage Current	: 30uA Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: TERNPLATE
Terminals	: 0.250"X0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE	
APPROVED	MODEL	DATE	DATE	DATE	DATE
DESIGNED	MODEL	DATE	DATE	DATE	DATE
CHECKED	MODEL	DATE	DATE	DATE	DATE
ENGINEER	MODEL	DATE	DATE	DATE	DATE
WFO	MODEL	DATE	DATE	DATE	DATE
QUALITY	MODEL	DATE	DATE	DATE	DATE
ISSUED	MODEL	DATE	DATE	DATE	DATE
FINISH	MODEL	DATE	DATE	DATE	DATE

REGAL-BELLOTT CORPORATION
GEM III CAPACITOR
OUTLINE DRAWING
97F9626
SHEET 1 OF 1