

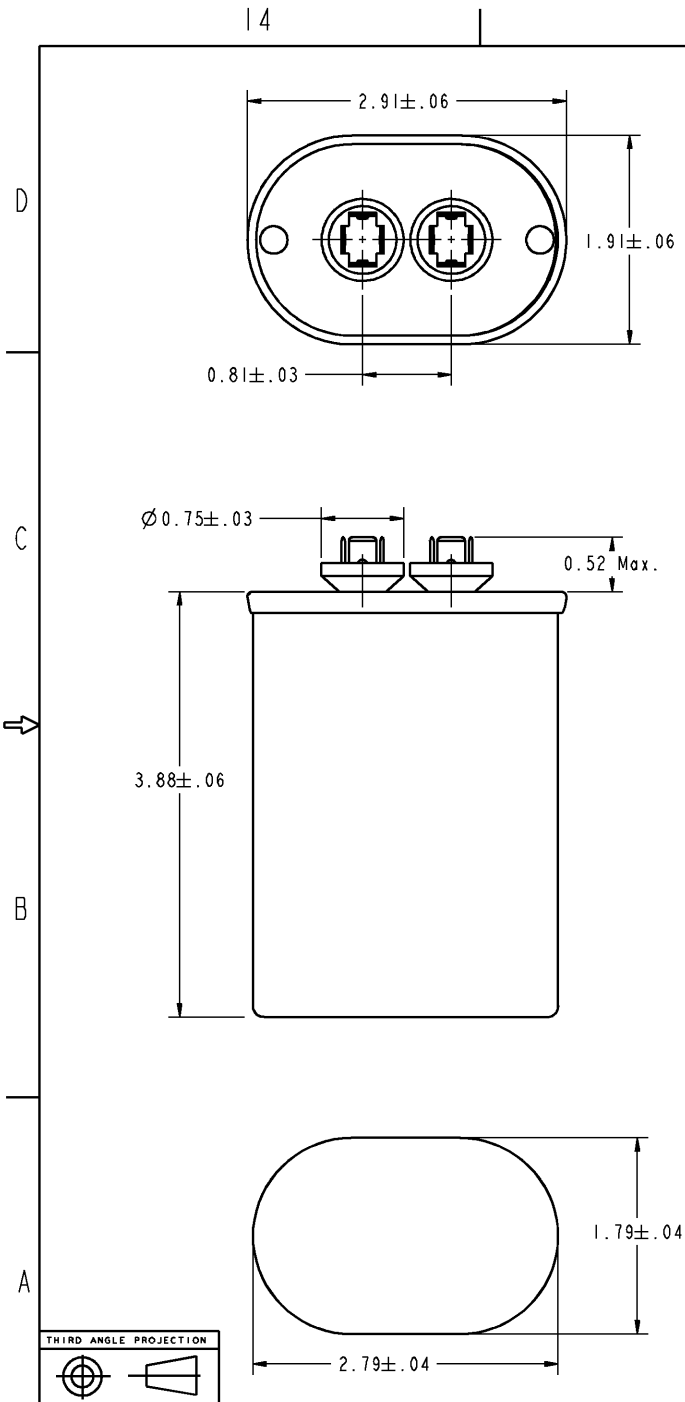


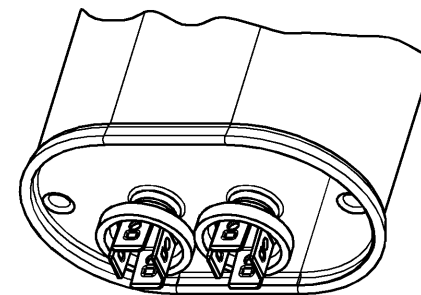

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION

This document is the property of REGAL BELOIT CORPORATION ("REG") including its subsidiaries and divisions and contains proprietary information of REG. This document is loaned on the express condition that neither you nor the firm you represent use this information in any way without the express written consent of REG, and that the information shall be returned to REG upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

		SIZE DRAWING NO.		REV		SHEET	
		C		97F9637		I I	
REVISIONS							
REV.	DESCRIPTION			DATE		APPROVE	
I	Modified per ECN NO. 0627.			11/11/05		HW	

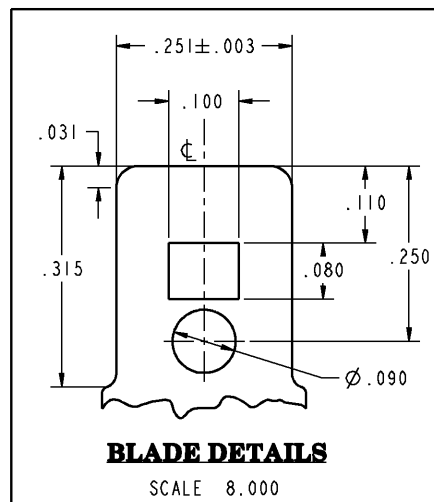

SCALE 1:500

SPECIFICATIONS:

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 30.00μF ±6%
Secondary Capacitance	: NIL
Volts	:440AC
Leakage Current	:30μA Max.
Frequency	:50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	:60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	:0.1% MAX.
Case Material	:ALUMINIUM
Cover Material	:TERNPLATE
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	:DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE		 REGAL-BELOTT CORPORATION	
APPLIED PRACTICES		MODEL		RAGHU. P.H			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DETAIL		RAGHU. P.H		05/14/03	
TOLERANCE ON:		CHECKED		RAGHU. P.H		05/21/03	
1 PL DECIMALS ± 0.1		ENGRG		-		-	
2 PL DECIMALS ± 0.01		WFG		-		-	
3 PL DECIMALS ± 0.001		QUALITY		-		-	
ANGLES ± 0.5		ISSUED		-		-	
FRACTIONS ±							
FINISH							
✓							
MATERIAL		SOLID MODEL: 2TCAPACITOR.ASM		SCALE: 1:250		REF. No: .	
						SHEET 1 OF 1	

TITLE

 **REGAL-BELOTT CORPORATION**

GEM III CAPACITOR

OUTLINE DRAWING

SIZE

DRAWING

C

97F9637

REV

I