


MI DRG. NO.	7168L	REV.	L
GLASS TRIMMER CAPACITOR			

SPECIFICATIONS		FILE: AIROUT
CAPACITY RANGE	0.5pF TO 5.0pF	
WORKING VOLTAGE	2500 VDC & 2500 V. PEAK R.F. @ 30 MHz (TEST 7000 VDC)	
CURRENT @ 30 MHz	2.0 AMPS (MAX)	
Q @ 20 MHz	> 2000	
INSULATION RESISTANCE	> 10 ⁶ MEGOHMS	
TEMPERATURE RANGE	-40°C TO + 200°C	
TUNING TORQUE	1.0 TO 5.0 OZ. IN	
430°F SOLDER USED IN ASSEMBLY		
GOLD, SILVER & CHROMATE FINISH		
QUARTZ DIELECTRIC		



L	7/2308	RJV	-	-	000686
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	RJV	CHK.	RJV	APP.	MAI
DATE	7/23/08	DATE	7/23/08	DATE	7/23/08
				SCALE	2" = 1"
				.XX ± .015	.XXX ± .005

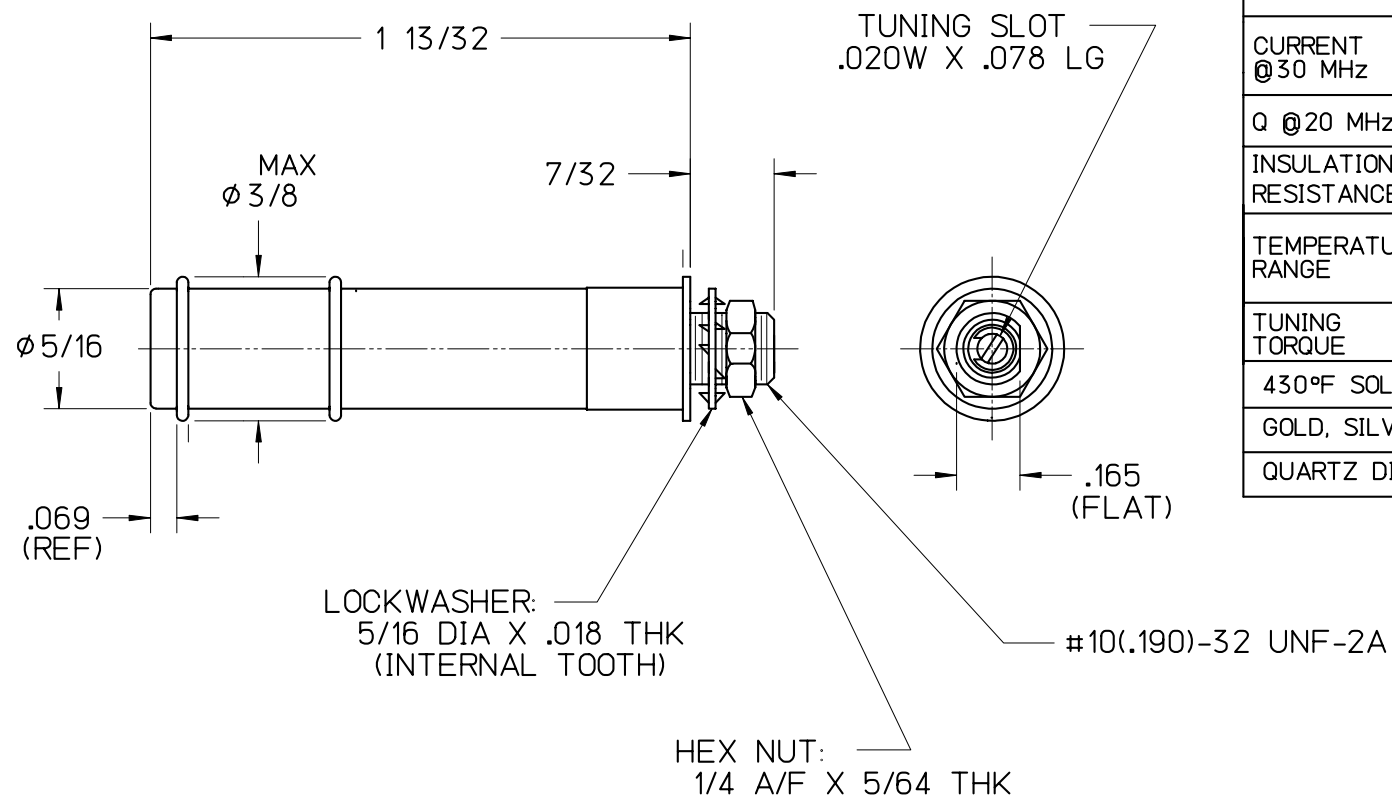

JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL