


MI DRG. NO.	7584E	REV.	E
GLASS TRIMMER CAPACITOR			



SPECIFICATIONS		FILE: AIROUT
CAPACITY RANGE	0.8pF TO 10pF	
WORKING VOLTAGE	2500 VDC & 2500 V. PEAK R.F. @ 30 MHz (TEST 10 KVDC)	
CURRENT @ 30 MHz	2.0 AMPS (MAX)	
Q @ 20 MHz	> 3000	
INSULATION RESISTANCE	> 10 ⁶ MEGOHMS	
TEMPERATURE RANGE	-40°C TO +125°C	
TUNING TORQUE	1.0 TO 5.0 OZ. IN	
NON-MAGNETIC STRUCTURE		
430°F SOLDER USED IN ASSEMBLY		
GOLD, SILVER & CHROMATE FINISH		
QUARTZ DIELECTRIC		

E	08/01/06	MLD	-	-	000393
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MLD	CHK.	MAI	APP.	MAI
DATE	DATE	DATE	DATE	DATE	DATE
08/01/06	08/30/06	08/30/06	08/30/06	08/30/06	08/30/06
					SCALE
					2" = 1"
					.XX ± .015
					.XXX ± .005

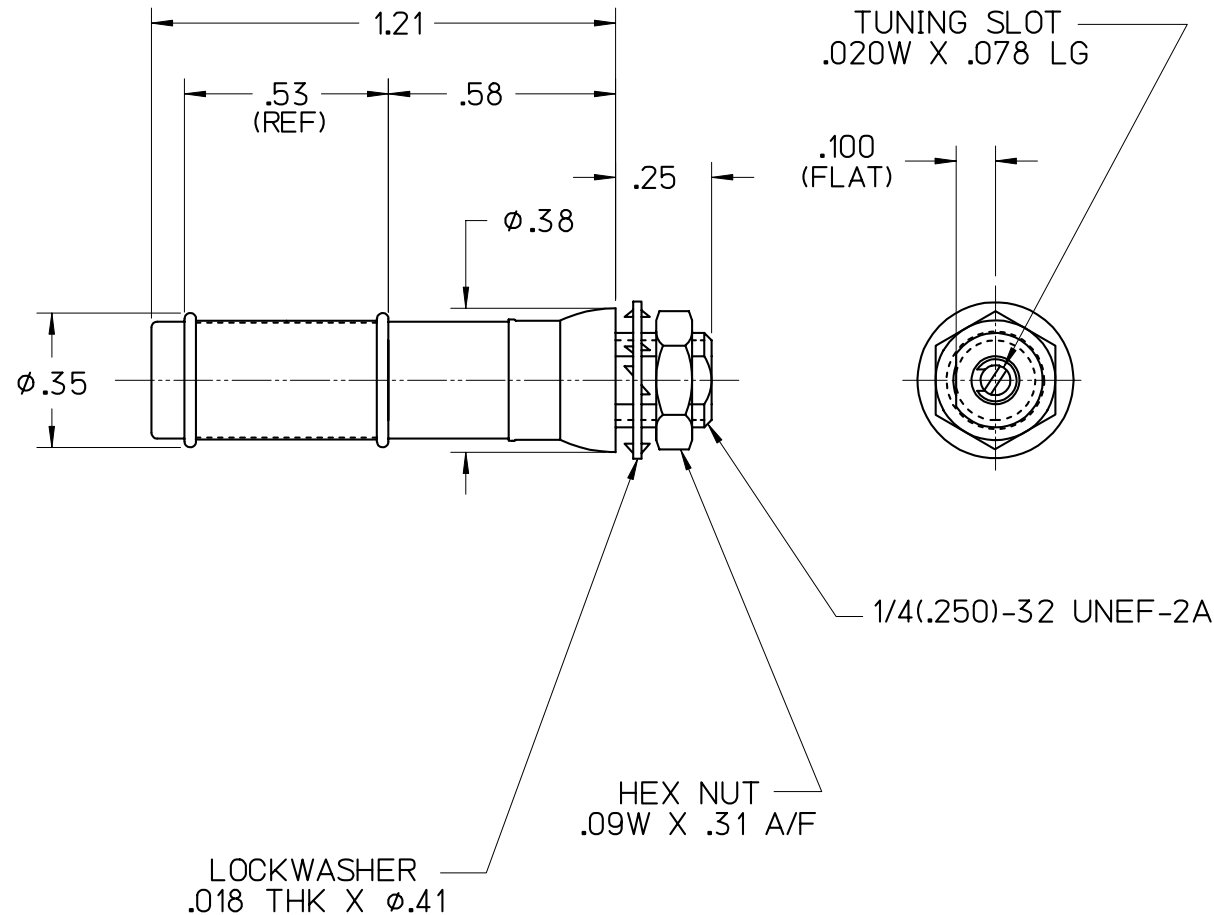

JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL