


GLASS TRIMMER CAPACITOR

SPECIFICATIONS		FILE: AIROUT
CAPACITY RANGE	0.8pF TO 10pF	
WORKING VOLTAGE	2500 VDC & 2500 V. PEAK R.F. @ 30 MHz (TEST 10 KVDC)	
CURRENT @ 30 MHz	2.0 AMPS (MAX)	
Q @ 20 MHz	> 3000	
INSULATION RESISTANCE	> 10 ⁶ MEGOHMS	
TEMPERATURE RANGE	-40°C TO + 200°C	
TUNING TORQUE	1.0 TO 5.0 OZ. IN	
NON-MAGNETIC STRUCTURE		
430°F SOLDER USED IN ASSEMBLY		
GOLD, SILVER & CHROMATE FINISH		
QUARTZ DIELECTRIC		
NOTE: ϕ.025 (#22 AWG), COPPER TERMINATION, SILVER PLATED.		

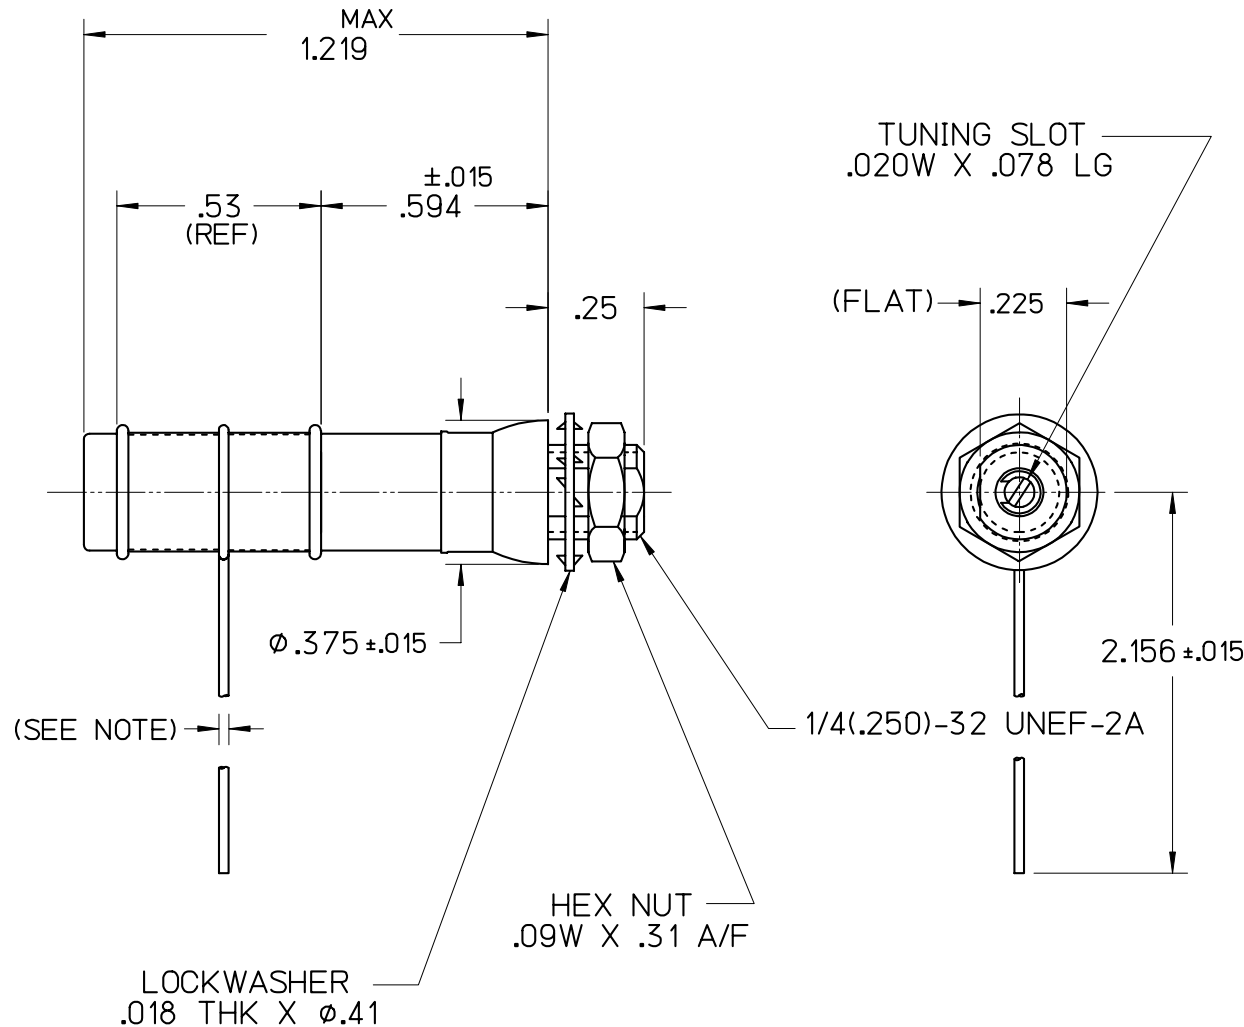

K	08/01/06	MLD	MAI	MAI	000393
J	04/22/03	RJV	RJV	JHT	030-054
H	09/03/02	MLD	-	-	020-079
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	MLD	CHK.	RJV	APP.	JHT	SCALE	2" = 1"
DATE	09/03/02	DATE	10/02/02	DATE	10/07/02	.XX ± .015	.XXX ± .005



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION