
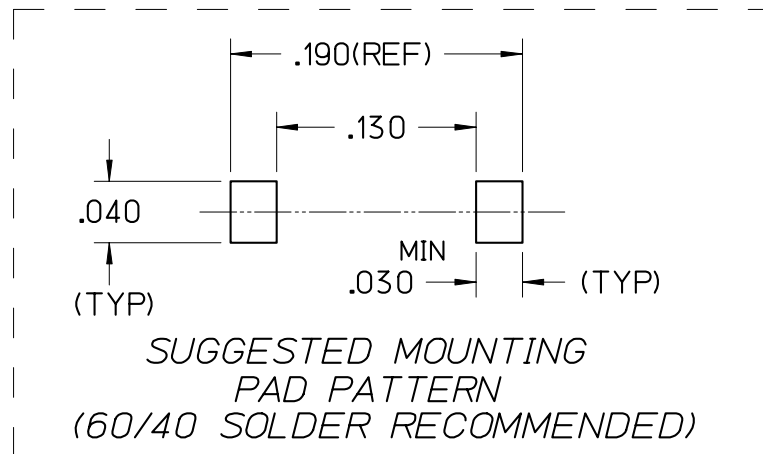
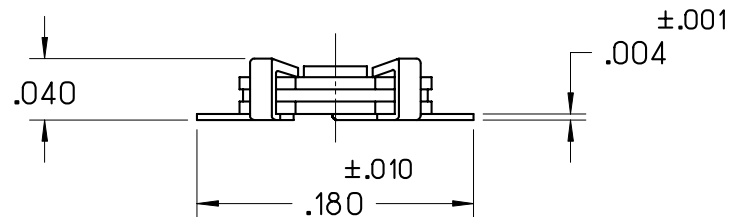


9341 DASH NO. -1 B

CERAMIC TRIMMER CAPACITOR

SPECIFICATIONS		FILE: THINOUT
CAPACITY RANGE	(SEE TABLE)	
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)	
Q @ 100 MHz	(SEE TABLE)	
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS	
TEMPERATURE RANGE	-55°C TO +125°C	
TORQUE	0.05 TO 1.0 OZ. IN.	
RoHS COMPLIANT		

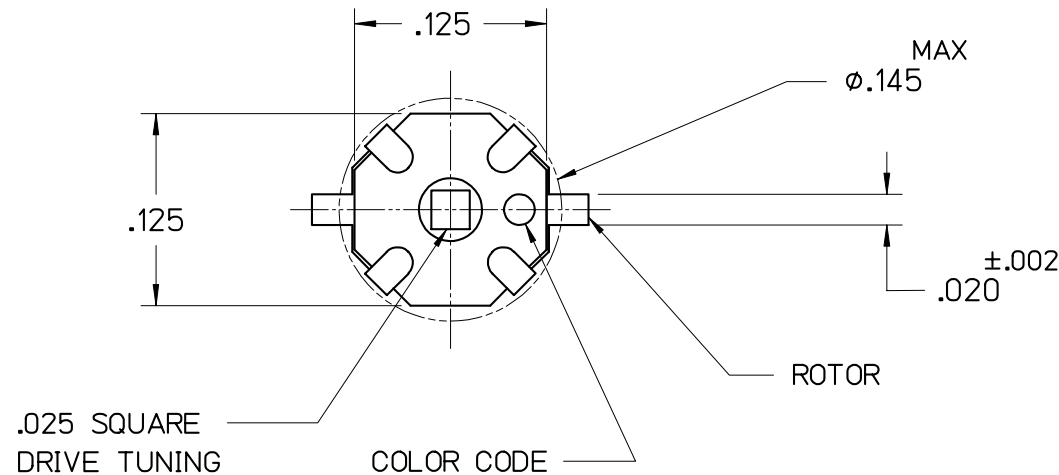

JMC P/N	COLOR CODE	CAPACITANCE pF		Q @ 100MHZ
		MIN	MAX	
9341-1-1	BLACK	1.0	3.0	>1000
9341-2-1		1.5	5.0	
9341-3-1	BLUE	1.5	10	
9341-4-1		2.5	10	
9341-5-1	YELLOW	5.0	20	>300

B	2/7/12	RJV	RJV	2/7/12	MAI	001048
A	7/14/11	RJV	-	-	-	000953
LEVEL	DATE	DRN.	CHK.	APP.	ECN	
REVISIONS						
DRN.	RJV	CHK.	RJV	APP.	MAI	SCALE 8" = 1"
DATE	7/14/11	DATE	7/14/11	DATE	7/14/11	.XX ± .015 .XXX ± .005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION