

MI DRG. NO.

9342-#-1B




REV.

9342 DASH NO. **-1 B****CERAMIC TRIMMER CAPACITOR**

SPECIFICATIONS

FILE: THINOUT

CAPACITY RANGE	(SEE TABLE)
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)
Q @ 100 MHz	(SEE TABLE)
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS
TEMPERATURE RANGE	-55°C TO +125°C
TORQUE	0.05 TO 1.0 OZ. IN.

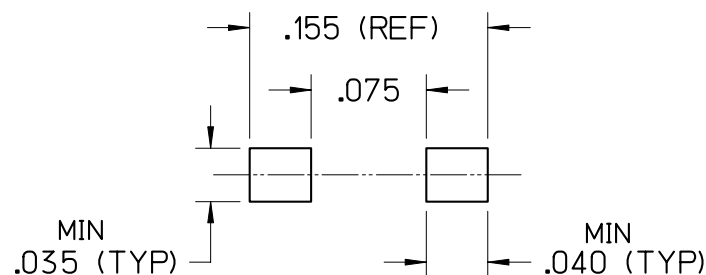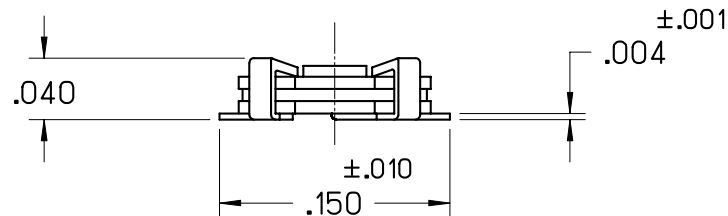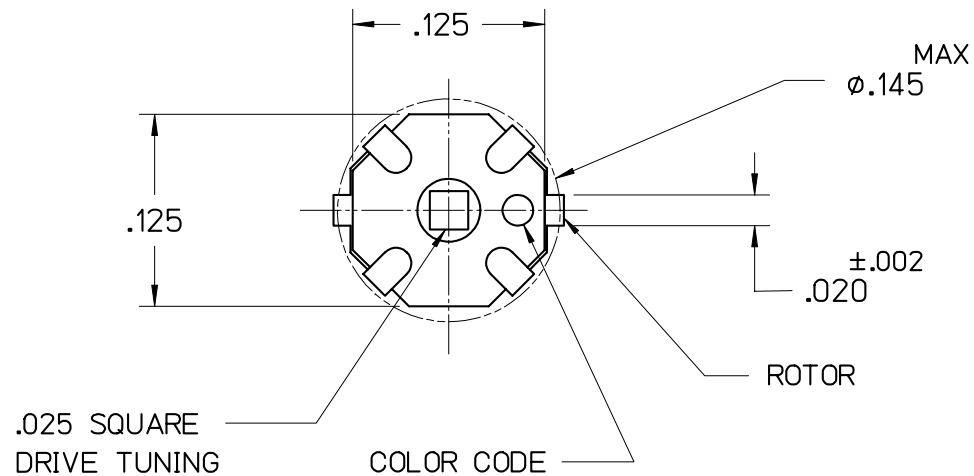

*SUGGESTED MOUNTING
PAD PATTERN
(60/40 SOLDER RECOMMENDED)*

JMC P/N	COLOR CODE	CAPACITANCE pF		Q @ 100MHZ
		MIN	MAX	
9342-11-1	BLACK	2.0	3.0	>1000
9342-12-1		2.5	5.0	
9342-13-1		3.0	5.0	
9342-14-1	BLUE	3.0	10	>300
9342-15-1		5.0	10	
9342-16-1	YELLOW	5.0	20	>300

B	7/13/11	RJV	RJV	7/13/11	MAI	000953
LEVEL	DATE	DRN.	CHK.	APP.	ECN	
REVISIONS						
DRN.	RJV	CHK.	RJV	APP.	MAI	SCALE 8" = 1"
DATE	6/24/11	DATE	6/24/11	DATE	6/24/11	.XX ± .015 .XXX ± .005



JOHANSON MANUFACTURING CORPORATION
ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL