



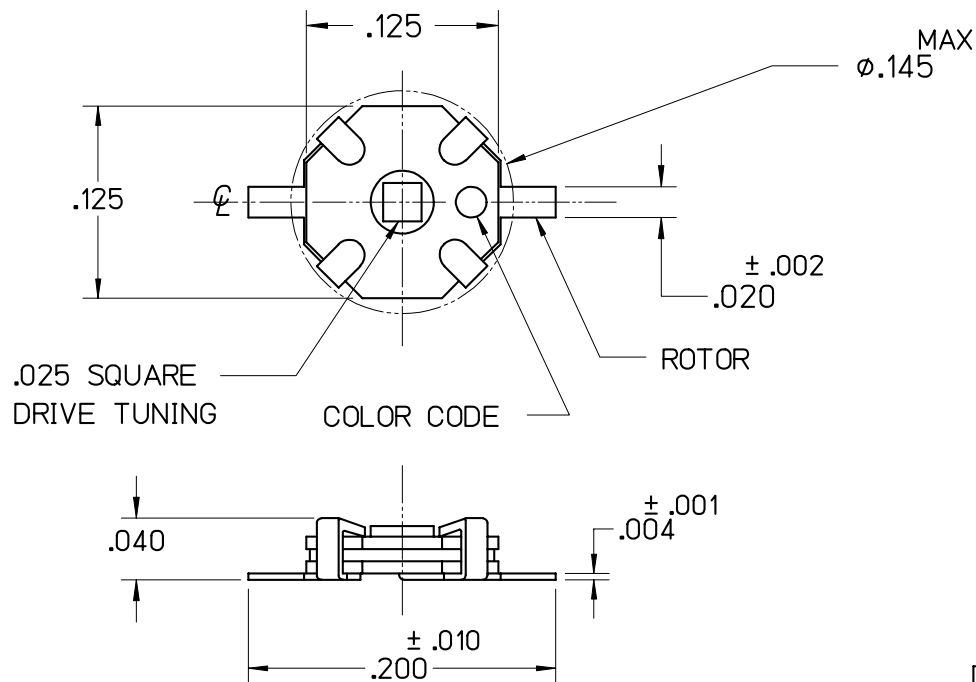

.025 SQUARE
DRIVE TUNING

COLOR CODE

ROTOR

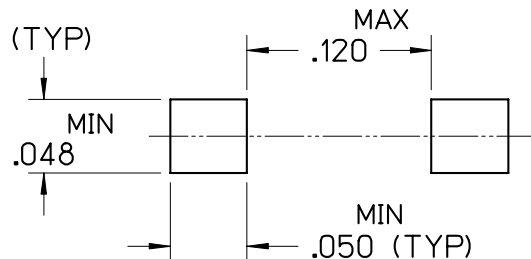

*SUGGESTED MOUNTING
PAD PATTERN
(60/40 SOLDER RECOMMENDED)*

MI DRG. NO.

9343-#-1C

REV.

9343 DASH NO. **-1** **C**

CERAMIC TRIMMER CAPACITOR

SPECIFICATIONS		FILE: THINOUT
CAPACITY RANGE	(SEE TABLE)	
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)	
Q @ 100 MHz	(SEE TABLE)	
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS	
TEMPERATURE RANGE	-55°C TO +125°C	
TORQUE	0.05 TO 1.0 OZ. IN.	

JMC P/N	COLOR CODE	CAPACITANCE pF		Q @ 100MHZ
		MIN	MAX	
9343-11-1	BLACK	1.0	3.0	>1000
9343-12-1		1.5	5.0	
9343-13-1		2.0	5.0	
9343-14-1	BLUE	1.5	10	>1000
9343-15-1		2.5	10	
9343-16-1		3.0	10	
9343-17-1	GREEN	4.5	20	>500

C	9/7/111	RJV	RJV 10/12/11 MAI		000982
B	6/22/11	RJV	RJV 6/23/11 MAI		000948
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	RJV	CHK.	RJV	APP.	MAI	SCALE
DATE	6/20/11	DATE	6/20/11	DATE	6/21/11	.XX ± .015 .XXX ± .005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL