


E-Series 2-Way 0° Power Divider 5 - 1000 MHz




Features

- 2 Way
- 0 Degree
- Surface Mount
- 75 Ohm



SM-139 Package

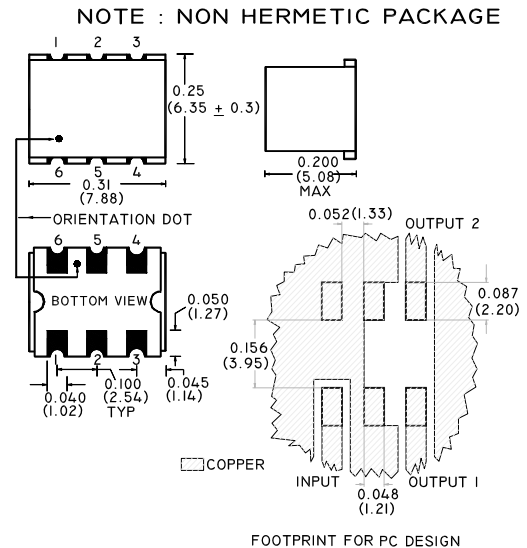

Description

M/A-COM's ELPD-20-1 is a 2 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume CATV applications.

Electrical Specifications @25°C

Parameter	Units	Typical	Minimum	Maximum
Frequency Range	5 - 1000 MHz	—	—	—
Insertion Loss	5 - 50 MHz	0.2	—	0.5
	50 - 500 MHz	0.5	—	0.8
	500 - 1000 MHz	1.0	—	1.3
Isolation	5 - 50 MHz	26	22	—
	50 - 500 MHz	29	22	—
	500 - 1000 MHz	22	18	—
Amplitude Unbalance	5 - 50 MHz	—	—	0.1
	50 - 500 MHz	—	—	0.3
	500 - 1000 MHz	—	—	0.5
Phase Unbalance	5 - 50 MHz	—	—	1.0°
	50 - 500 MHz	—	—	3.0°
	500 - 1000 MHz	—	—	4.0°
Output Return Loss	5 - 750 MHz	—	18	—
	750 - 1000 MHz	—	15	—
Input Return Loss	5 - 1000 MHz	—	18	—
	750 - 1000 MHz	—	12	—

Please Note that the photograph above indicates package shape only, unit may be wired differently.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400 V5.
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make

Absolute Maximum Ratings


Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 Sec)	260°C
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C

Functional Configuration


Function	Pin No.
Not Connected	2,5
External 75 Ohms	—
Ground	6
Case Ground	—
Input	1
Port 1	3
Port 2	4

Typical Performance @ +25°C


Insertion Loss

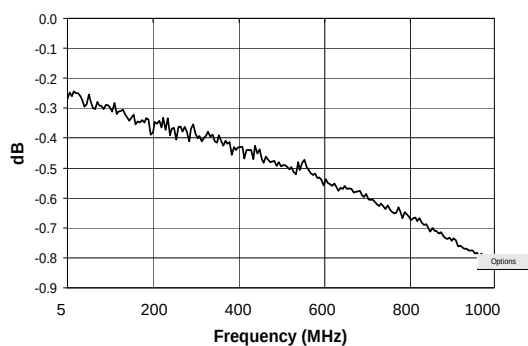


Isolation

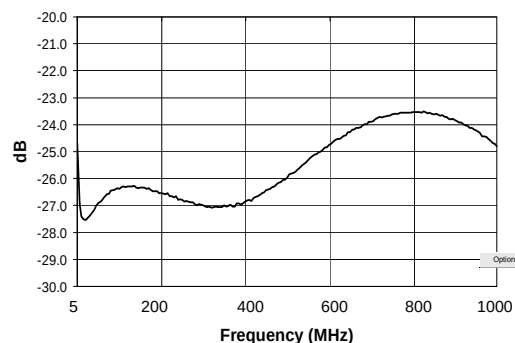


Amplitude Unbalance

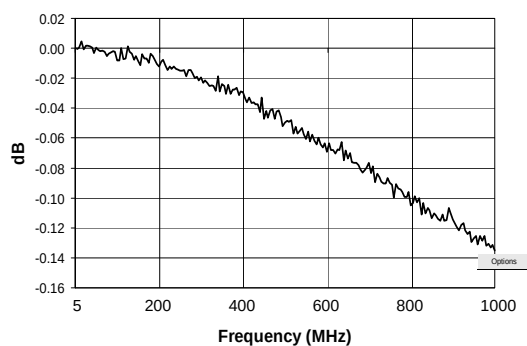


Phase Unbalance

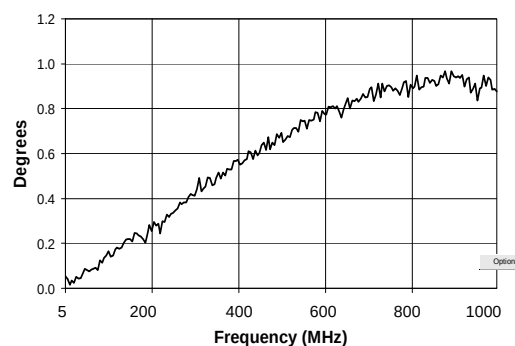

Output Return Loss

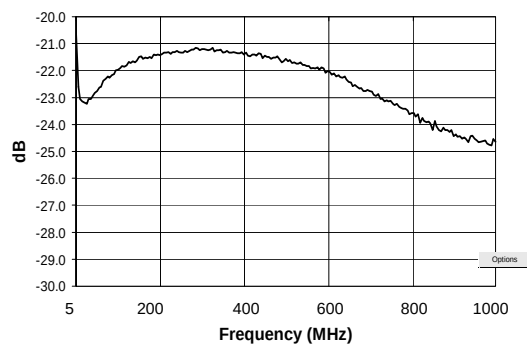

Input Return Loss

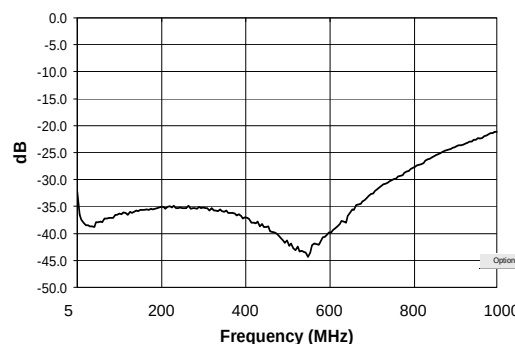

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 V5.
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make