


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1505	A	INITIAL RELEASE	DG	8-08
3009	B	SEE DAR	DG	3-11

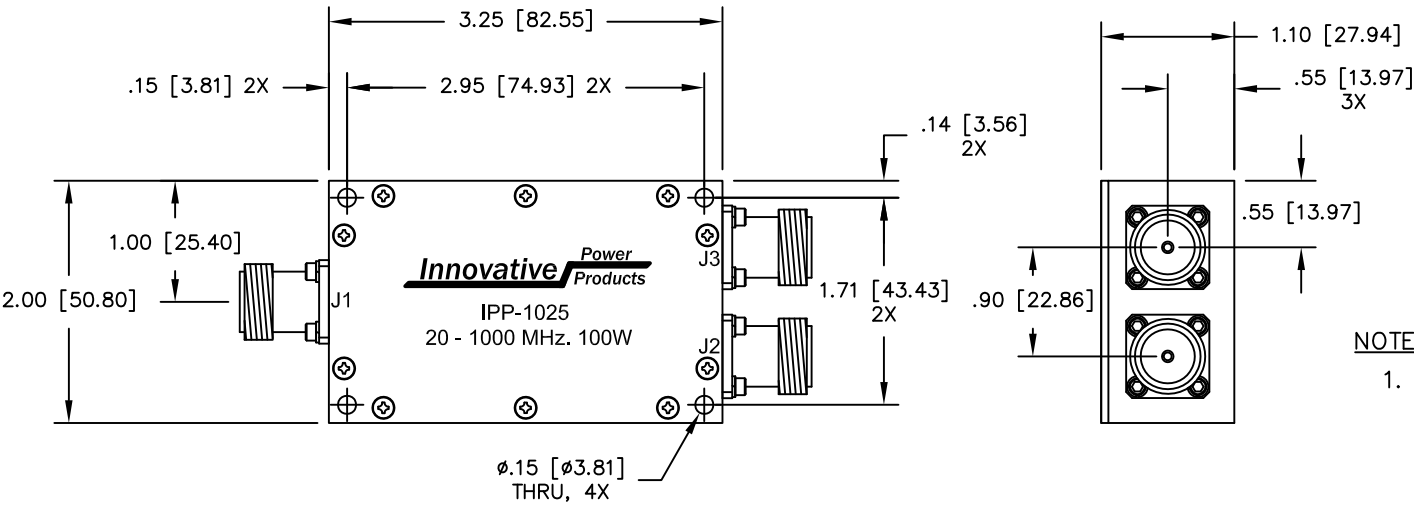

NOTES:
1. CONNECTOR TYPE J1, 2, 3: TYPE 'N' FEMALE

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 – 1000 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.3 dB
POWER:	100 WATT
ISOLATION:	>15 dB 20–1000 MHz

MATERIAL	AL. ALLOY 6061-T651	DWN	DG	DATE	7-08	<i>Innovative</i> <i>Power</i> Products		
		ENG	TJD	DATE	7-08			
FINISH	CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF	TP	DATE	7-08	TITLE OUTLINE 2 - WAY 20 - 1000 MHz 100 WATT		
		CAGE CODE: 437R2						
TOLERANCE	.XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET	OF	SCALE		SIZE	P/N	REV.
		1	1	1:1		B	IPP-1025	B