


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3219	A	INITIAL RELEASE	DG	8-11
5185	B	SEE DAR	DG	10-14

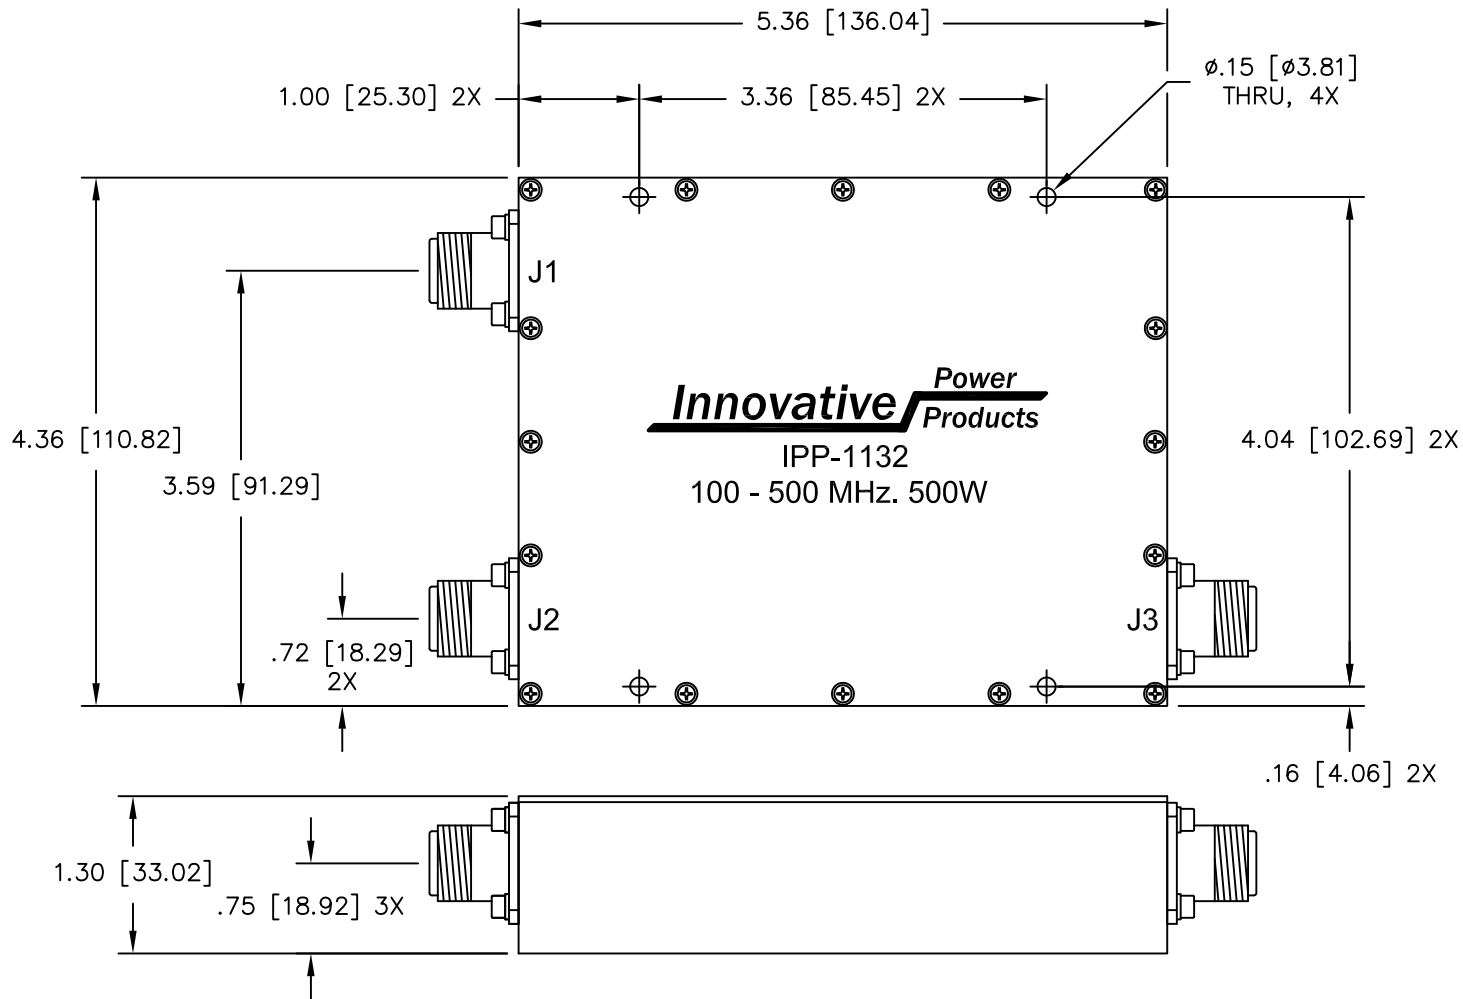

NOTES:

- CONNECTORS: J1-3: TYPE "N" FEMALE.
- SUM PORT: J1
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	100 - 500 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.40:1
PHASE BALANCE:	±5°
POWER:	500 WATT
AMPLITUDE BALANCE:	±0.2 dB
ISOLATION:	>8 dB
TEMPERATURE:	-40°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN	DG	DATE	10-10	Innovative Power Products		
	ENG	TJD	DATE	10-10			
	FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290, .0003 MIN. SEMI-BRIGHT		MANUF	DATE	TITLE OUTLINE 2 - WAY 100 - 500 MHz 500 WATT		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2			SIZE B		P/N IPP-1132	
	SHEET 1	OF 1	SCALE 1:1			REV. B	