


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3016	A	INITIAL RELEASE	DG	3-11

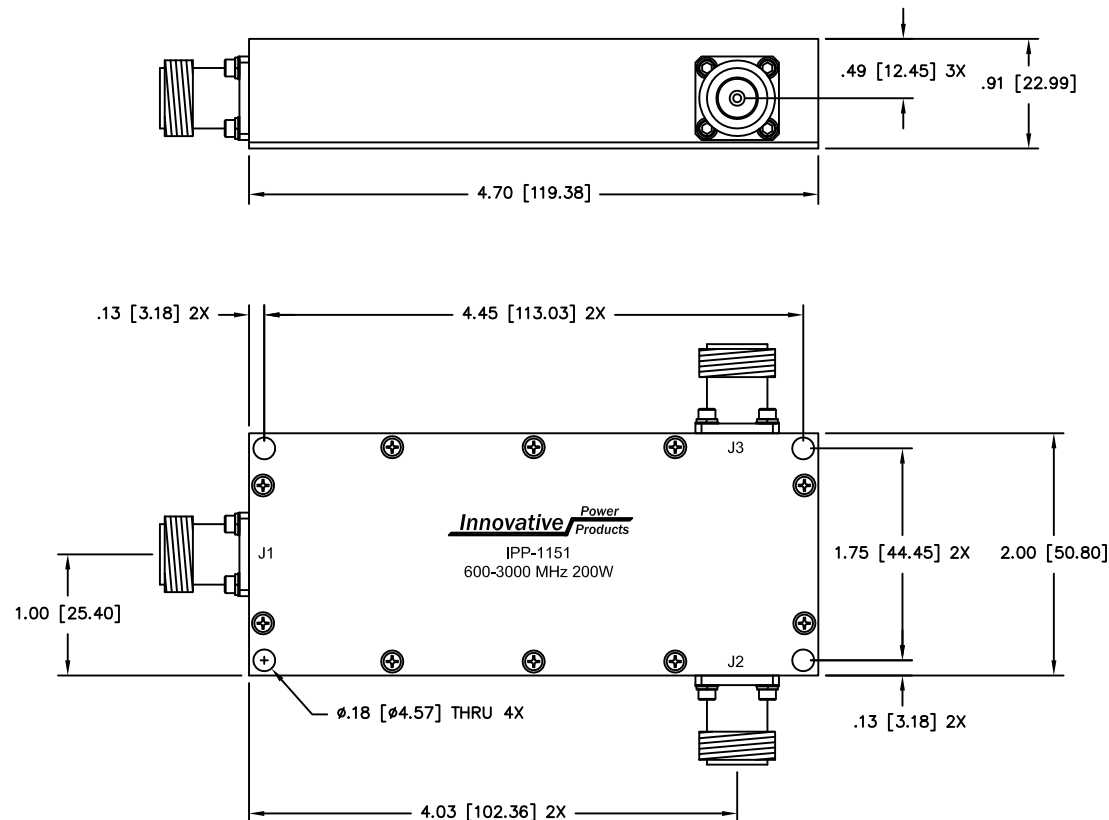

NOTES:

1. CONNECTORS: J1-J3 'N' FEMALE
2. J1: SUM PORT

ELECTRICAL SPECIFICATIONS

FREQUENCY:	600 - 3000 MHz.
INSERTION LOSS:	< 0.5 dB
AMPLITUDE BALANCE:	<0.25dB
VSWR:	< 1.35:1
PHASE BALANCE:	±5°
POWER:	200 WATT
ISOLATION:	> 12dB
TEMPERATURE:	-55°C TO +85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 3-30-11	<i>Innovative</i> <i>Power</i> <i>Products</i>		
	ENG DG	DATE 3-11			
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290, GRADE D .0008 THICK, SEMI-BRIGHT	MANUF	DATE	TITLE OUTLINE 2 - WAY 600 - 3000 MHz 200 WATT		
	CAGE CODE: 437R2				
TOLERANCE .xxx ±.005 [.127] IN [MM] .xx ±.02 [.50] ANG. ±1/2°	SHEET 1 OF 1	SCALE 1:1	SIZE B	P/N IPP-1151	REV. A