


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3362	A	INITIAL RELEASE	TJD	10-11

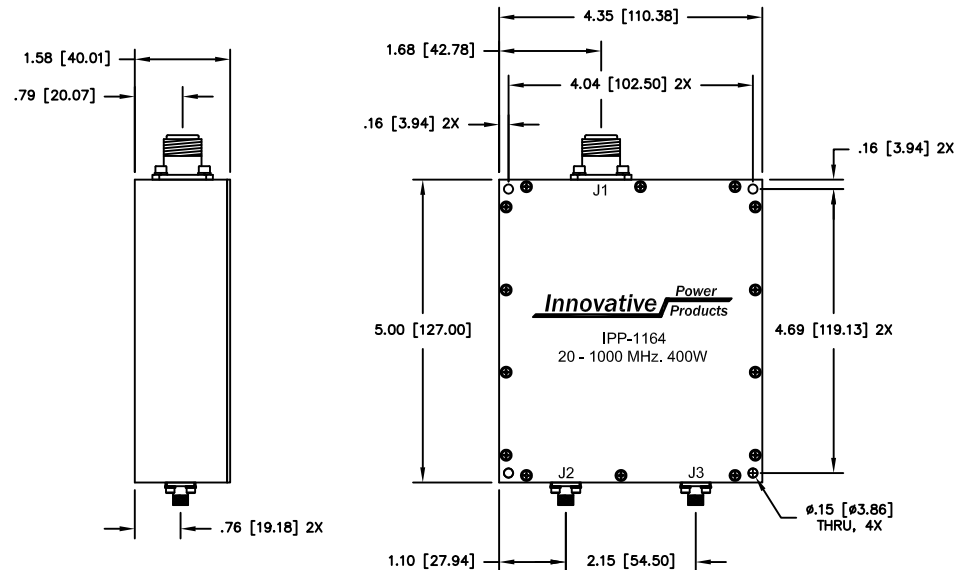

NOTES:

- CONNECTORS – J1: TYPE 'N' (F)
J2, J3: TYPE 'SMA' (F)
- J1: SUM PORT

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 – 1000 MHz.
INSERTION LOSS:	< 0.80 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.2 dB
POWER:	500 WATT
ISOLATION:	>10 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN	DG	DATE	9-11	Innovative Power Products	
	ENG	TJD	DATE	9-11		
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF		DATE		TITLE OUTLINE 2 - WAY 20 - 1000 MHz 400 WATT	
	CAGE CODE: 437R2					
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET	OF	SCALE		SIZE	P/N
	1	1	.5:1		B	IPP-1164
						REV. A