



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

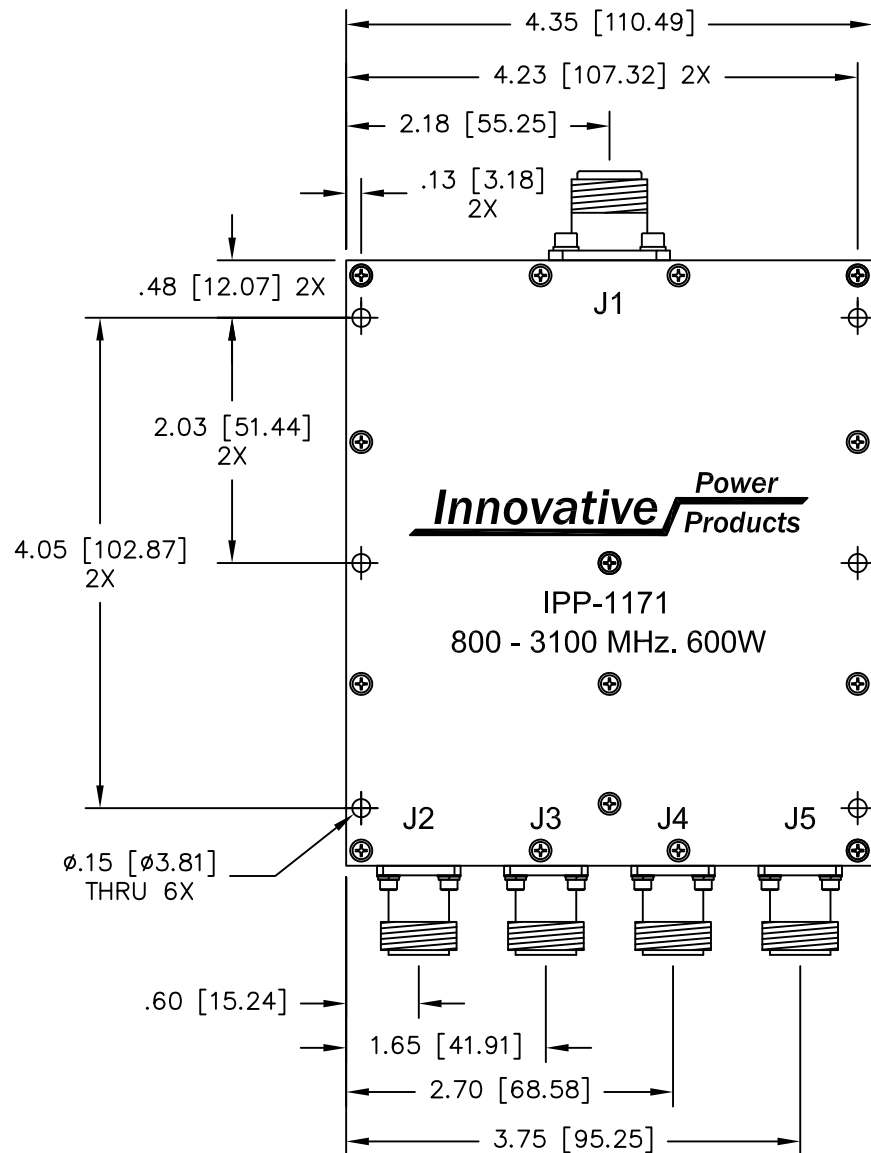

DAR	REV	DESCRIPTION	APPVD	DATE
3590	A	INITIAL RELEASE	DG	4-12
4758	B	SEE DAR	DG	1-14
4947	C	SEE DAR	DG	5-14

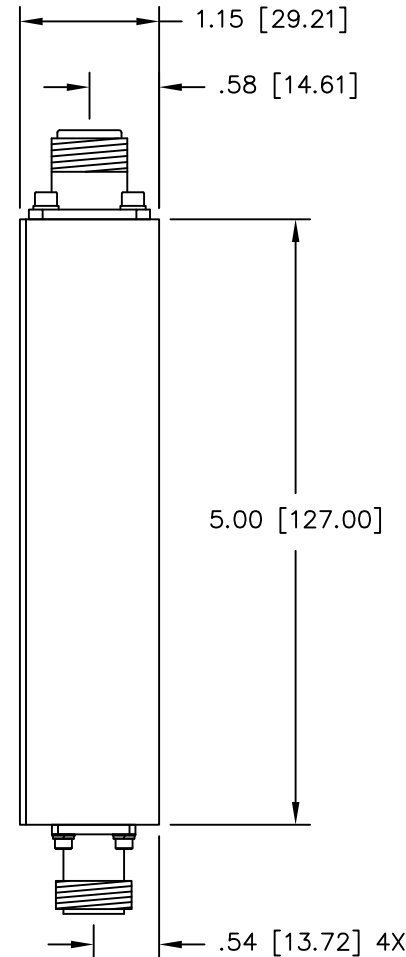

- CONNECTORS: J1-5: TYPE "N" FEMALE.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	800 - 3100 MHz.
INSERTION LOSS:	< 0.65 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
POWER:	600 WATT
ISOLATION:	N/A
AMPLITUDE BALANCE:	±0.3 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN	DG	DATE	10-11	Innovative Power Products		
FINISH	ELECTRODEPOSITED NICKEL PER QQ-N-290. .0003 MIN.SEMI-BRIGHT	ENG	TJD	DATE	10-11			
TOLERANCE	.XX ±.02 .XXX ±.010 ANG. ±1/2°	MANUF		DATE		TITLE		
		CAGE CODE: 437R2				OUTLINE		
		SHEET	OF	SCALE		SIZE	P/N	REV.
		1	1	1:1		B	IPP-1171	C