


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3475	A	INITIAL RELEASE	DG	2-12
3893	B	SEE DAR	TJD	8-12

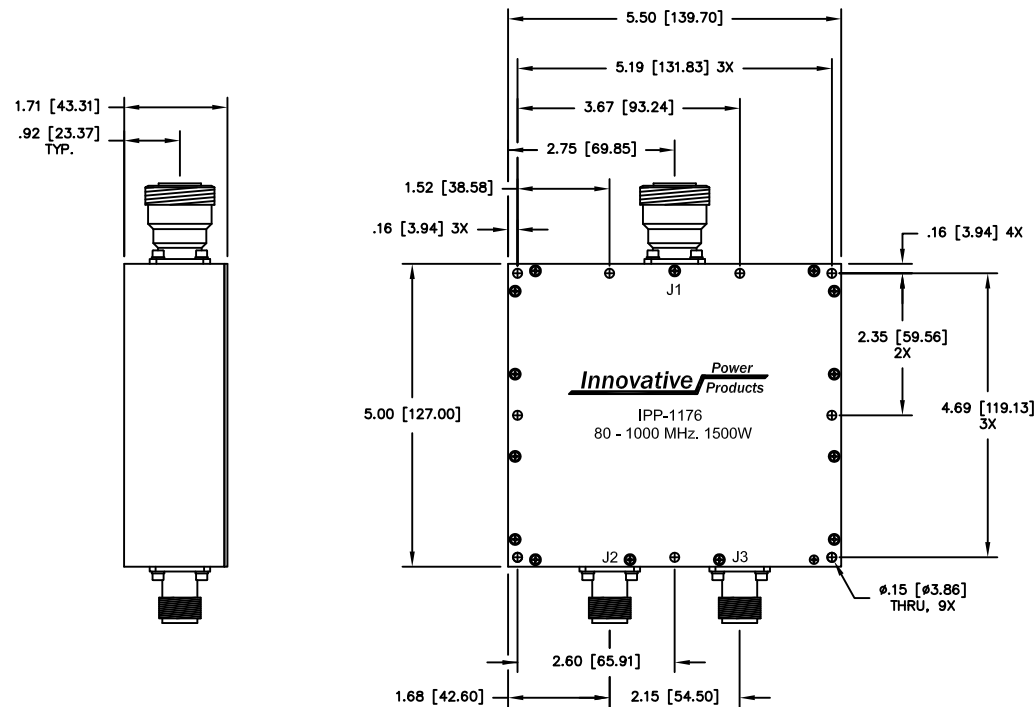

NOTES:

1. CONNECTOR TYPE

J1: TYPE '7/16' FEMALE.

J2 - J3: TYPE 'SC' FEMALE

ELECTRICAL SPECIFICATIONS

FREQUENCY: 80 - 1000 MHz.

INSERTION LOSS: < 0.40 dB

VSWR: < 1.30:1

PHASE BALANCE: $\pm 5^\circ$

AMPLITUDE BALANCE: ± 0.25 dB

POWER: 1500 WATT

ISOLATION: NON-ISOLATED

TEMPERATURE: -55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN	DG	DATE	11-11	<i>Innovative</i> <i>Power</i> <i>Products</i>		
	ENG	TJD	DATE	11-11			
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290, .0003 MIN. SEMI-BRIGHT	MANUF		DATE		TITLE OUTLINE 2 - WAY 80 - 1000 MHz 1500 WATT		
	CAGE CODE: 437R2						
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET	OF	SCALE		SIZE B	P/N IPP-1176	REV. B
	1	1	.5:1				