
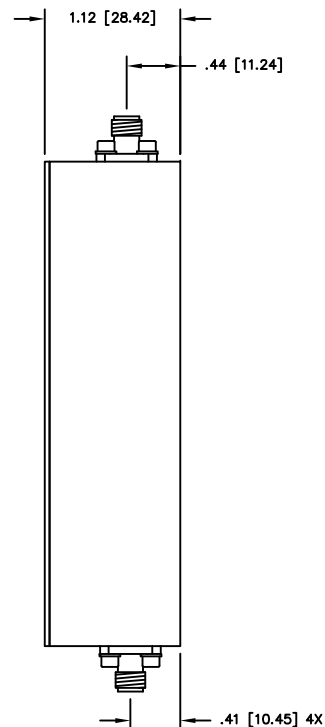


DAR	REV	DESCRIPTION	APPVD	DATE
3890	A	INITIAL RELEASE	.	.

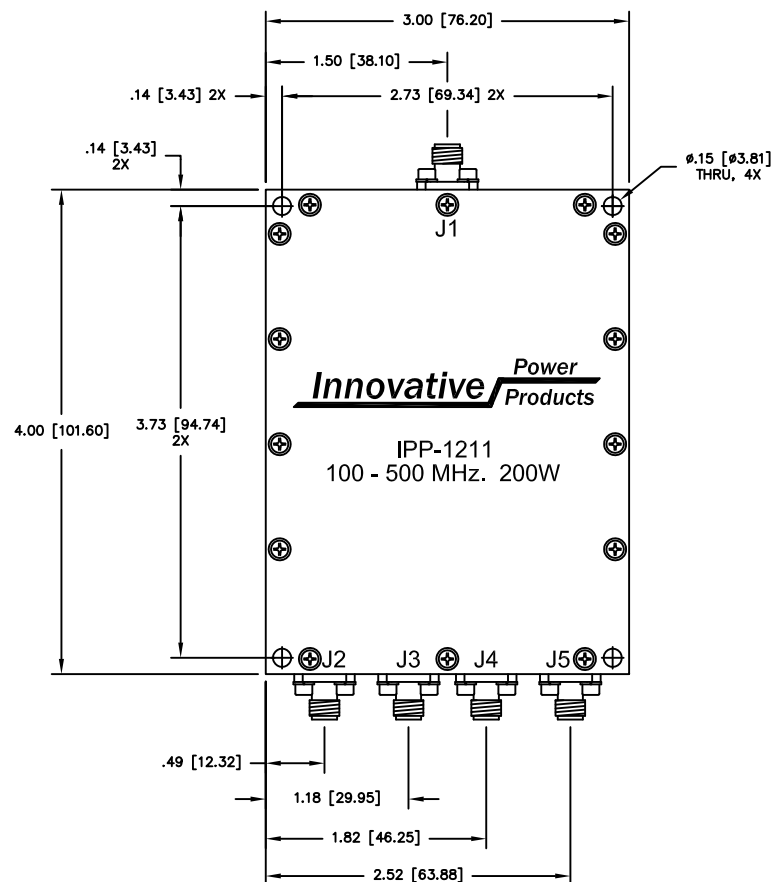

1. CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.
2. RoHS COMPLIANT.

FREQUENCY:	100 – 500 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.25:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.20 dB
POWER:	200 WATT
ISOLATION:	>15 dB
TEMPERATURE:	–55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN S.Cornell	DATE 10-12-12	Innovative Power Products			
	FINISH	CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	ENG .				
TOLERANCE	.XX ±.02 .XXX ±.010 ANG. ±1/2°	MANUF	DATE	TITLE			
		CAGE CODE: 437R2		OUTLINE			
				4 - WAY 100 - 500 MHz 200 WATT			
		SHEET 1 OF 1	SCALE 1:1	SIZE B	P/N	IPP-1211	REV. A