



E-Series RF 1:4 Flux Coupled Step-up Transformer 2.0 - 800 MHz

Features


- Surface Mount
- 1:4 Impedance Ratio
- CT on Secondary
- Available on Tape & Reel




Description

M/A-COM's ETC4-1-2 is a 1:4 RF flux coupled step-up transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

SM-22 Package

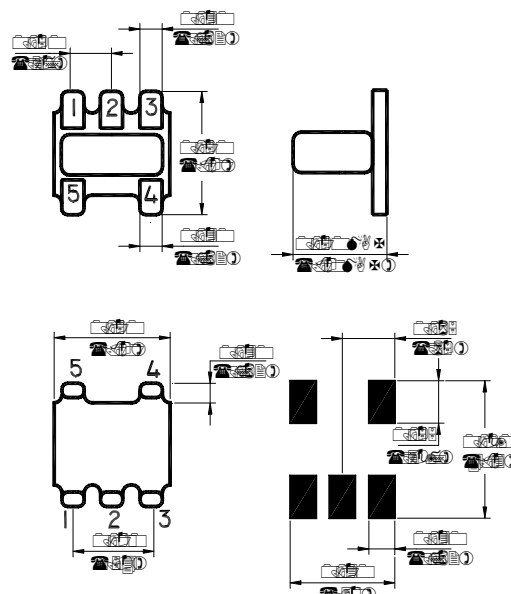

Schematic

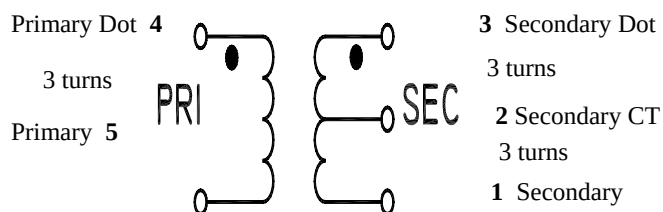

Electrical Specifications @25°C

Parameter	Units	Nominal	Maximum	Mean (x)	Sigma (σ)
Frequency Range 2.0 - 800	MHz	—	—	—	—
Insertion Loss ($f_L - f_U$)					
10 - 100 MHz	dB	—	1.0	—	—
5.0 - 600 MHz	dB	—	2.0	1.21	0.032
Amplitude Unbalance					
10 - 100 MHz	dB	—	0.25	—	—
2.0 - 800 MHz	dB	—	1.0	—	—
Phase Unbalance					
10 - 500 MHz	Degrees	—	2.0	—	—
2.0 - 800 MHz	Degrees	—	10	—	—

Note: Mean and Sigma calculated from average loss at @ 105 MHz.

Please Note that the photograph above indicates typical package only, not actual unit.

V2.00 S 0258 M

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

Functional Configuration


Function	Pin No.
Secondary	1
Secondary CT	2
Secondary Dot	3
Primary Dot	4
Primary	5

Typical Performance Over Extended Bandwidth (30kHz - 1.0GHz)


Insertion Loss

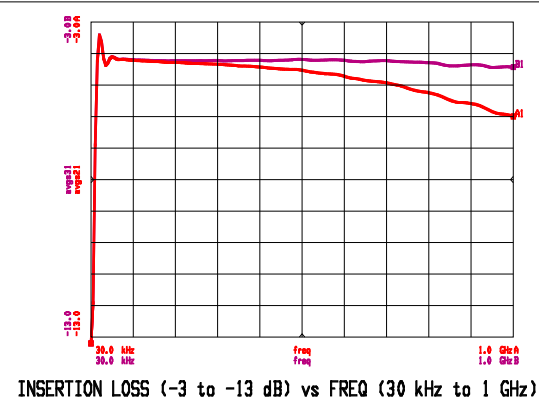


Phase Unbalance

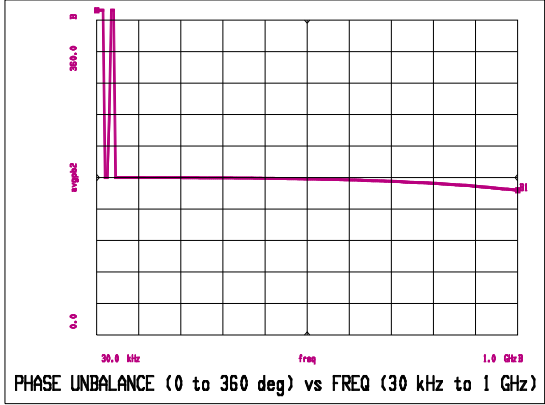

Amplitude Unbalance

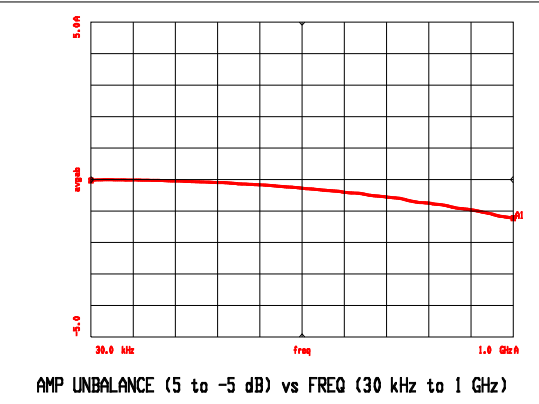

Input Impedance

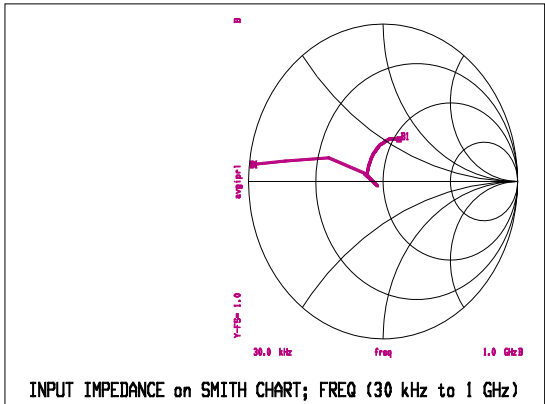

Note: All measurements performed on Hewlett Packard 8753D Network Analyzer (201 sample points, linear scale) in a 50 ohm coplanar waveguide environment. Tables created using MDS software.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make