

MABA-008965-CF1160

1:1 Flux Coupled Balun Transformer
5 - 120 MHz

M/A-COM Products
Part Status: Released Rev. V2

Features


- Surface Mount
- 1:1 Impedance
- 75 Ohm
- RoHS Compliant

Description


M/A-COM's MABA-008965-CF1160 is a 1:1 RF flux coupled Transformer in a low cost surface mount package. Ideally suited for high volume CATV application.



Schematic

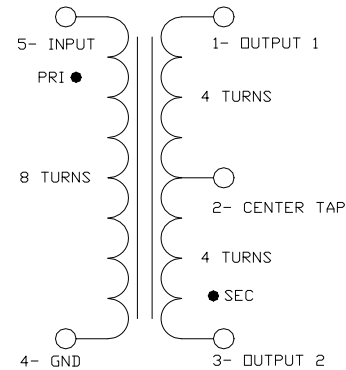

Case Style SM-22A

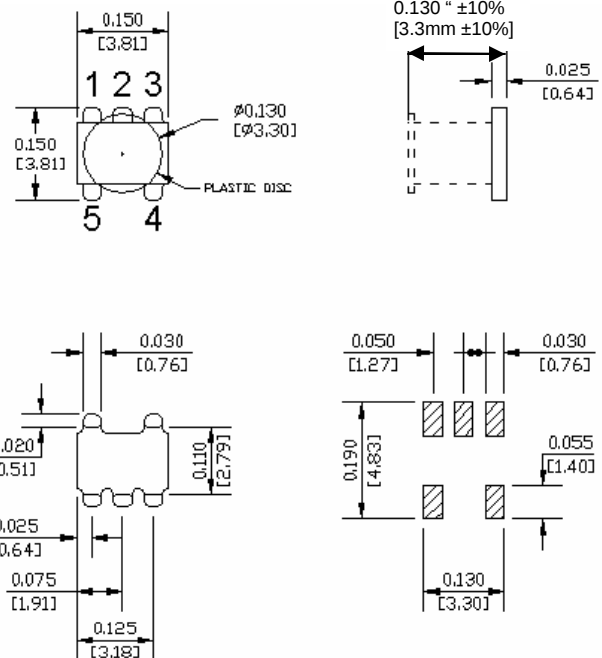

Dimensions are inches [millimeters] ± 0.015 [0.38] unless otherwise specified.

Pin Configuration

Function	Pin Number
Secondary (output)	1
Secondary Centre Tap	2
Secondary Dot (output)	3
Primary (ground)	4
Primary Dot (Input)	5

Ordering Information

Parameter	Absolute Maximum
MABA-008965-CF1160	2000
MABA-008965-CF11TB	Customer Test Board


1:1 Flux Coupled Balun Transformer
5 - 120 MHz
M/A-COM Products
 Part Status: Released Rev. V2

Electrical Specifications: $T_A = 25^\circ\text{C}$, 0dBm, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Range	5 – 120 MHz				
Insertion Loss 1 (Pin 5 to Pin 1)	5 – 80 MHz	dB	–	0.1	0.4
	80 – 120 MHz	dB	–	0.3	0.5
Insertion Loss 2 (Pin 5 to Pin 3)	5 – 80 MHz	dB	–	0.2	0.4
	80 – 120 MHz	dB	–	0.4	0.6
Amplitude Un-Balance	5 – 80 MHz	dB	–	± 0.06	± 0.2
	80 – 120 MHz	dB	–	± 0.18	± 0.3
Phase Un-Balance	5 – 80 MHz	$^\circ$	–	± 0.05	± 1.5
	80 – 120 MHz	$^\circ$	–	± 0.10	± 2.0
Input Return Loss (Pin 5)	5 – 80 MHz	dB	19	25	–
	80 – 120 MHz	dB	15	19	–

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250mW
DC Current	30mA
Operating Temperature	-40°C to $+85^\circ\text{C}$
Storage Temperature	-40°C to $+85^\circ\text{C}$

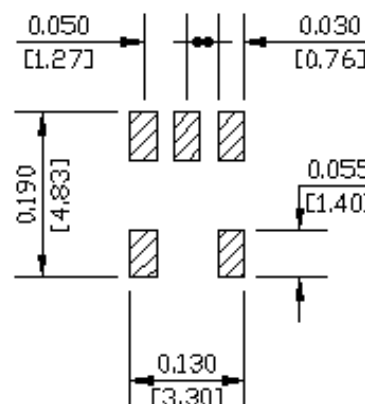
Recommended PCB Configuration


1:1 Flux Coupled Balun Transformer 5 - 120 MHz


M/A-COM Products
Part Status: Released Rev. V2

Typical Performance: $T_A = 25^\circ\text{C}$, 0dBm, $Z_0 = 75\Omega$


Insertion Loss 1 (Pin5 - Pin1)

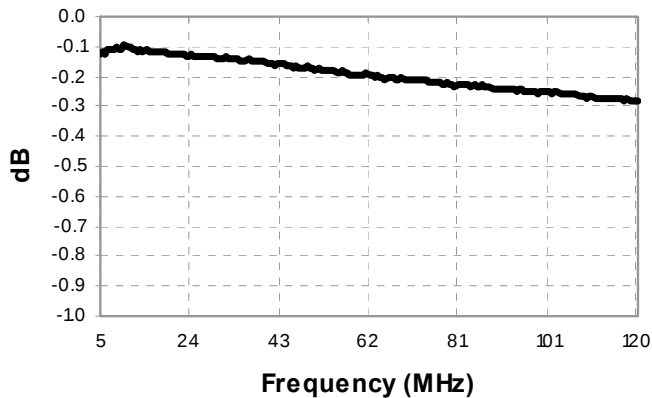


Insertion Loss 2 (Pin5 - Pin3)

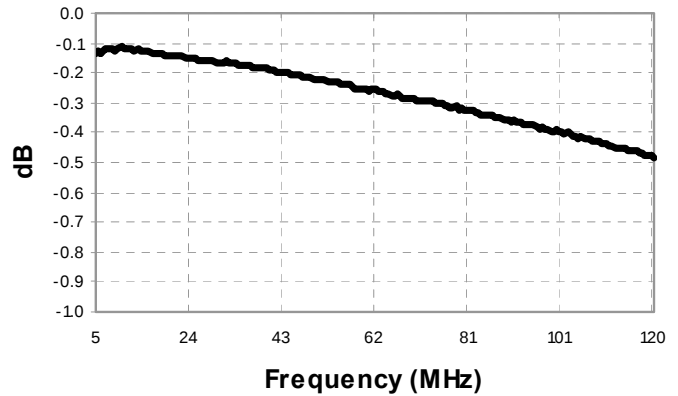

Amplitude Balance

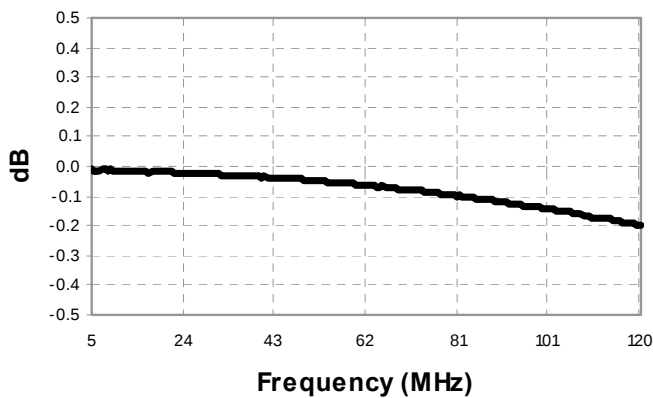

Phase Balance

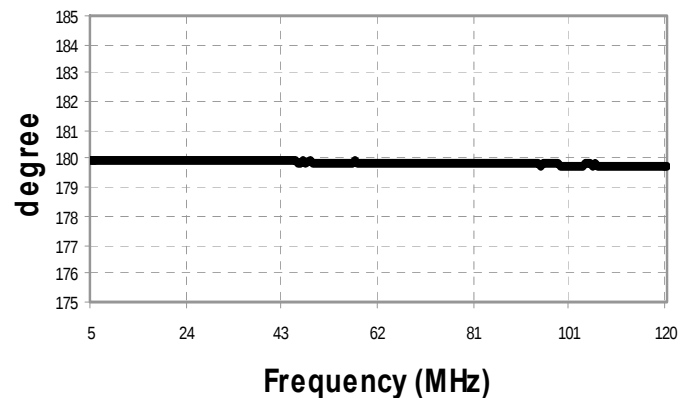

Return Loss: Input

