


DAR	REV	DESCRIPTION	APPVD	DATE
3441	A	INITIAL RELEASE	TJD	12-11

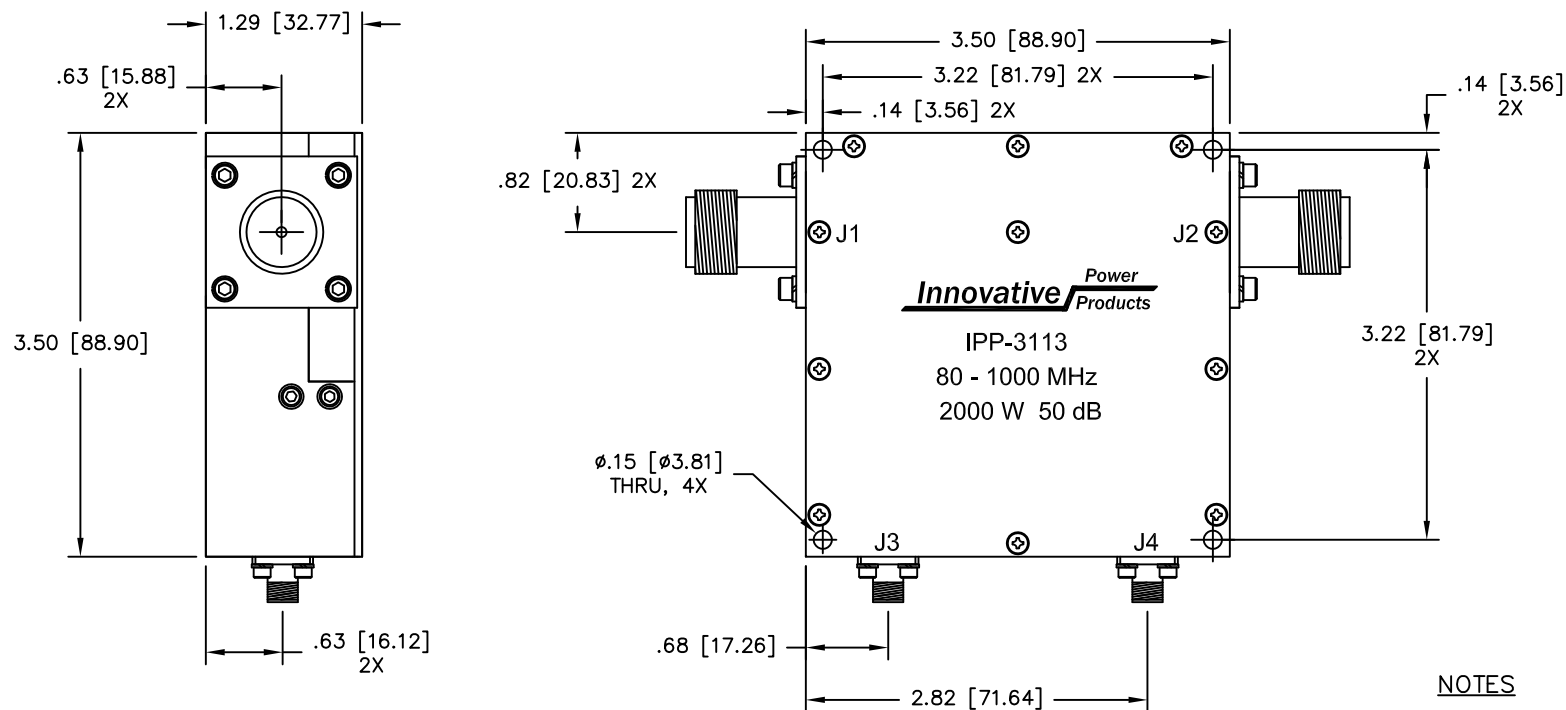

J1: INPUT
J2: OUTPUT
J3: -50dB (FWD. COUPLED)
J4: -50dB (REFL. COUPLED)

1. CONNECTORS J1 & 2:
TYPE SC-F
CONNECTORS J3 & 4:
TYPE SMA-F
2. RoHS COMPLIANT.

MATERIAL AL. ALLOY 6061-T651		DWN	DG	DATE	1-10			
FINISH CHEM FILM CLEAR, PER MIL-DTL-6541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)		ENG	AD	DATE	1-10			
TOLERANCE .XXX ±.005 IN [MM] .XX ±.02 ANG. ±1/2°		MANUF		DATE		TITLE OUTLINE, DUAL DIRECTIONAL COUPLER, 80-1000 MHz, 50dB, 2000W		
		CAGE CODE: 437R2						
		SHEET	OF	SCALE		SIZE	P/N	REV.
		1	1	1:1		B	IPP-3113	A