


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1307	A	RELEASE	TJD	6-07
1610	B	ADDED BOTTOM VIEW, REVISED THICKNESS	DG	11-08
3761	C	SEE DAR	DG	7-12
4559	D	SEE DAR	DG	9-13

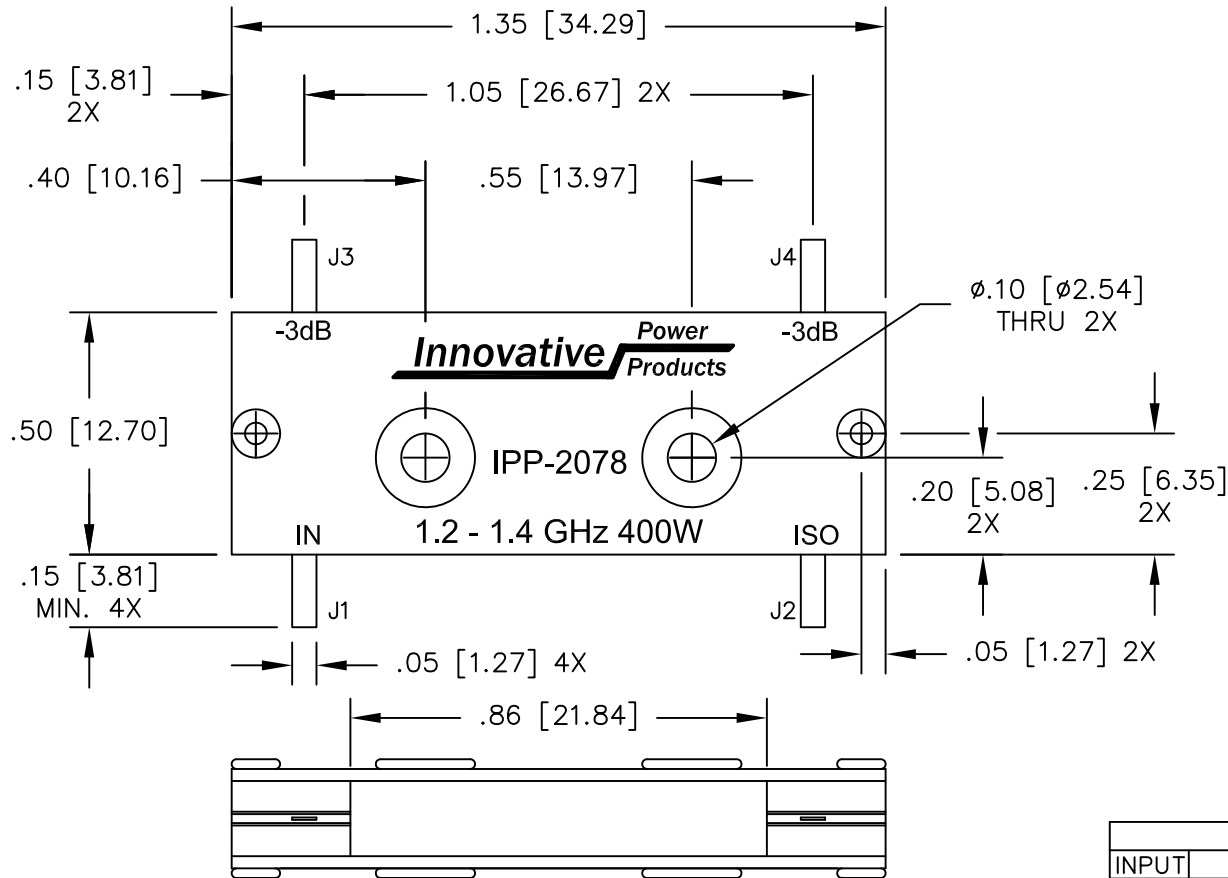

ELECTRICAL SPECIFICATIONS

NOTES:

- LEAD MATERIAL: 99.99% PURE SILVER .005 [.127] THICK.
- SEE 90° APPLICATION NOTE FOR FURTHER INFORMATION.
- RoHS COMPLIANT.
- DATA AND SPECIFICATIONS APPLY WHEN PART IS MOUNTED IN IPP TEST FIXTURE TF-1007. TEST FIXTURE CONFIGURATION/FOOTPRINT AVAILABLE ON REQUEST.

FREQUENCY:	1.2 - 1.4 GHz.
INSERTION LOSS:	< 0.20 dB
VSWR:	< 1.20:1
ISOLATION:	> 20 dB
AMPLITUDE BALANCE:	±0.30 dB
PHASE BALANCE:	±5°
POWER:	400 WATT
TEMPERATURE:	-55°C TO 85°C

PORT CONFIGURATION				
INPUT	J1	J2	J3	J4
J1	---	ISOLATION	-3dB<0 DEG	-3dB<-90 DEG
J2	ISOLATION	---	-3dB<-90 DEG	-3dB<0 DEG
J3	-3dB<0 DEG	-3dB<-90 DEG	---	ISOLATION
J4	-3dB<-90 DEG	-3dB<0 DEG	ISOLATION	---

MATERIAL AL. ALLOY, 6061-T6		DWN	DG	DATE	6-07	<i>Innovative</i> <i>Power</i> Products		
		ENG	TJD	DATE	6-07			
FINISH CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT		MANUF	TP	DATE	6-07	TITLE OUTLINE, COUP., 90°, 1.2 - 1.4 GHz. 400W		
		CAGE CODE: 437R2						
TOLERANCE IN [MM]		SHEET		OF	SCALE	SIZE	P/N	REV.
		1		1	4:1	B	IPP-2078	D