


POWER DERATING

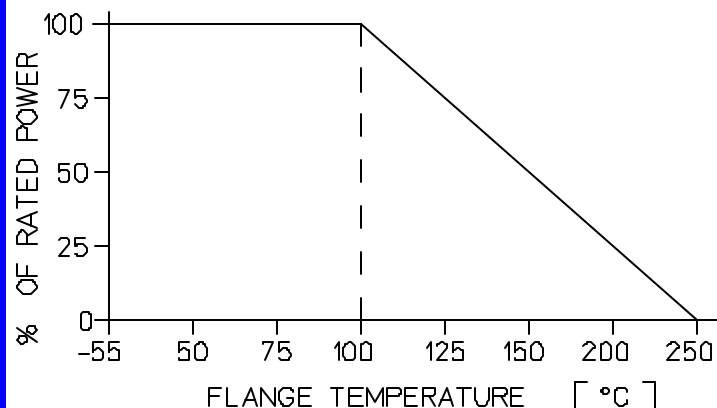

NOTES:

1. RoHS COMPLIANT
2. PROTECTIVE COAT.
3. Ni/Ag PLATED (PER QQ-N-290).
4. THICK FILM RESISTIVE ELEMENT

MI DRG. NO.

CT2335AB5C-04D

REV.

CT2335AB5C-04 D**CHIP TERMINATION, HIGH POWER ALN**



SPECIFICATIONS

FILE TERMOUT

POWER MAX (WATTS)	150 CW
RESISTANCE	50 OHMS (±5%)
FREQUENCY	VSWR
DC - 3000 MHz	1.1 : 1

DIMENSIONS IN BRACKETS IN [mm]

Ni/Ag PLATED
FULL BACKPRINT
(GROUND PLANE)

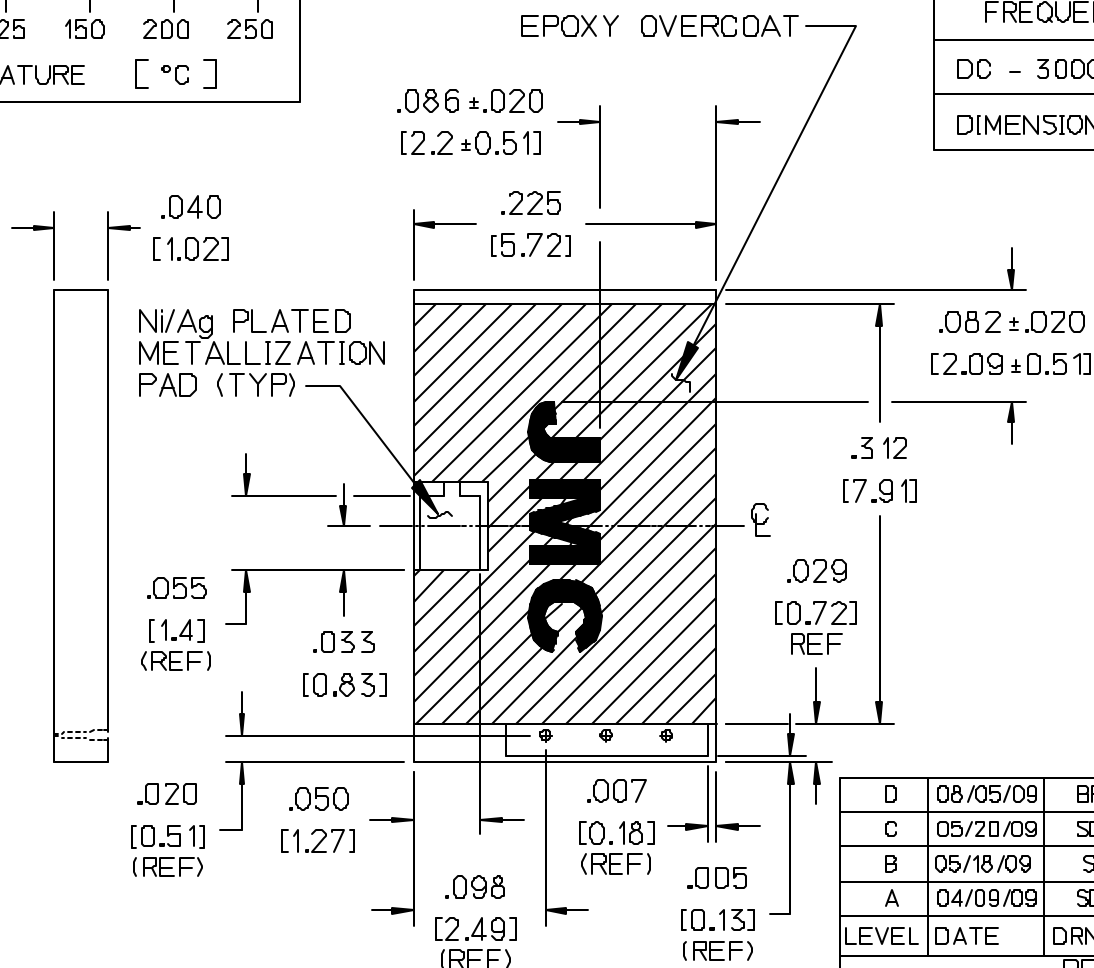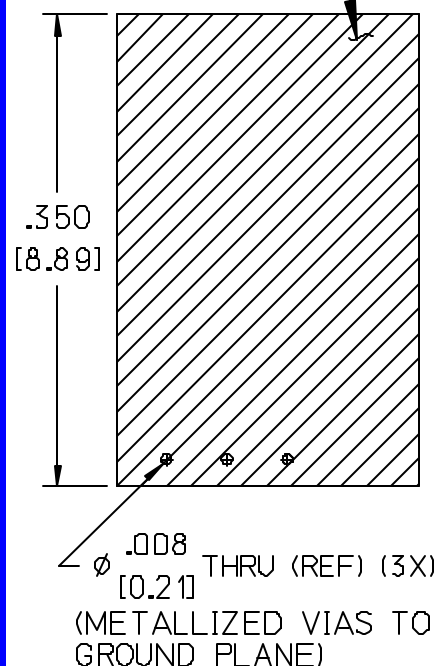

D	08/05/09	BFH	SDJ	MAI	000792
C	05/20/09	SDJ	SDJ	MAI	000771
B	05/18/09	SDJ	SDJ	MAI	000763
A	04/09/09	SDJ	-	-	000740
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
SDJ	SDJ	MAI	7' - 1'
DATE	DATE	DATE	.XX±.015 [3.81]
04/09/09	04/09/09	04/09/09	.XXX±.005 [127]

**JOHANSON MANUFACTURING CORPORATION**

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973) 534-2676 FAX (973) 534-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL