


POWER DERATING

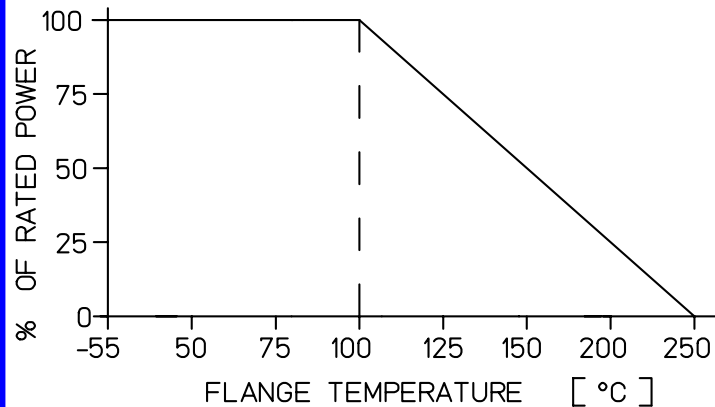

NOTES:

- 1) RoHS COMPLIANT
- 2) EPOXY PROTECTIVE COAT
- 3) Ag OVERCOAT PLATED
- 4) THICK FILM RESISTIVE ELEMENT

MI DRG. NO.

CT3725AB5C-33A


REV.

CT3725AB5C-33**A****CHIP TERMINATION, HIGH POWER ALN**

SPECIFICATIONS

FILE: TERMOUT

POWER MAX (WATTS):	150 CW
RESISTANCE	50 OHMS (±5%)
FREQUENCY	VSWR
DC-2000 MHz	1.1:1
2000-3500 MHz	1.25:1
DIMENSIONS IN BRACKETS ARE [mm]	

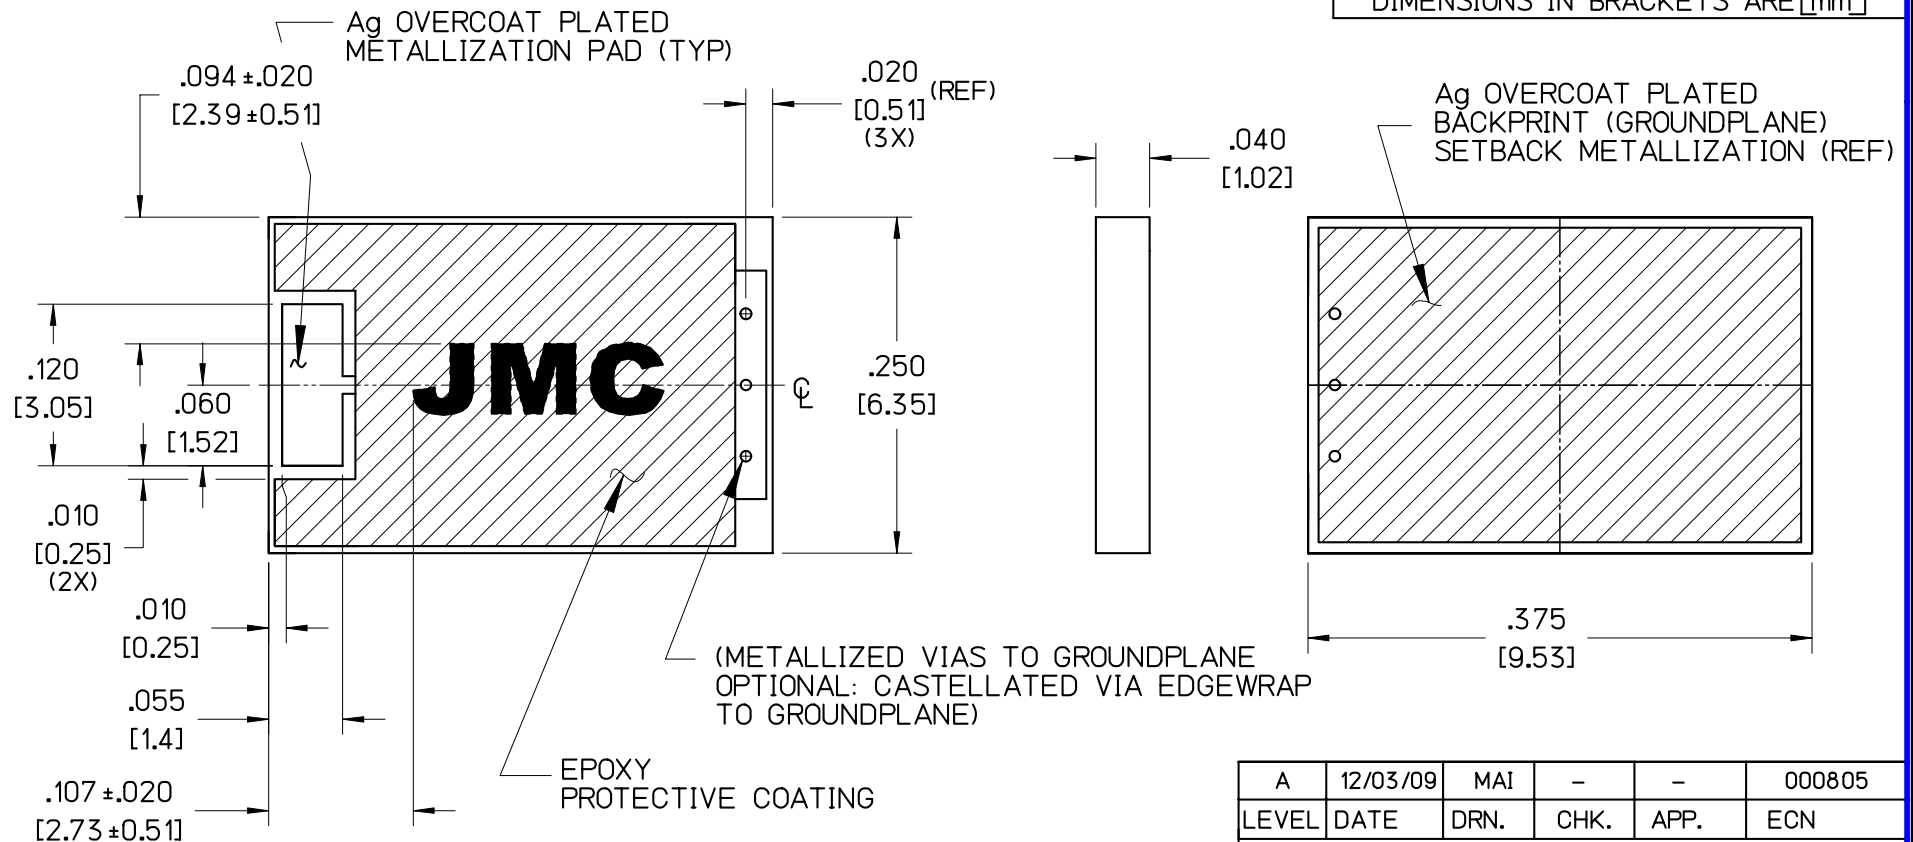

A	12/03/09	MAI	-	-	000805
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MAI	CHK.	MAI	APP.	MAI
DATE	12/03/09	DATE	12/03/09	DATE	12/03/09
SCALE					7" = 1"
.XX ± .015 [3.81]					.XXX ± .005 [1.27]



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL